

# Haier SERVICE MANUAL

---

## Wall Mounted Type DC Inverter FREE MATCH N-Series Model No.2U40S2SC1FA



### **WARNING**

This service information is designed for experienced repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product. Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or Repair the product or products dealt with in this service information by anyone else could result in serious injury or death

2017 (Qingdao Haier Air Conditioner General corp. , Ltd)  
All rights reserved. Unauthorized copying and distribution is a violation of law

## Contents

1. Introduction .....	1
2. Specifications.....	6
3. Sensors list .....	7
4. Piping diagrams .....	8
5. Operation range .....	9
6. Printed Circuit Board Connector Wiring Diagram .....	10
7. Functions and Control.....	15
8. Dimensional drawings.....	30
9. Center of gravity .....	30
10. Service Diagnosis .....	31
11. Performance and curves diagrams .....	47
12. Circuit diagrams .....	63

# 1 Introduction

## 1.1 Safety Cautions

Be sure to read the following safety cautions before conducting repair work.

The caution items are classified into “Warning” and “Caution”. The “Warning” items are especially important since they can lead to death or serious injury if they are not followed closely. The “Caution” items can also lead

to serious accidents under some conditions if they are not followed. Therefore, be sure to observe all the safety

caution items described below.

About the pictograms

△ This symbol indicates an item for which caution must be exercised.

The pictogram shows the item to which attention must be paid.

○ This symbol indicates a prohibited action.






The prohibited item or action is shown inside or near the symbol.







● This symbol indicates an action that must be taken, or an instruction.

The instruction is shown inside or near the symbol.

After the repair work is complete, be sure to conduct a test operation to ensure that the equipment operates Normally, and explain the cautions for operating the product to the customer.



### 1.1.1 Caution in Repair

Warning	
Be sure to disconnect the power cable plug from the plug socket before disassembling the equipment for a repair. Working on the equipment that is connected to a power supply can cause an electrical shock. If it is necessary to supply power to the equipment to conduct the repair or inspecting the circuits, do not touch any electrically charged sections of the equipment.	
If the refrigerant gas discharges during the repair work, do not touch the discharging refrigerant gas. The refrigerant gas can cause frostbite.	
When disconnecting the suction or discharge pipe of the compressor at the welded section, release the refrigerant gas completely at a well-ventilated place first. If there is a gas remaining inside the compressor, the refrigerant gas or cooling machine oil discharges when the pipe is disconnected, and it can cause injury.	
If the refrigerant gas leaks during the repair work, ventilate the area. The refrigerant gas can generate toxic gases when it contacts flames.	
The step-up capacitor supplies high-voltage electricity to the electrical components of the outdoor unit. Be sure to discharge the capacitor completely before conducting repair work. A charged capacitor can cause an electrical shock.	
Do not start or stop the air conditioner operation by plugging or unplugging the power cable plug. Plugging or unplugging the power cable plug to operate the equipment can cause an electrical shock or fire.	


Warning	
Do not repair the electrical components with wet hands . Working on the equipment with wet hands can cause an electrical shock	
Do not clean the air conditioner by splashing water. Washing the unit with water can cause an electrical shock.	
Be sure to provide the grounding when repairing the equipment in a humid or wet place, to avoid electrical shock.	
Be sure to turn off the power switch and unplug the power cable when cleaning the equipment. The internal fan rotates at a high speed, and cause injury.	
Do not tilt the unit when removing it. The water inside the unit can spill and wet the furniture and floor.	
Be sure to check that the cooling cycle section has cooled down sufficiently before conducting repair work. Working on the unit when the cooling cycle section is hot can cause burns.	
Use the welder in a well-ventilated place. Using the welder in an enclosed room can cause oxygen deficiency.	

### 1.1.2 Cautions Regarding Products after Repair



Warning	
Be sure to use parts listed in the service parts list of the applicable model and appropriate tools to conduct repair work. Never attempt to modify the equipment. The use of inappropriate parts or tools can cause an electrical shock, excessive heat generation or fire.	
When relocating the equipment, make sure that the new installation site has sufficient strength to withstand the weight of the equipment. If the installation site does not have sufficient strength and if the installation work is not conducted securely, the equipment can fall and cause injury.	
Be sure to install the product correctly by using the provided standard installation frame. Incorrect use of the installation frame and improper installation can cause the equipment to fall, resulting in injury.	For integral units only
Be sure to install the product securely in the installation frame mounted on a window frame. If the unit is not securely mounted, it can fall and cause injury.	For integral units only


Warning	
<p>Be sure to use an exclusive power circuit for the equipment, and follow the technical standards related to the electrical equipment, the internal wiring regulations and the instruction manual for installation when conducting electrical work.</p> <p>Insufficient power circuit capacity and improper electrical work can cause an electrical shock or fire.</p>	
<p>Be sure to use the specified cable to connect between the indoor and outdoor units. Make the connections securely and route the cable properly so that there is no force pulling the cable at the connection terminals.</p> <p>Improper connections can cause excessive heat generation or fire.</p>	
<p>When connecting the cable between the indoor and outdoor units, make sure that the terminal cover does not lift off or dismount because of the cable.</p> <p>If the cover is not mounted properly, the terminal connection section can cause an electrical shock, excessive heat generation or fire.</p>	
<p>Do not damage or modify the power cable.</p> <p>Damaged or modified power cable can cause an electrical shock or fire. Placing heavy items on the power cable, and heating or pulling the power cable can damage the cable.</p>	
<p>Do not mix air or gas other than the specified refrigerant (R-410A / R22) in the refrigerant system.</p> <p>If air enters the cooling system, an excessively high pressure results, causing equipment damage and injury.</p>	
<p>If the refrigerant gas leaks, be sure to locate the leak and repair it before charging the refrigerant. After charging refrigerant, make sure that there is no refrigerant leak.</p> <p>If the leak cannot be located and the repair work must be stopped, be sure to perform pump-down and close the service valve, to prevent the refrigerant gas from leaking into the room. The refrigerant gas itself is harmless, but it can generate toxic gases when it contacts flames, such as fan and other heaters, stoves and ranges.</p>	
<p>When replacing the coin battery in the remote controller, be sure to dispose of the old battery to prevent children from swallowing it.</p> <p>If a child swallows the coin battery, see a doctor immediately.</p>	

Caution	
<p>Installation of a leakage breaker is necessary in some cases depending on the conditions of the installation site, to prevent electrical shocks.</p>	


Do not install the equipment in a place where there is a possibility of combustible gas leaks. If a combustible gas leaks and remains around the unit, it can cause a fire.	
Be sure to install the packing and seal on the installation frame properly. If the packing and seal are not installed properly, water can enter the room and wet the furniture and floor.	

### 1.1.3 Inspection after Repair

<b>Warning</b>	
Check to make sure that the power cable plug is not dirty or loose, then insert the plug into a power outlet all the way. If the plug has dust or loose connection, it can cause an electrical shock or fire.	
If the power cable and lead wires have scratches or deteriorated, be sure to replace them. Damaged cable and wires can cause an electrical shock, excessive heat generation or fire.	

<b>Warning</b>	
Do not use a joined power cable or extension cable, or share the same power outlet with other electrical appliances since it can cause an electrical shock, excessive heat generation or fire.	





<b>Caution</b>	
Check to see if the parts and wires are mounted and connected properly, and if the connections at the soldered or crimped terminals are secure. Improper installation and connections can cause excessive heat generation, fire or an electrical shock.	
If the installation platform or frame has corroded, replace it. Corroded installation platform or frame can cause the unit to fall, resulting in injury.	

Check the grounding, and repair it if the equipment is not properly grounded. Improper grounding can cause an electrical shock.	
Be sure to measure the insulation resistance after the repair, and make sure that the resistance is 1 M ohm or higher. Faulty insulation can cause an electrical shock.	
Be sure to check the drainage of the indoor unit after the repair. Faulty drainage can cause the water to enter the room and wet the furniture and floor.	

#### 1.1.4 Using Icons

Icons are used to attract the attention of the reader to specific information. The meaning of each icon is described in the table below:

#### 1.1.5 Using Icons List

Icon	Type of Information	Description
 Note	Note	A “note” provides information that is not indispensable, but may nevertheless be valuable to the reader, such as tips and tricks.
 Caution	Caution	A “caution” is used when there is danger that the reader, through incorrect manipulation, may damage equipment, lose data, get an unexpected result or has to restart (part of) a procedure.
 Warning	Warning	A “warning” is used when there is danger of personal injury.
 Reference	Reference	A “reference” guides the reader to other places in this binder or in this manual, where he/she will find additional information on a specific topic.

## 2 Specifications

NOMINAL DISTRIBUTION SYSTEM VOLTAGE		
Phase	/	1
Frequency	Hz	50
Voltage	V	230

NOMINAL CAPACITY and NOMINAL INPUT					
		9+9		9+12	
		cooling	heating	cooling	heating
Capacity rated	KW	3.9	4.4	4.0	4.4
	Btu/h	13310	15020	13650	15020
Power Consumption(Rated)	KW	1.35	1.40	1.35	1.40
SEER/SCOP	W/W	6.2	4.0	6.2	4.0
Annual energy consumption	KWh	220	1154	226	1158
Moisture Removal	m <sup>3</sup> /h	09 single:1.2x10 <sup>-3</sup>		12 single:1.6x10 <sup>-3</sup>	

TECHNICAL SPECIFICATIONS-UNIT			
Dimensions	H*W*D	mm	540×780×270
Packaged Dimensions	H*W*D	mm	617×910×380
Weight	/	KG	34
Gross weight	/	KG	37
Sound level	Sound peessure	dB	56
	Sound power	dB	62

ELECTRICAL SPECIFICATIONS			
		cooling	heating
Nominal running current	A	4.5	4.8
Maximum running current	A	6.0	6.2
Starting current	A	1.0	1.0

TECHNICAL SPECIFICATIONS-PARTS			
		cooling	heating
Compressor	Type	Rotary Compressor	
	Model	GTD110RKQA6JT6	
	Motor output	W	867
	Oil type	RM-LP56EG or equivalent	
	Oil charge volume	L	0.46
Fan	Type	Axial fan	
	Motor output	W	40
	Air flow rate(high)	m <sup>3</sup> /h	1900
	Speed(high/low)	rpm	980/600
Heat exchanger	Type	ML fin- φ 7HI-HX tube	
	Row*stage*fitch	2*24*1.4	



TECHNICAL SPECIFICATIONS-OTHERS			
Refrigerant circuit	Refrigerant type		R32
	Refrigerant charge		KG 1.0
	Maximum allowable distance between indoor an outdoor		m 30(double) 20(single)
	Maximum allowable level difference		m 15
	Refrigerant control		EEV
Piping connections (external diameter)	liquid	mm	Φ6.35
	gas	mm	Φ9.52
	drain	mm	Φ16
Heat insulation type		Both liquid and Gas pipes	
Max. piping Length		m	30(double) 20(single)
Max. Level Difference		m	15
Chargeless		m	10
Amount of Additional Charge of Refrigerant		g/m	20

Note: the data are based on the conditions shown in the table below

cooling	heating	Piping length
Indoor: 27°CDB/19°CWB Outdoor: 35°CDB/24°CWB	Indoor:20°CDB Outdoor: 7°CDB/6°CWB	5m

#### Conversation formulae

Kcal/h= KW×860

Btu/h= KW×3414


cfm=m<sup>3</sup>/min×35.3

### 3. Sensors list


type	Description	Qty
Ambient sensor	Its used for detecting temperature of outdoor side	1
Suction sensor	Its used for detecting suction pipe temperature of compressor to adjust gas flowing	1
Defrosting sensor	Its used for controlling outdoor defrosting at heating mode	1
Discharging sensor	Its used for compressor in case of over-heat	1

## 4. Pinping diagrams

### Cooling mode

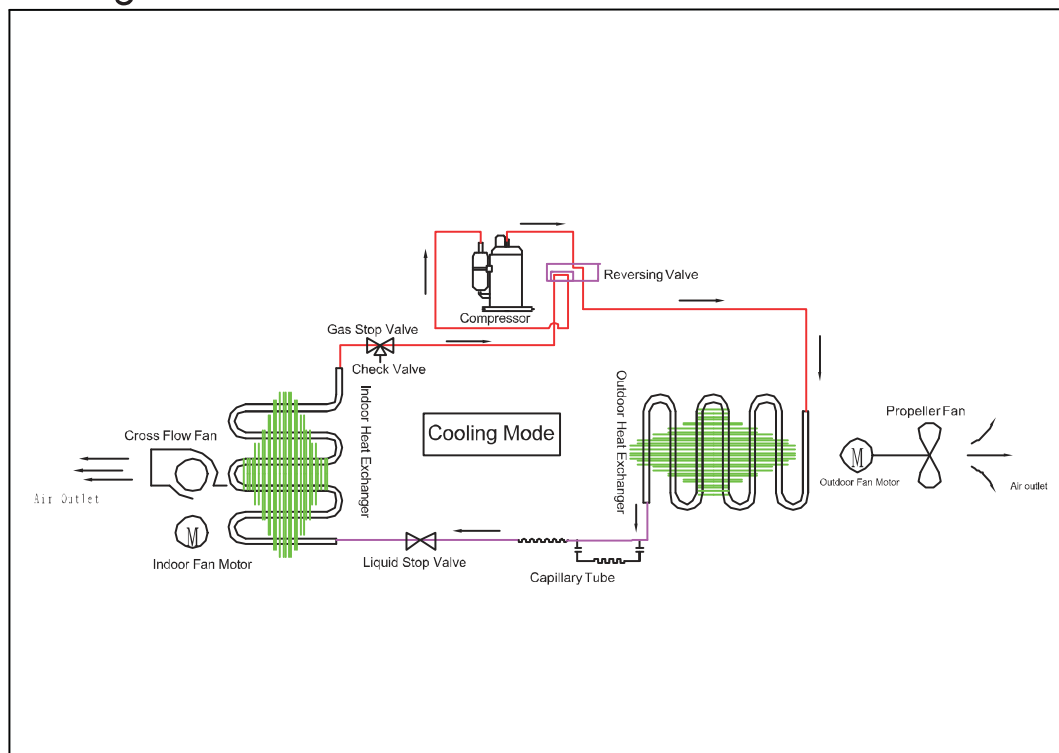



### Heating mode

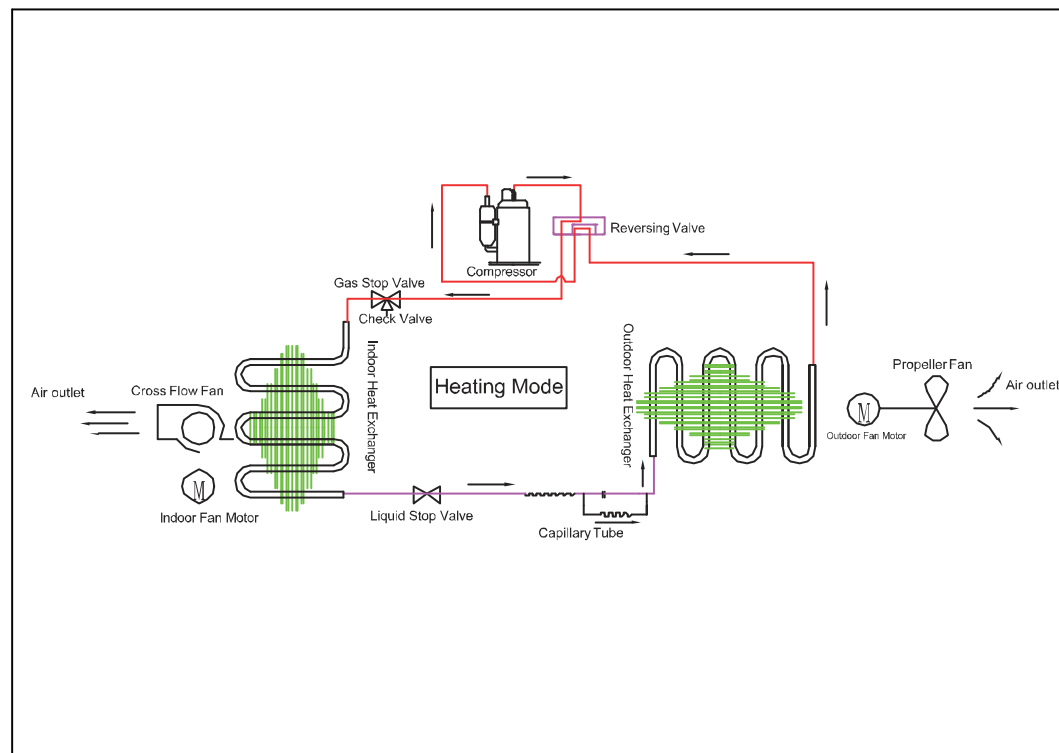

## 5. Operation range

The name of parts

Cooling

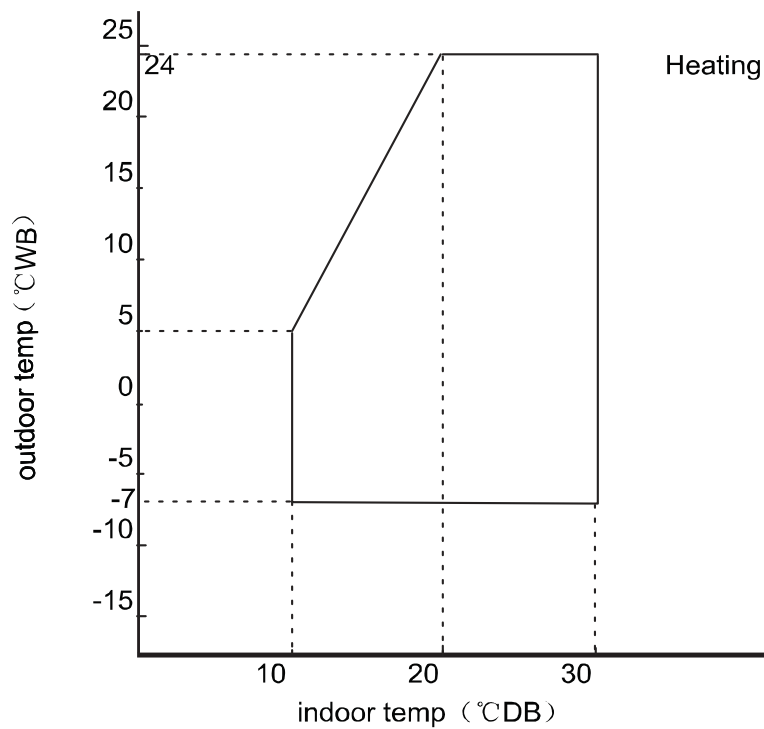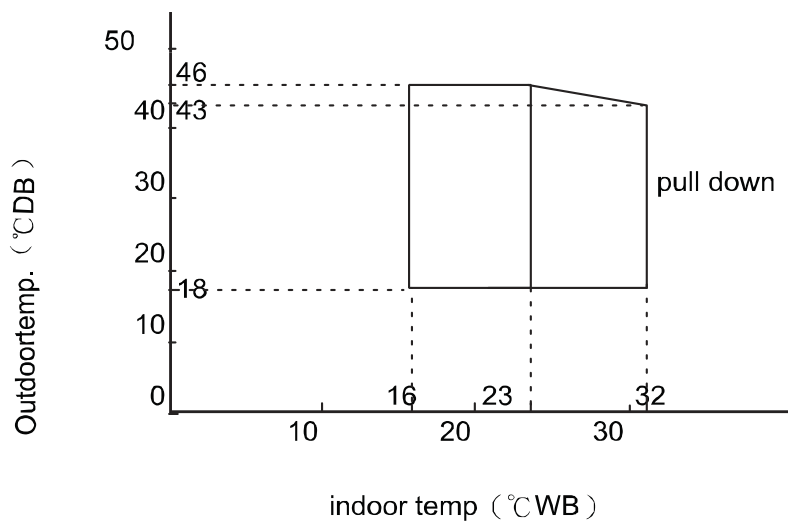

Notes:

The graphs are based on the following condition:

Equivalent piping length	5m
Level difference	0m
Air flow rate	high

## 6. Printed Circuit Board Connector Wiring Diagram

### Connectors

#### PCB (1) Control PCB

series	PCB connector	Connect with load
1	CN1	Connector for power N and L
2	CN2	
3	CN3	Connector for ground
4	CN8	
5	CN9	Connector for CN9,CN8 on the module board
6	CN10	
7	CN11	Connector for four way valve coil
8	CN15	Connector for electric expansion valves
9	CN16	
10	CN17	Connector for thermistors
11	CN18	
12	CN19	
13	CN20	
14	CN21	
15	CN47	
16	CN22	Connector for fan motor
17	CN23	Connector for DC POWER 15V and 5V to the module board
18	CN24	Connector for communicate between the control board and the module board
19	CN25	Connector to P and N of the module board
20	CN28	
21	CN36	Connector for communicate between indoor and outdoor unit
22	CN45	Connector for terminal protect

**PCB (2) Module PCB**

series	PCB connector	Connect with load
1	P (CN1)	Connector for CN28,CN25 on the control board
2	N (CN5)	
3	LO (CN6)	Connector for reactor
4	LI (CN7)	
5	AC_L(CN8)	Connector for CN10,CN9 on the control board
6	AC_N(CN9)	
7	CN2(U)	Connector for the compressor
8	CN3(V)	
9	CN4(W)	
10	CN10	Connector for the DC power 5V and 15V form the control PCB
11	CN11	Connector for communicate between the control board and the module board


**Note:** Other Designations

PCB(1) (Control PCB)


1) FUSE 1, Fuse (25A,250VAC)


2)LED 1 keep light representative normal ,if keep flash interval representative trouble Alarm

3)RV1,RV2,RV3 Varistor

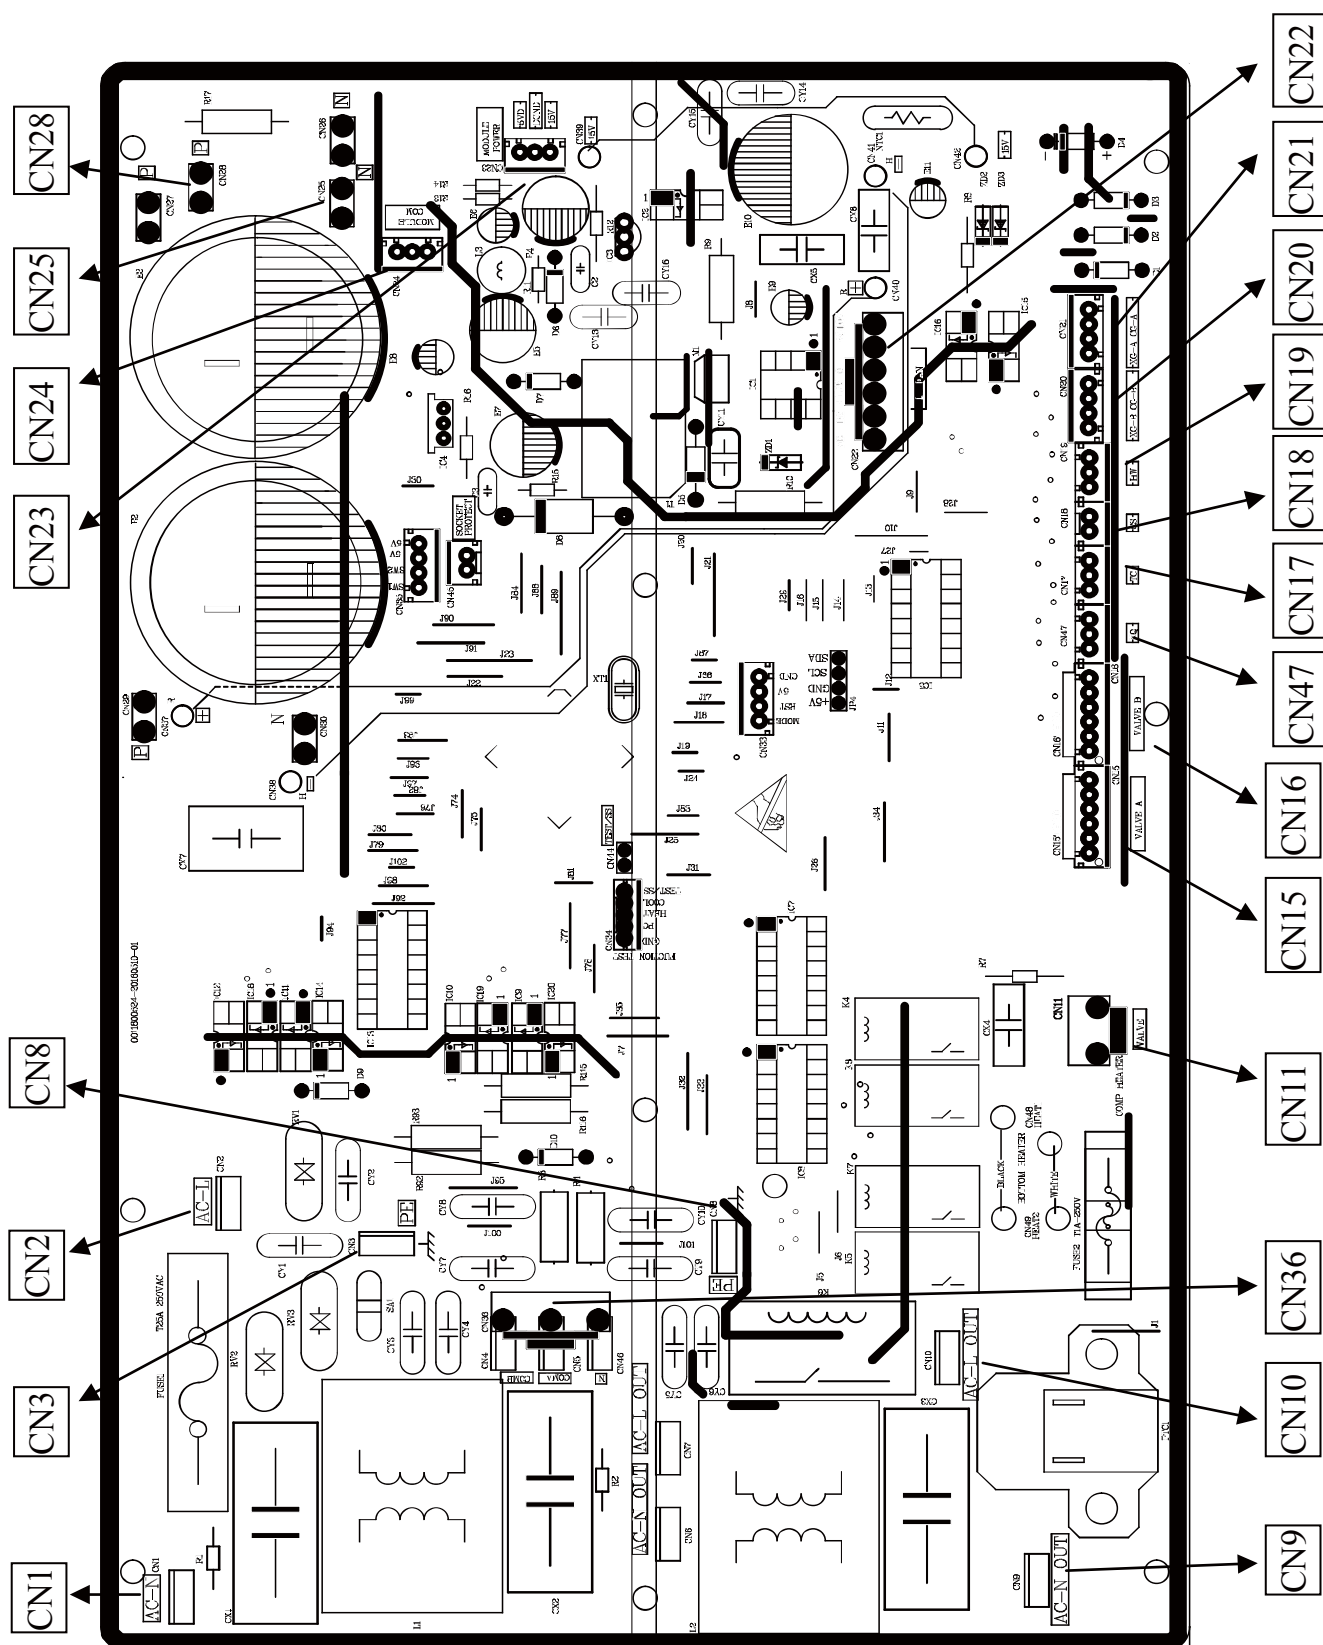

PCB(1)

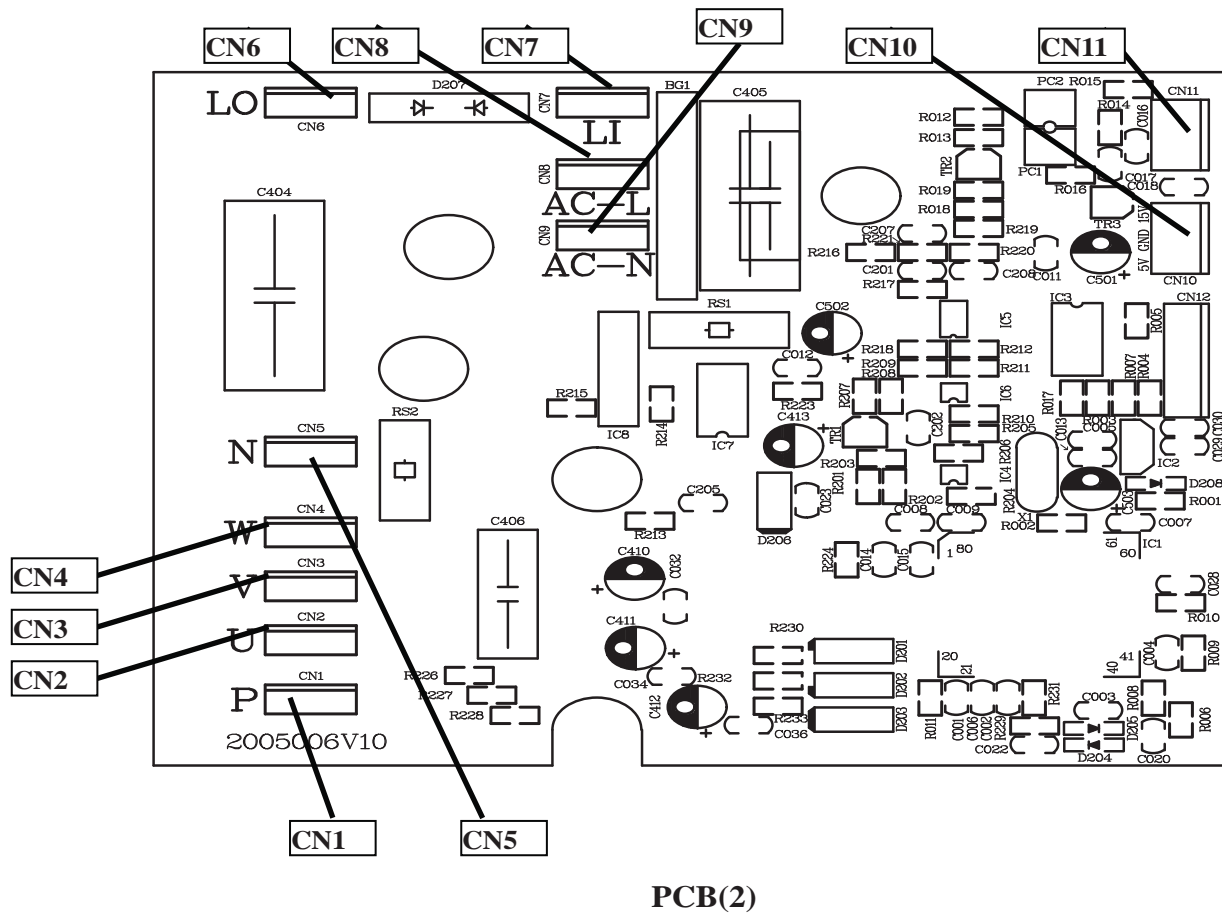

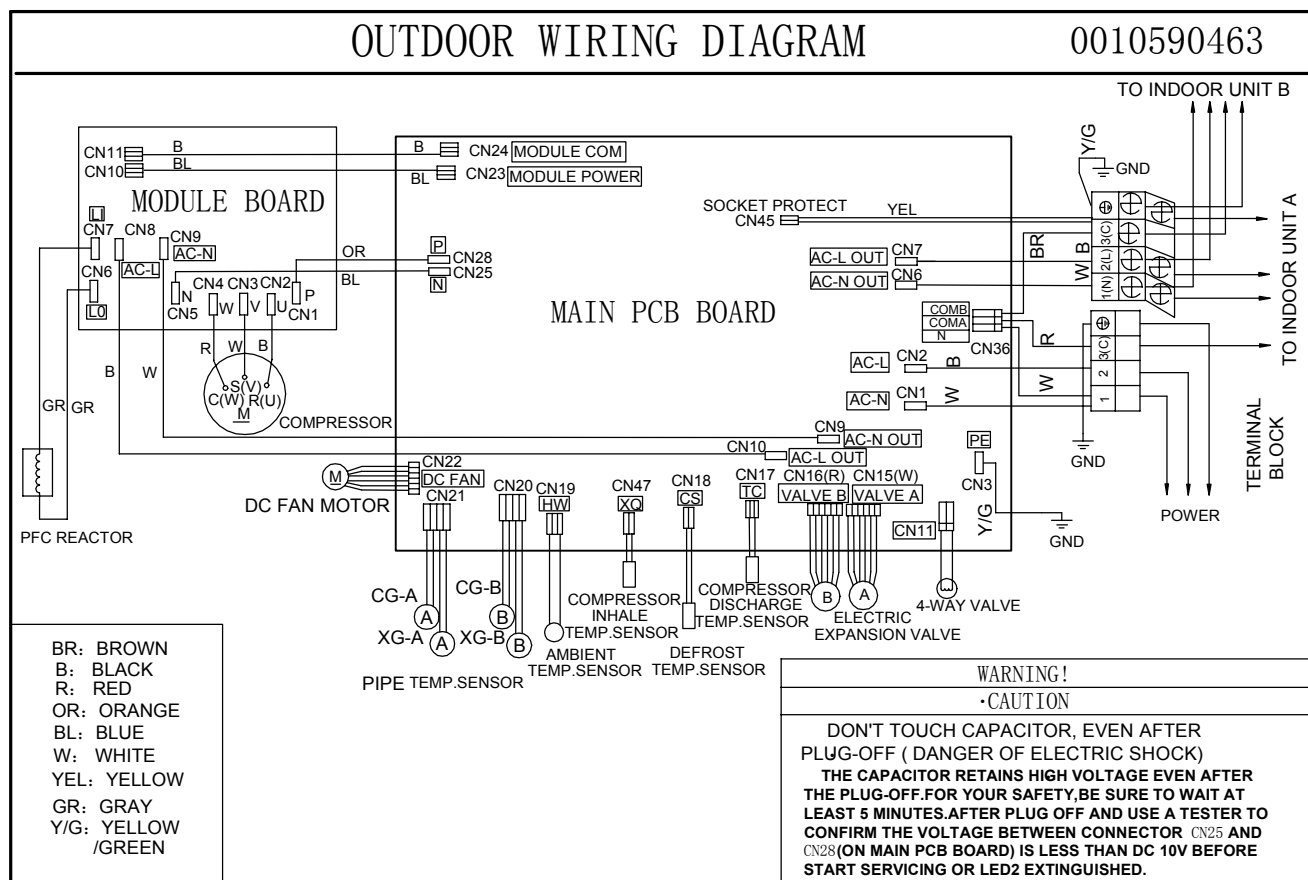



## 7 Function and Control

### 7.1 The control system of outdoor unit

#### 7.1.1 The operation frequency of outdoor unit and its control

##### 7.1.1.1 The operation frequency control of compressor

The operation frequency scope of compressor:

Mode	Minimum operation frequency	Maximum operation frequency
Heating	34Hz	96Hz
Refrigeration	34Hz	72Hz

##### 7.1.1.2 The starting of compressor

When the compressor is started for the first time, it must be kept under the conditions of 34Hz, 56Hz, 82Hz for one minute (the overheating protection of the outdoor unit air-blowing temperature, immediately decrease the frequency when the compressor is overflowing and releasing the pressure), then it can be operated towards the target frequency. When the machine runs normally, there's no such process. After starting the compressor for operation, the compressor should run according to the calculated frequency, and every determined frequency for protection should be prior to the calculated frequency.

##### 7.1.1.3 The speeds of increasing or decreasing the frequency of the compressor

The speed of increasing or decreasing the frequency rapidly 1 -----1HZ/second

The speed of increasing or decreasing the frequency slowly 2 -----1HZ/10seconds

##### 7.1.1.4 The calculation of the compressor's frequency

1)、The minimum/maximum frequency limitation

A. While refrigerating:  $F - MAX - r$  is the maximum operation frequency of the compressor;  $F - MIN - r$  is the minimum operation frequency of the compressor.

B. While heating:  $F - MAX - d$  is the maximum operation frequency of the compressor;  $F - MIN - d$  is the minimum operation frequency of the compressor.

1)、The frequency limitation which is affected by the environment temperature.

Heating mode:

Serial No.	Temperature scope	Frequency limitation
1	$T_{wh} < -12$	Max_hz8 120HZ
2	$T_{wh} < -8$	Max_hz7 120 HZ
3	$T_{wh} < -2$	Max_h z4 120HZ
4	$T_{wh} < 5$	Max_hz5 120 HZ
5	$5 < T_{wh} \leq 12$	Max_hz1 100HZ
6	$12 < T_{wh} \leq 18$	Max_hz2 56HZ
7	$18 < T_{wh}$	Max_hz6 38HZ

Remarks:  $T_{wh}$  :the environment temperature of outdoor;

The above are the maximum frequency limitations of the complete appliance which are affected by the environment, and they have nothing to do with the ability of the indoor unit.

Refrigeration/dehumidification mode:

Serial No.	Temperature scope	Frequency limitation
1	$T_{wh} \leq 16$	Max_hz1 34HZ
2	$16 < T_{wh} \leq 24$	Max_hz2 40 HZ
3	$24 < T_{wh} \leq 32$	Max_hz3 62 HZ
4	$32 < T_{wh} \leq 44$	Max_hz4 72 HZ
5	$T_{wh} > 44$	Max_hz5 40 HZ

Remarks: the above are not only the maximum frequency limitations of the complete appliance which are affected by the environment, but also the maximum ability limitation of the system. When the starting ability is not the maximum, its maximum frequency limitation is calculated by the following equations:

The frequency limitation which is affected by the temperature and under the condition of actual ability = the actual running system ability  $\times$  the maximum frequency which is limited by the temperature and under the condition of maximum ability  $\div$  the maximum designing ability of the system

$\Delta T = \sum (\Delta T_i \cdot P_i) / \sum P_i$  ( $\Delta T_i = |T_{st\_i} - T_{nh\_i}|$  the indoor environment temperature;  $P_i = i$  the ability of the indoor unit)

Refrigeration/dehumidification:

$\Delta T$	<1	=1	=2	=3	>=4
The percentage of the rated frequency P	50%	70%	100%	120%	140%

Heating mode:

$\Delta T$	<1	=1	=2	=3	>=4
The percentage of the rated frequency P	50%	70%	100%	114%	180%

$K = \sum K_i$  / the number of running machines

The indoor set airflow speed	Breeze	Low	Medium	High	Strong	Quiet	Healthy airflow
The percentage of the rated frequency $K_i$	70%	80%	90%	100%	120%	70%	70%

The calculation of the actual output frequency: when there is no healthy airflow:  $F = F_{ED} \times P \times K$

When the healthy airflow has been set:  $F = F_{ED} \times P \times K$  (airflow speed)  $\times K$  (healthy airflow)

When refrigerating, it is needed to satisfy  $F_{MIN} - d < F < F_{MAX} - d$

When heating, it is needed to satisfy  $F_{MIN} - r < F < F_{MAX} - r$

### 7.1.2: The outdoor fan control (exchange fan)

When the fan is changed among every airflow speed (including stop blowing), in order to avoid the airflow speed from skipping frequently, it must be kept under each mode for over 30 seconds, and then it can be changed to another mode (when refrigerating, the time is changed to 15 seconds).

### 7.1.2.1 The outdoor fan control when refrigerating or dehumidifying

After the compressor is started for 5 seconds, the outdoor fan is started at the medium speed at first, after 30 seconds it begins to control the airflow speed according to the temperature conditions of the outdoor environment.

The temperature of the outdoor air (Ta)	The temperature of the outdoor coil (Te)	Airflow speed
$Ta \geq 30^{\circ}\text{C}$	—	High
$26^{\circ}\text{C} \leq Ta < 30^{\circ}\text{C}$	—	Keeping the speed
$24^{\circ}\text{C} \leq Ta < 26^{\circ}\text{C}$	—	Medium
$23^{\circ}\text{C} \leq Ta < 24^{\circ}\text{C}$	—	Keeping the speed
$5^{\circ}\text{C} \leq Ta < 23^{\circ}\text{C}$	—	Low
$Ta < 5^{\circ}\text{C}$	$15^{\circ}\text{C} \leq Te$	Low
	$15^{\circ}\text{C} > Te$	Stop

Remarks: Ta: The temperature of the outdoor air; Te: The temperature of the outdoor coil.

### 7.1.2.2 The outdoor fan control when heating

The temperature of the outdoor air (Ta)	Airflow speed
$Ta \geq 22^{\circ}\text{C}$	Low
$19^{\circ}\text{C} \leq Ta < 22^{\circ}\text{C}$	Keeping the speed
$16^{\circ}\text{C} \leq Ta < 19^{\circ}\text{C}$	Medium
$14^{\circ}\text{C} \leq Ta < 16^{\circ}\text{C}$	Keeping the speed
$Ta < 14^{\circ}\text{C}$	High

Remarks: Ta: The temperature of the outdoor air; Te: The temperature of the outdoor coil.

### 7.1.3 The control of the outdoor electronic expansion valve

When starting the compressor: the opening size of the valve must be guaranteed to have entered into the standard opening size, and then the compressor can be started.

When refrigeration is in vain (the machine is shut down or is in the state of retrograde operation), the opening size of the expansion valve of the indoor unit is 5 steps;

When heating is in vain, the opening size of the expansion valve of the indoor unit is 55 steps;

When the outdoor unit is shut down, the valve is opened completely for 2 minutes, and then begin initialization.

The scope of refrigeration valve 90----480 steps

The scope of heating valve 80----480 steps

The valves are adjusted according to the degree of superheat —SHa,  $\Delta$ SHa.

### 7.1.4 Four way control

For the details of Defrost four-way valve control, see the Defrost process.

Four way working in other ways:


Under the mode of heating, open the four-way valve, when the compressor is not started or changed to non-heating mode, make sure the compressor is stopped for 2 minutes, and then close the four-way valve.

### 7.1.5 Protection function

#### 7.1.5.1 TTC high temperature-preventing protection

Once the machine is started, it can run TTC overheating protection of air-blowing, but air-blowing sensor malfunction must alarm after 4 minutes during which the compressor is started (during the course of self-detection, there's no such limitation)

Sensor detection methods: 100 times (one cycle of procedure run is one time, and about 5ms, detection method for each time: continuously sampling for 8 times, then order them and take the mean value of the middle 2 values), take the mean value.

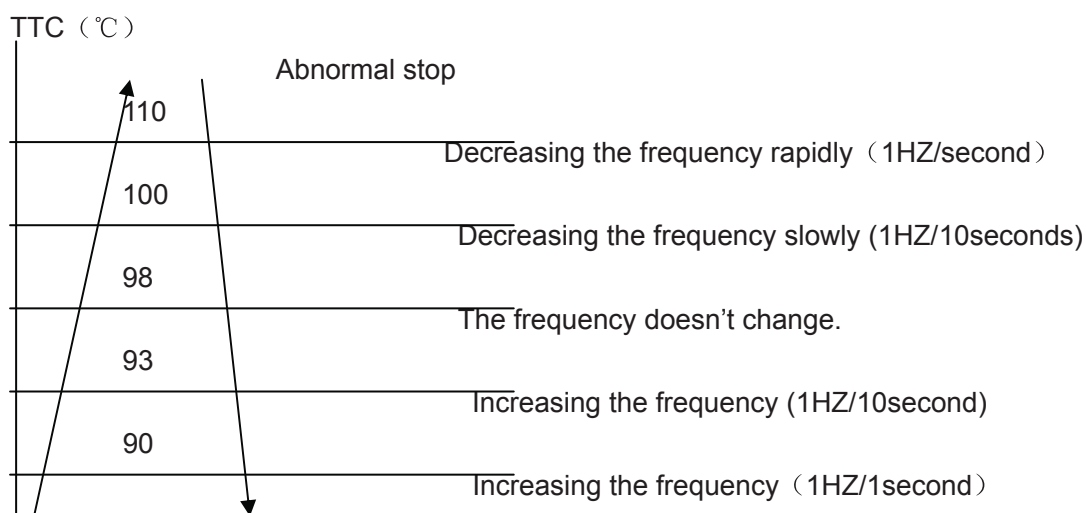


TTC $\geq$ 110°C lasts for 20 seconds. Overheating protection of air-blowing, alarm malfunction to the indoor, others don't last.

#### 7.1.5.2 TC high temperature-preventing control of the indoor heating unit

Tpg\_indoor is the highest value of the effective indoor unit (start it and it is in accord with the running state).

The indoor heat exchanger sensor tests the temperature of the indoor heat exchanger. If the temperature is higher than 55°C, decrease the rotate speed of the compressor and do the high temperature-preventing protection of the indoor heat exchanger; if the temperature of the indoor heat exchanger is lower than 47°C, recover to the normal control.

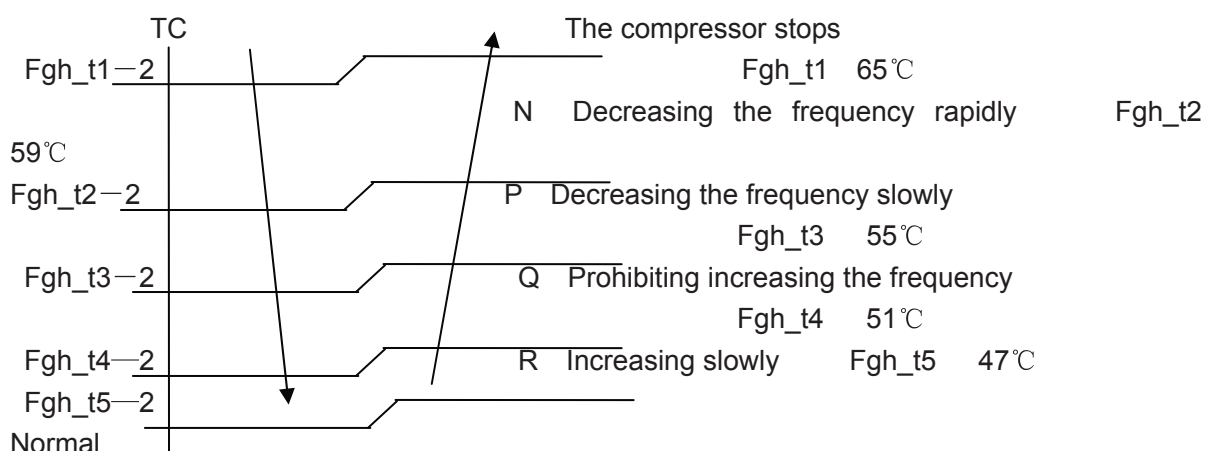

- N: Decreasing at the speed of 1HZ/1 second
- P: Decreasing at the speed of 1Hz/10 seconds
- Q: Continue to keep the last-time instruction cycle
- R: Increasing at the speed of 1Hz/10seconds

Remarks: the outdoor unit

#### 7.1.5.3 The control of preventing the overcurrent of the compressor :

- During the starting process of the compressor, if the current of the compressor is greater than 17A for 3 seconds, stop the compressor and alarm, after 3 minutes, start it again, if such state appears 3 times in 20 minutes, stop the compressor and alarm, and confirm the malfunction. Then continue to run it only after the power is off.
- During the starting process of the compressor, if the AC current is greater than 12A, the frequency of the compressor decreases at the speed of 1HZ/second.
- During the starting process of the compressor, if the AC current is greater than 10A, the frequency of the compressor decreases at the speed of 0.1HZ/second.
- During the starting process of the compressor, if the AC current is greater than 9A, the frequency of the compressor increases at the prohibited speed.
- During the starting process of the compressor, if the AC current is greater than 8A, the frequency of the compressor increases at the speed of no faster than 0.1HZ/second.

#### 7.1.5.4 The protection function of AC current:

During the starting process of the compressor, if the AC current is greater than 15A, the frequency of the compressor decreases at the speed of 1HZ/second.

During the starting process of the compressor, if the AC current is greater than 13A, the frequency of the compressor decreases at the speed of 0.1HZ/second.

During the starting process of the compressor, if the AC current is greater than 11A, the frequency of the compressor increases at the prohibited speed.

During the starting process of the compressor, if the AC current is greater than 10A, the frequency of the compressor increases at the speed of no faster than 0.1HZ/second.

Remarks: when the outdoor temperature is high, there's compensation for AC current protection.

(1)When the outdoor environment temperature is higher than 40℃, AC current protection value decreases by 10AD


(2)When the outdoor environment temperature is higher than 46℃,AC current protection value decreases by 15AD

(3)When the outdoor environment temperature is higher than 50℃,AC current protection value decreases by 20AD

#### 7.1.5.5 Antifreezing protection of the indoor heat exchanger

When refrigerating/heating, prevent freezing.

Tpg\_indoor is the minimum value of the effective indoor unit (start it and it is in accord with the running state).

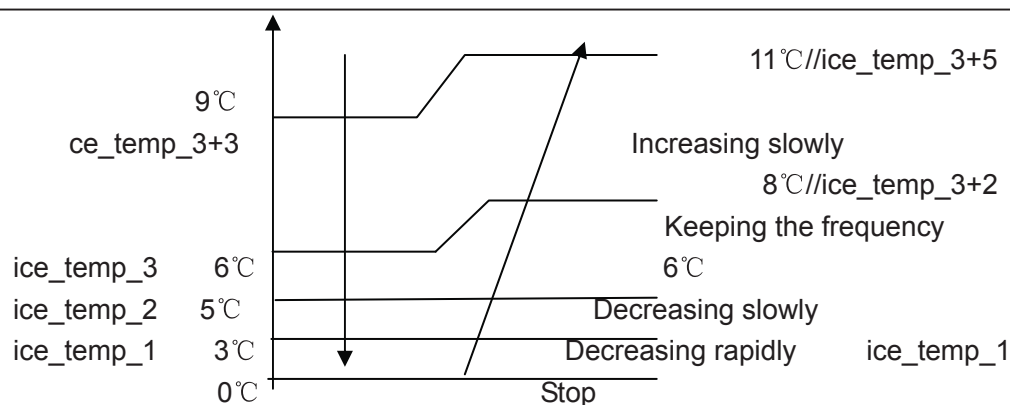

When  $T_{pg\_indoor} < ice\_temp\_1^{\circ}C$ , the frequency of the compressor decreases at the speed of 1HZ/1second.

When  $T_{pg\_indoor} < ice\_temp\_2^{\circ}C$ , the frequency of the compressor decreases at the speed of 1HZ/10seconds.

When  $T_{pg\_indoor}$  begins to rise again, and  $ice\_temp\_2 \leq T_{pg\_indoor} \leq ice\_temp\_3^{\circ}C$ , the frequency of the compressor doesn't change.

When  $ice\_temp\_3 < T_{pg\_indoor} < ice\_temp\_3+3^{\circ}C$ , the frequency of the compressor increases at the speed of 1HZ/10seconds.

For example,  $T_{pg\_indoor} \leq 0^{\circ}C$ , last for 2 minutes, and then the outdoor unit will stop, and report underload malfunction, but don't send malfunction report to the indoor.

The compressor stops for more than 3 minutes,  $T_{pg\_indoor} > ice\_temp\_3+2^{\circ}C$ , the compressor recovers.

#### 7.1.5.6 The frequency limitation of modification rate

In the field which is controlled by high frequency, if the modification rate is not high enough, the control-driven chip will enter into weak magnetic control, this will help to relieve the problem of modification rate. If during the course of weak magnetic control, the modification rate is still not high enough, enter into the control of decreasing frequency until the alarm of modification rate is relieved.

#### 7.1.5.7 The socket protect

If the socket temperature is higher than  $120^{\circ}C$ , the outdoor unit will stop and report malfunction (the LED light flashing 36 times). The compressor stops for more than 3 minutes, the compressor recovers.

#### 7.1.5.8 Temperature protection of the outdoor refrigerating coil

When the Defrost temperature and the sensor's temperature are higher than  $65^{\circ}C$ , the frequency of the compressor decreases 1hz/10seconds. Keep the frequency until it decreases to the lowest frequency. When the temperatures are lower than  $65^{\circ}C$  and higher than  $60^{\circ}C$ , keep the frequency of the compressor. When the temperatures are lower than  $60^{\circ}C$ , relieve the Defrost temperature protection.

#### 7.1.5.9 Malfunction display and malfunction handling

a)、For the complete appliance's malfunctions: Annex 2

If there's malfunction with the outdoor unit, the light of the outdoor unit will flash and its frequency is 1HZ, the number of times is according to the table, when a round of flashing is finished, the

light should be off for 5 seconds.

b)、For the units' malfunctions: Annex 1

If there's malfunction with the units, this will not affect the run of the complete appliance, but this can be displayed by the malfunction light, the light flashing frequency is 0.5HZ, the number of times is according to the malfunction table of the indoor units. When a round of flashing is finished, the light should be off for 10 seconds. Then report according to the order : unit A→unit B→unit C→unit D, that is, if there's malfunction with several units, then just report the indoor unit with the highest priority level. Among the unit malfunctions, the priority level of the communication malfunction is the highest, for others, that appears first will have the priority.

Remarks: in 3 minutes when the compressor stops, the units' malfunctions are not displayed; the complete appliance's malfunctions are prior to the units' malfunctions.

Annex 1: Malfunction codes of the out unit

Remarks: under the mode of refrigeration, the malfunctions of each unit's thin pipe temperature sensor are not reported, under the mode of heating, the malfunctions of each unit's thick pipe temperature sensor are not reported.

F12	1	Outdoor EEPROM error
F1	2	The protection of IPM
F22	3	Overcurrent protection of AC electricity for the outdoor model
F3	4	Communication fault between the IPM and outdoor PCB
F19	6	Power voltage is too high or low
F4	8	Overheat protection for Discharge temperature
F21	10	Defrost temperature sensor failure
F6	12	Ambient temperature sensor failure
F25	13	Discharge temperature sensor failure
E7	15	Communication fault between indoor and outdoor units
F11	18	deviate from the normal for the compressor
----	19	Loop of the station detect error
E9	21	High work-intense protection
---	24	Overcurrent of the compressor
---	25	Overcurrent protection for single-phase of the compressor
----	36	The socket protect

## 7.2 Value of thermistor

### Outdoor Unit

Ambient Sensor, Defrost Sensor, Pipe sensor

R25℃=10KΩ±3% B25℃/50℃=3700K±3%

Temp.(℃)	Max.(KΩ)	Normal(KΩ)	Min.(KΩ)	Tolerance(℃)	
-30	165.2170	147.9497	132.3678	-1.94	1.75
-29	155.5754	139.5600	125.0806	-1.93	1.74
-28	146.5609	131.7022	118.2434	-1.91	1.73

-27	138.1285	124.3392	111.8256	-1.89	1.71
-26	130.2371	117.4366	105.7989	-1.87	1.70
-25	122.8484	110.9627	100.1367	-1.85	1.69
-24	115.9272	104.8882	94.8149	-1.83	1.67
-23	109.4410	99.1858	89.8106	-1.81	1.66
-22	103.3598	93.8305	85.1031	-1.80	1.64
-21	97.6556	88.7989	80.6728	-1.78	1.63
-20	92.3028	84.0695	76.5017	-1.76	1.62
-19	87.2775	79.6222	72.5729	-1.74	1.60
-18	82.5577	75.4384	68.8710	-1.72	1.59
-17	78.1230	71.5010	65.3815	-1.70	1.57
-16	73.9543	67.7939	62.0907	-1.68	1.55
-15	70.0342	64.3023	58.9863	-1.66	1.54
-14	66.3463	61.0123	56.0565	-1.64	1.52
-13	62.8755	57.9110	53.2905	-1.62	1.51
-12	59.6076	54.9866	50.6781	-1.60	1.49
-11	56.5296	52.2278	48.2099	-1.58	1.47
-10	53.6294	49.6244	45.8771	-1.56	1.46
-9	50.8956	47.1666	43.6714	-1.54	1.44
-8	48.3178	44.8454	41.5851	-1.51	1.42
-7	45.8860	42.6525	39.6112	-1.49	1.40
-6	43.5912	40.5800	37.7429	-1.47	1.39
-5	41.4249	38.6207	35.9739	-1.45	1.37
-4	39.3792	36.7676	34.2983	-1.43	1.35
-3	37.4465	35.0144	32.7108	-1.41	1.33
-2	35.6202	33.3552	31.2062	-1.38	1.31
-1	33.8936	31.7844	29.7796	-1.36	1.29
0	32.2608	30.2968	28.4267	-1.34	1.28
1	30.7162	28.8875	27.1431	-1.32	1.26
2	29.2545	27.5519	25.9250	-1.29	1.24
3	27.8708	26.2858	24.7686	-1.27	1.22
4	26.5605	25.0851	23.6704	-1.25	1.20
5	25.3193	23.9462	22.6273	-1.23	1.18
6	24.1432	22.8656	21.6361	-1.20	1.16
7	23.0284	21.8398	20.6939	-1.18	1.14
8	21.9714	20.8659	19.7982	-1.15	1.12
9	20.9688	19.9409	18.9463	-1.13	1.09
10	20.0176	19.0621	18.1358	-1.11	1.07
11	19.1149	18.2270	17.3646	-1.08	1.05
12	18.2580	17.4331	16.6305	-1.06	1.03
13	17.4442	16.6782	15.9315	-1.03	1.01
14	16.6711	15.9601	15.2657	-1.01	0.99
15	15.9366	15.2770	14.6315	-0.98	0.96
16	15.2385	14.6268	14.0271	-0.96	0.94



17	14.5748	14.0079	13.4510	-0.93	0.92
18	13.9436	13.4185	12.9017	-0.91	0.90
19	13.3431	12.8572	12.3778	-0.88	0.87
20	12.7718	12.3223	11.8780	-0.86	0.85
21	12.2280	11.8126	11.4011	-0.83	0.83
22	11.7102	11.3267	10.9459	-0.81	0.80
23	11.2172	10.8634	10.5114	-0.78	0.78
24	10.7475	10.4216	10.0964	-0.75	0.75
25	10.3000	10.0000	9.7000	-0.75	0.75
26	9.8975	9.5974	9.2980	-0.76	0.76
27	9.5129	9.2132	8.9148	-0.80	0.80
28	9.1454	8.8465	8.5496	-0.84	0.83
29	8.7942	8.4964	8.2013	-0.87	0.86
30	8.4583	8.1621	7.8691	-0.91	0.90
31	8.1371	7.8428	7.5522	-0.95	0.93
32	7.8299	7.5377	7.2498	-0.98	0.97
33	7.5359	7.2461	6.9611	-1.02	1.00
34	7.2546	6.9673	6.6854	-1.06	1.04
35	6.9852	6.7008	6.4222	-1.10	1.07
36	6.7273	6.4459	6.1707	-1.13	1.11
37	6.4803	6.2021	5.9304	-1.17	1.14
38	6.2437	5.9687	5.7007	-1.21	1.18
39	6.0170	5.7454	5.4812	-1.25	1.22
40	5.7997	5.5316	5.2712	-1.29	1.25
41	5.5914	5.3269	5.0704	-1.33	1.29
42	5.3916	5.1308	4.8783	-1.37	1.33
43	5.2001	4.9430	4.6944	-1.41	1.36
44	5.0163	4.7630	4.5185	-1.45	1.40
45	4.8400	4.5905	4.3500	-1.49	1.44
46	4.6708	4.4252	4.1887	-1.53	1.47
47	4.5083	4.2666	4.0342	-1.57	1.51
48	4.3524	4.1145	3.8862	-1.61	1.55
49	4.2026	3.9686	3.7443	-1.65	1.59
50	4.0588	3.8287	3.6084	-1.70	1.62
51	3.9206	3.6943	3.4780	-1.74	1.66
52	3.7878	3.5654	3.3531	-1.78	1.70
53	3.6601	3.4416	3.2332	-1.82	1.74
54	3.5374	3.3227	3.1183	-1.87	1.78
55	3.4195	3.2085	3.0079	-1.91	1.82
56	3.3060	3.0989	2.9021	-1.95	1.85
57	3.1969	2.9935	2.8005	-2.00	1.89
58	3.0919	2.8922	2.7029	-2.04	1.93
59	2.9909	2.7948	2.6092	-2.08	1.97
60	2.8936	2.7012	2.5193	-2.13	2.01

61	2.8000	2.6112	2.4328	-2.17	2.05
62	2.7099	2.5246	2.3498	-2.22	2.09
63	2.6232	2.4413	2.2700	-2.26	2.13
64	2.5396	2.3611	2.1932	-2.31	2.17
65	2.4591	2.2840	2.1195	-2.36	2.21
66	2.3815	2.2098	2.0486	-2.40	2.25
67	2.3068	2.1383	1.9803	-2.45	2.29
68	2.2347	2.0695	1.9147	-2.49	2.34
69	2.1652	2.0032	1.8516	-2.54	2.38
70	2.0983	1.9393	1.7908	-2.59	2.42
71	2.0337	1.8778	1.7324	-2.63	2.46
72	1.9714	1.8186	1.6761	-2.68	2.50
73	1.9113	1.7614	1.6219	-2.73	2.54
74	1.8533	1.7064	1.5697	-2.78	2.58
75	1.7974	1.6533	1.5194	-2.83	2.63
76	1.7434	1.6021	1.4710	-2.88	2.67
77	1.6913	1.5528	1.4243	-2.92	2.71
78	1.6409	1.5051	1.3794	-2.97	2.75
79	1.5923	1.4592	1.3360	-3.02	2.80
80	1.5454	1.4149	1.2942	-3.07	2.84
81	1.5000	1.3721	1.2540	-3.12	2.88
82	1.4562	1.3308	1.2151	-3.17	2.93
83	1.4139	1.2910	1.1776	-3.22	2.97
84	1.3730	1.2525	1.1415	-3.27	3.01
85	1.3335	1.2153	1.1066	-3.32	3.06
86	1.2953	1.1794	1.0730	-3.38	3.10
87	1.2583	1.1448	1.0405	-3.43	3.15
88	1.2226	1.1113	1.0092	-3.48	3.19
89	1.1880	1.0789	0.9789	-3.53	3.24
90	1.1546	1.0476	0.9497	-3.58	3.28
91	1.1223	1.0174	0.9215	-3.64	3.33
92	1.0910	0.9882	0.8942	-3.69	3.37
93	1.0607	0.9599	0.8679	-3.74	3.42
94	1.0314	0.9326	0.8424	-3.80	3.46
95	1.0030	0.9061	0.8179	-3.85	3.51
96	0.9756	0.8806	0.7941	-3.90	3.55
97	0.9490	0.8558	0.7711	-3.96	3.60
98	0.9232	0.8319	0.7489	-4.01	3.64
99	0.8983	0.8088	0.7275	-4.07	3.69
100	0.8741	0.7863	0.7067	-4.12	3.74
101	0.8507	0.7646	0.6867	-4.18	3.78
102	0.8281	0.7436	0.6672	-4.23	3.83
103	0.8061	0.7233	0.6484	-4.29	3.88
104	0.7848	0.7036	0.6303	-4.34	3.92

105	0.7641	0.6845	0.6127	-4.40	3.97
106	0.7441	0.6661	0.5957	-4.46	4.02
107	0.7247	0.6482	0.5792	-4.51	4.07
108	0.7059	0.6308	0.5632	-4.57	4.12
109	0.6877	0.6140	0.5478	-4.63	4.16
110	0.6700	0.5977	0.5328	-4.69	4.21
111	0.6528	0.5820	0.5183	-4.74	4.26
112	0.6361	0.5667	0.5043	-4.80	4.31
113	0.6200	0.5518	0.4907	-4.86	4.36
114	0.6043	0.5374	0.4775	-4.92	4.41
115	0.5891	0.5235	0.4648	-4.98	4.45
116	0.5743	0.5100	0.4524	-5.04	4.50
117	0.5600	0.4968	0.4404	-5.10	4.55
118	0.5460	0.4841	0.4288	-5.16	4.60
119	0.5325	0.4717	0.4175	-5.22	4.65
120	0.5194	0.4597	0.4066	-5.28	4.70

### Discharge Sensor

R80℃=50K  $\Omega$   $\pm$  3%

B25/80℃=4450K  $\pm$  3%

Temp. (℃)	Max. (K $\Omega$ )	Normal (K $\Omega$ )	Min. (K $\Omega$ )	Tolerance (℃)	
-30	14646.0505	12061.7438	9924.4999	-2.96	2.45
-29	13654.1707	11267.8730	9290.2526	-2.95	2.44
-28	12735.8378	10531.3695	8700.6388	-2.93	2.44
-27	11885.1336	9847.7240	8152.2338	-2.92	2.43
-26	11096.6531	9212.8101	7641.8972	-2.91	2.42
-25	10365.4565	8622.8491	7166.7474	-2.90	2.42
-24	9687.0270	8074.3787	6724.1389	-2.88	2.41
-23	9057.2314	7564.2244	6311.6413	-2.87	2.41
-22	8472.2852	7089.4741	5927.0206	-2.86	2.40
-21	7928.7217	6647.4547	5568.2222	-2.84	2.39
-20	7423.3626	6235.7109	5233.3554	-2.83	2.39
-19	6953.2930	5851.9864	4920.6791	-2.82	2.38
-18	6515.8375	5494.2064	4628.5894	-2.80	2.37
-17	6108.5393	5160.4621	4355.6078	-2.79	2.37
-16	5729.1413	4848.9963	4100.3708	-2.77	2.36
-15	5375.5683	4558.1906	3861.6201	-2.76	2.35
-14	5045.9114	4286.5535	3638.1938	-2.75	2.34
-13	4738.4141	4032.7098	3429.0191	-2.73	2.34
-12	4451.4586	3795.3910	3233.1039	-2.72	2.33
-11	4183.5548	3573.4260	3049.5312	-2.70	2.32
-10	3933.3289	3365.7336	2877.4527	-2.69	2.31
-9	3699.5139	3171.3148	2716.0828	-2.67	2.30
-8	3480.9407	2989.2460	2564.6945	-2.66	2.29

-7	3276.5302	2818.6731	2422.6139	-2.64	2.28
-6	3085.2854	2658.8058	2289.2164	-2.63	2.28
-5	2906.2851	2508.9126	2163.9230	-2.61	2.27
-4	2738.6777	2368.3158	2046.1961	-2.60	2.26
-3	2581.6752	2236.3876	1935.5371	-2.58	2.25
-2	2434.5487	2112.5459	1831.4826	-2.56	2.24
-1	2296.6230	1996.2509	1733.6024	-2.55	2.23
0	2167.2730	1887.0018	1641.4966	-2.53	2.22
1	2045.9191	1784.3336	1554.7931	-2.52	2.21
2	1932.0242	1687.8144	1473.1460	-2.50	2.20
3	1825.0899	1597.0431	1396.2333	-2.48	2.19
4	1724.6540	1511.6468	1323.7551	-2.47	2.17
5	1630.2870	1431.2787	1255.4324	-2.45	2.16
6	1541.5904	1355.6163	1191.0048	-2.43	2.15
7	1458.1938	1284.3593	1130.2298	-2.41	2.14
8	1379.7528	1217.2282	1072.8813	-2.40	2.13
9	1305.9472	1153.9626	1018.7481	-2.38	2.12
10	1236.4792	1094.3200	967.6334	-2.36	2.11
11	1171.0715	1038.0743	919.3533	-2.35	2.09
12	1109.4661	985.0146	873.7359	-2.33	2.08
13	1051.4226	934.9440	830.6210	-2.31	2.07
14	996.7169	887.6792	789.8583	-2.29	2.06
15	945.1404	843.0486	751.3077	-2.27	2.04
16	896.4981	800.8922	714.8380	-2.26	2.03
17	850.6086	761.0603	680.3265	-2.24	2.02
18	807.3024	723.4134	647.6580	-2.22	2.00
19	766.4212	687.8205	616.7252	-2.20	1.99
20	727.8172	654.1596	587.4271	-2.18	1.98
21	691.3524	622.3161	559.6694	-2.16	1.96
22	656.8979	592.1831	533.3634	-2.14	1.95
23	624.3328	563.6604	508.4261	-2.12	1.93
24	593.5446	536.6540	484.7796	-2.10	1.92
25	564.4275	511.0760	462.3510	-2.09	1.90
26	536.9865	486.9352	441.1516	-2.07	1.89
27	511.0105	464.0500	421.0258	-2.05	1.87
28	486.4151	442.3499	401.9146	-2.03	1.86
29	463.1208	421.7683	383.7626	-2.01	1.84
30	441.0535	402.2430	366.5175	-1.99	1.83
31	420.1431	383.7151	350.1301	-1.97	1.81
32	400.3242	366.1295	334.5542	-1.95	1.80
33	381.5350	349.4341	319.7460	-1.93	1.78
34	363.7176	333.5801	305.6645	-1.90	1.76
35	346.8176	318.5216	292.2709	-1.88	1.75
36	330.7839	304.2151	279.5286	-1.86	1.73


37	315.5682	290.6199	267.4031	-1.84	1.71
38	301.1254	277.6976	255.8620	-1.82	1.70
39	287.4128	265.4119	244.8745	-1.80	1.68
40	274.3905	253.7288	234.4118	-1.78	1.66
41	262.0206	242.6161	224.4465	-1.76	1.64
42	250.2676	232.0436	214.9529	-1.74	1.63
43	239.0983	221.9825	205.9065	-1.71	1.61
44	228.4809	212.4060	197.2844	-1.69	1.59
45	218.3860	203.2887	189.0648	-1.67	1.57
46	208.7855	194.6066	181.2273	-1.65	1.55
47	199.6531	186.3369	173.7524	-1.63	1.54
48	190.9639	178.4584	166.6217	-1.60	1.52
49	182.6945	170.9508	159.8181	-1.58	1.50
50	174.8228	163.7951	153.3249	-1.56	1.48
51	167.3280	156.9733	147.1268	-1.53	1.46
52	160.1904	150.4683	141.2090	-1.51	1.44
53	153.3914	144.2641	135.5577	-1.49	1.42
54	146.9136	138.3454	130.1598	-1.47	1.40
55	140.7403	132.6980	125.0027	-1.44	1.38
56	134.8559	127.3081	120.0746	-1.42	1.36
57	129.2457	122.1630	115.3645	-1.40	1.34
58	123.8956	117.2504	110.8618	-1.37	1.32
59	118.7926	112.5589	106.5564	-1.35	1.30
60	113.9241	108.0776	102.4388	-1.32	1.28
61	109.2784	103.7961	98.5000	-1.30	1.26
62	104.8443	99.7046	94.7315	-1.28	1.23
63	100.6112	95.7939	91.1253	-1.25	1.21
64	96.5692	92.0553	87.6735	-1.23	1.19
65	92.7088	88.4805	84.3690	-1.20	1.17
66	89.0211	85.0614	81.2048	-1.18	1.15
67	85.4976	81.7908	78.1744	-1.15	1.12
68	82.1303	78.6615	75.2715	-1.13	1.10
69	78.9116	75.6668	72.4902	-1.10	1.08
70	75.8343	72.8004	69.8249	-1.08	1.06
71	72.8916	70.0561	67.2703	-1.05	1.03
72	70.0770	67.4283	64.8213	-1.03	1.01
73	67.3844	64.9115	62.4731	-1.00	0.99
74	64.8080	62.5006	60.2211	-0.98	0.96
75	62.3423	60.1906	58.0609	-0.95	0.94
76	59.9821	57.9770	55.9885	-0.92	0.92
77	57.7223	55.8552	53.9998	-0.90	0.89
78	55.5583	53.8210	52.0912	-0.87	0.87
79	53.4856	51.8706	50.2591	-0.85	0.84
80	51.5000	50.0000	48.5000	-0.85	0.84

81	49.7063	48.2057	46.7083	-0.85	0.85
82	47.9835	46.4842	44.9911	-0.89	0.89
83	46.3286	44.8323	43.3452	-0.93	0.92
84	44.7385	43.2468	41.7672	-0.96	0.95
85	43.2105	41.7248	40.2540	-1.00	0.99
86	41.7386	40.2604	38.7996	-1.03	1.02
87	40.3241	38.8545	37.4048	-1.07	1.06
88	38.9643	37.5045	36.0668	-1.11	1.09
89	37.6569	36.2078	34.7831	-1.14	1.13
90	36.3996	34.9622	33.5513	-1.18	1.16
91	35.1903	33.7653	32.3689	-1.22	1.19
92	34.0269	32.6151	31.2338	-1.26	1.23
93	32.9075	31.5096	30.1438	-1.30	1.27
94	31.8302	30.4467	29.0970	-1.33	1.30
95	30.7933	29.4246	28.0915	-1.37	1.34
96	29.7950	28.4417	27.1254	-1.41	1.37
97	28.8337	27.4961	26.1970	-1.45	1.41
98	27.9078	26.5864	25.3048	-1.49	1.44
99	27.0160	25.7110	24.4470	-1.53	1.48
100	26.1569	24.8685	23.6222	-1.57	1.52
101	25.3290	24.0574	22.8291	-1.61	1.55
102	24.5311	23.2765	22.0662	-1.65	1.59
103	23.7620	22.5245	21.3323	-1.69	1.63
104	23.0205	21.8002	20.6261	-1.73	1.66
105	22.3055	21.1025	19.9465	-1.77	1.70
106	21.6159	20.4303	19.2924	-1.81	1.74
107	20.9508	19.7825	18.6626	-1.85	1.77
108	20.3091	19.1582	18.0563	-1.89	1.81
109	19.6899	18.5564	17.4723	-1.93	1.85
110	19.0924	17.9761	16.9098	-1.98	1.89
111	18.5157	17.4166	16.3680	-2.02	1.93
112	17.9590	16.8769	15.8458	-2.06	1.96
113	17.4214	16.3564	15.3427	-2.10	2.00
114	16.9023	15.8542	14.8577	-2.15	2.04
115	16.4010	15.3696	14.3902	-2.19	2.08
116	15.9167	14.9020	13.9394	-2.23	2.12
117	15.4489	14.4506	13.5047	-2.27	2.16
118	14.9968	14.0149	13.0855	-2.32	2.19
119	14.5599	13.5942	12.6811	-2.36	2.23
120	14.1376	13.1879	12.2909	-2.41	2.27
121	13.7294	12.7955	11.9144	-2.45	2.31
122	13.3347	12.4165	11.5510	-2.50	2.35
123	12.9531	12.0503	11.2003	-2.54	2.39
124	12.5840	11.6965	10.8617	-2.58	2.43

125	12.2270	11.3545	10.5348	-2.63	2.47
126	11.8817	11.0240	10.2191	-2.68	2.51
127	11.5475	10.7046	9.9142	-2.72	2.55
128	11.2242	10.3957	9.6197	-2.77	2.59
129	10.9112	10.0970	9.3352	-2.81	2.63
130	10.6084	9.8082	9.0602	-2.86	2.67
131	10.3151	9.5288	8.7945	-2.91	2.71
132	10.0312	9.2586	8.5378	-2.95	2.75
133	9.7563	8.9971	8.2895	-3.00	2.80
134	9.4901	8.7441	8.0495	-3.05	2.84
135	9.2322	8.4993	7.8175	-3.09	2.88
136	8.9824	8.2623	7.5931	-3.14	2.92
137	8.7404	8.0329	7.3760	-3.19	2.96
138	8.5059	7.8108	7.1660	-3.24	3.00
139	8.2787	7.5958	6.9629	-3.29	3.04
140	8.0584	7.3875	6.7664	-3.33	3.09


## 8. Dimensional drawings

unit: mm

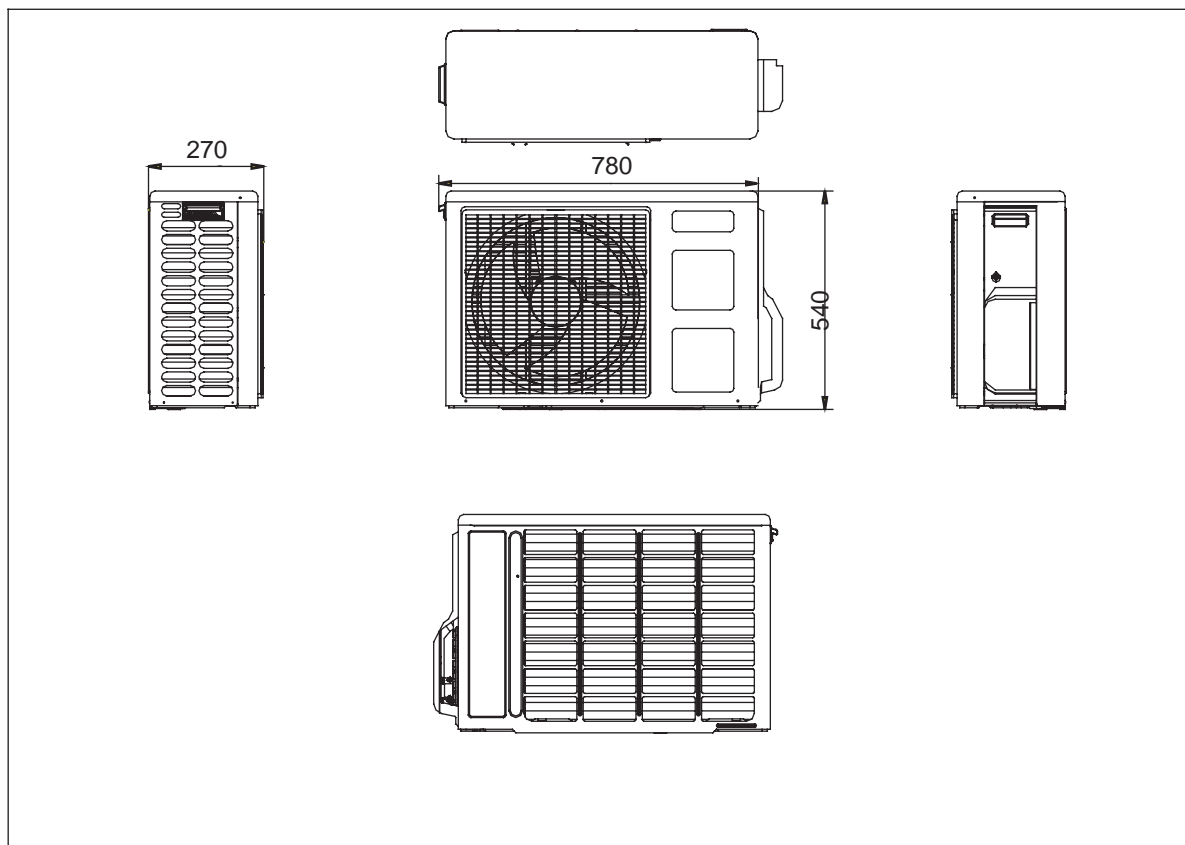

## 9. Center of gravity

unit: mm

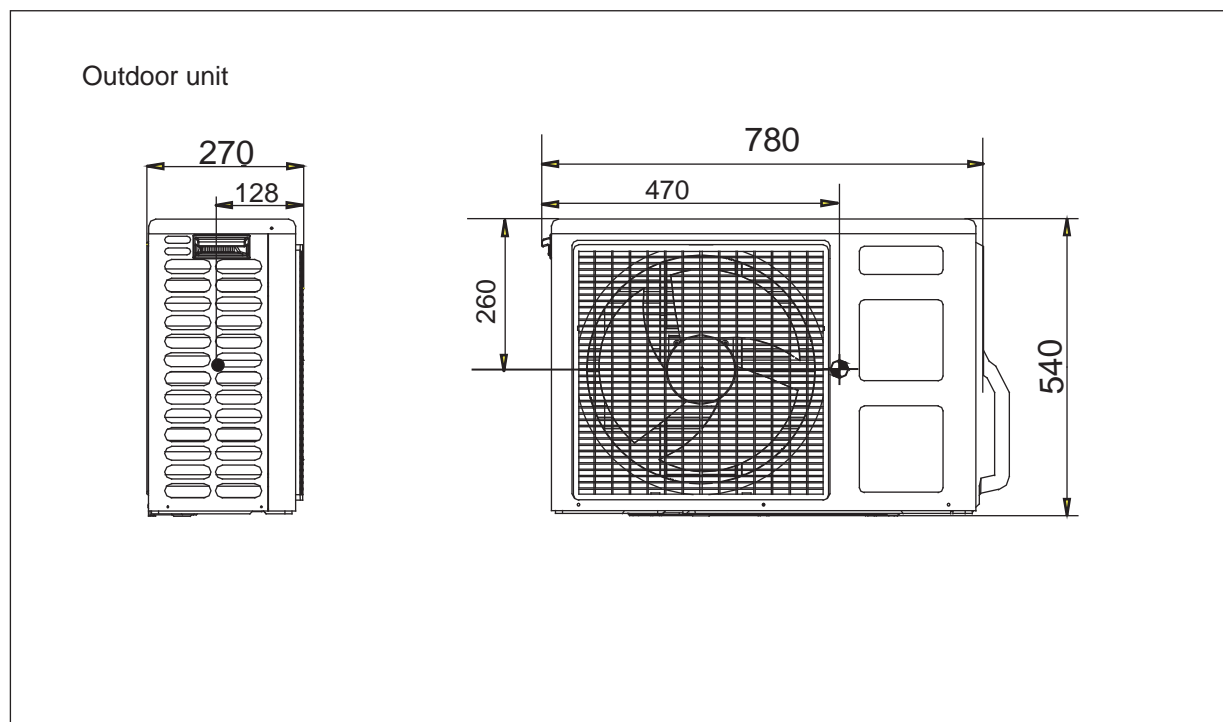







## 10 Service Diagnosis

### 10.1 Caution for Diagnosis

The operation lamp flashes when any of the following errors is detected.

1. When a protection device of the indoor or outdoor unit is activated or when the thermistor malfunctions, disabling equipment operation.
2. When a signal transmission error occurs between the indoor and outdoor units. In either case, conduct the diagnostic procedure described in the following pages.

### 10.2 Parameter of primary electronic appliance

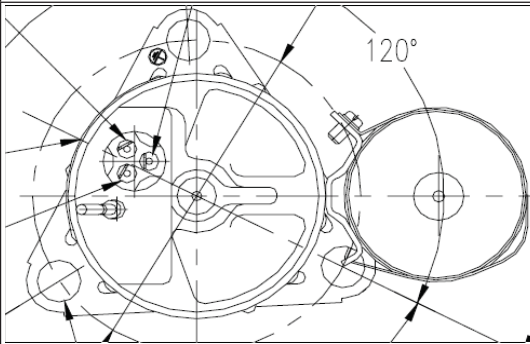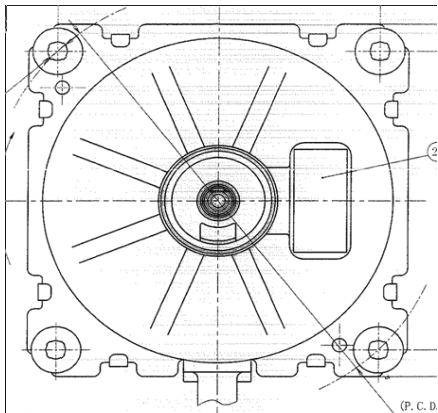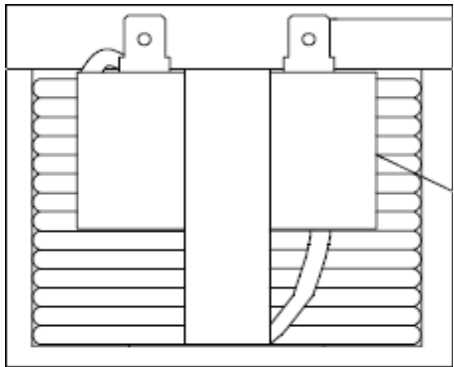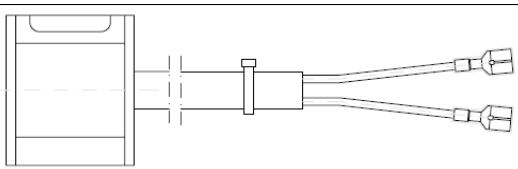N O	Nam e	Param eter	P icture
1	Compressor	Rated voltage:220V Rated current:2.90A Rated frequency:50Hz Re sistanc e: 1.867Ω	
2	Fan motor	Rated voltage: 310V Rated current:0.305-0.375A Rated frequency:50Hz Rated power:40W	
3	Reactor	Rated voltage:16.49V±10% Rated current:10.5A Rated frequency:50Hz Rated inductance:5.0mH±10%	
4	4-way valve	Rated voltage:220-240V Rated frequency:50/60Hz Power :4.5/3.5W	

## 10.3 Problem Symptoms and Measures

Symptom	Check Item	Details of Measure
None of the units operates	Check the power supply.	Check to make sure that the rated voltage is supplied.
	Check the indoor PCB	Check to make sure that the indoor PCB is broken
Operation sometimes stops.	Check the power supply.	A power failure of 2 to 10 cycles can stop air conditioner operation.
Equipment operates but does not cool, or does not heat (only for heat pump)	Check for faulty operation of the electronic expansion valve.	Set the units to cooling operation, and compare the temperatures of the liquid side connection pipes of the connection section among rooms to check the opening and closing operation of the electronic expansion valves of the individual units.
	Diagnosis by service port pressure and operating current.	Check for insufficient gas.
Large operating noise and vibrations	Check the installation condition.	Check to make sure that the required spaces for installation (specified in the Technical Guide, etc.) are provided.

## 10.4 Error Codes and Description indoor display

	Code indication			fault description	Reference Page
	Indoor displaying panel code indication		Outdoor (LED1 flash times)		
	Other display	Only For 498 and 498A display (Red/Green Time Run □0n ★Flash ■Off ,)			
Indoor and Outdoor	E7	■ ■ ★	15	Communication fault between indoor and outdoor units	Page .43
Indoor Malfunction	E1	★ ■ ■	--	Room temperature sensor failure	Page 34.
	E2	★ □ □	--	Heat-exchange sensor failure	Page 34.
	E4	★ □ ★	--	Indoor EEPROM error	Page 35.
	E14	■ □ ★	--	Indoor fan motor malfunction	Page 36
Outdoor Malfunction	F12	■ ★ ■	1	Outdoor EEPROM error	Page .35
	F1	□ ★ ★	2	The protection of IPM	Page .38
	F22	★ ★ ■	3	Overcurrent protection of AC electricity for the outdoor model	Page .39
	F3	■ ★ ■	4	Communication fault between the IPM and outdoor PCB	Page.40
	F19	■ ★ □	6	Power voltage is too high or low	Page .41
	F4	■ ★ ■	8	Overheat protection for Discharge temperature	Page .42
	F21	□ □ ★	10	Defrost temperature sensor failure	Page 34.
	F7	■ ★ ■	11	Suction temperature sensor failure	Page .34
	F6	□ ★ ■	12	Ambient temperature sensor failure	Page .3 4
	F25	★ □ ■	13	Discharge temperature sensor failure	Page .3 4
	F11	■ ★ ■	18	deviate from the normal for the compressor	Page .45
	F28	■ ★ ■	19	Loop of the station detect error	Page .45
	F2	■ ★ □	24	Overcurrent of the compressor	Page .39
	F23	■ ★ □	25	Overcurrent protectionfor single-phase of the compressor	Page .39
	F8	■ ★ □	9	Outdoor DC fan motor fault	Page .37

### 10.4.1 Thermistor or Related Abnormality

Indoor Display	E1: Room temperature sensor failure E2: Heat-exchange sensor failure
Outdoor display	LED1 flash 10 times: Defrost temperature sensor failure LED1 flash 11 times: Suction temperature sensor failure LED1 flash 12 times: Ambient temperature sensor failure LED1 flash 13 times: Discharge temperature sensor failure

#### Method of Malfunction Detection

The temperatures detected by the thermistors are used to determine thermistor errors

#### Malfunction Decision Conditions

When the thermistor input is more than 4.92V or less than 0.08V during compressor operation.


- Note: The values vary slightly in some models

#### Supposed Causes

- Faulty connector connection
- Faulty thermistor
- Faulty PCB


#### Troubleshooting

\* Caution Be sure to turn off power switch before connect or disconnect connector, or else parts damage may be occurred.

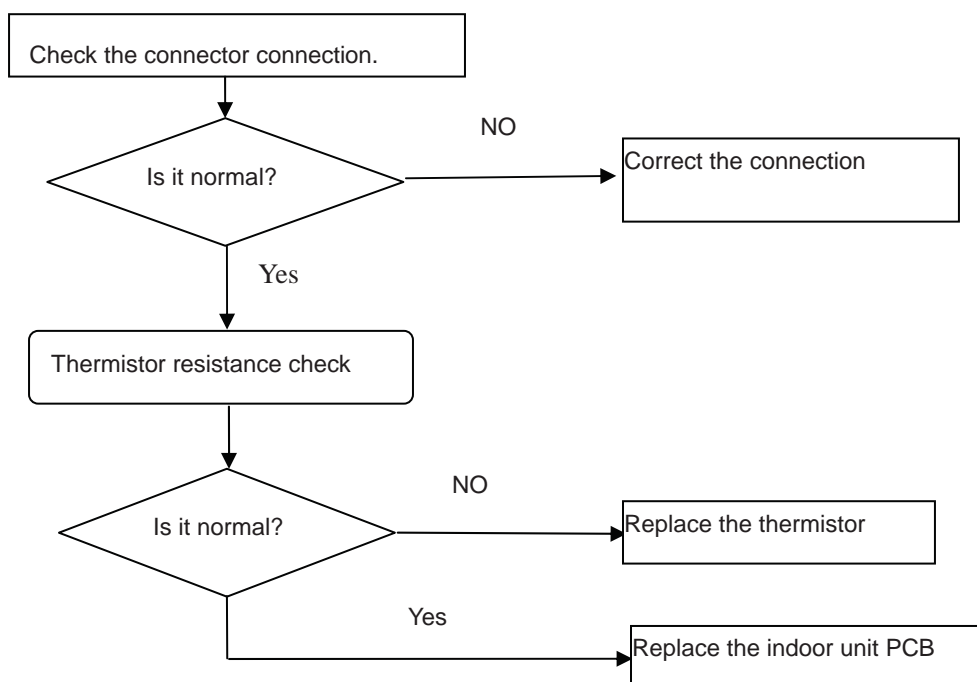

Thermistor resistance check method:

Remove the connector of the thermistor on the PCB, and measure the resistance of thermistor using tester. The relationship between normal temperature and resistance is shown in the value of indoor thermistor.

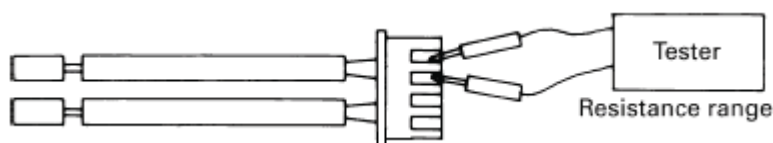

10.4.2 EEPROM abnormal

Indoor Display

Indoor display

E4: Indoor EEPROM error

F12: Outdoor EEPROM error; Outdoor LED1 flash 1 times

Method of malfunction detection

The Data detected by the EEPROM are used to determine MCU

Malfunction detection conditions

When the data of EEPROM is error or the EEPROM is damaged

Supposed Causes

- Faulty EEPROM data
- Faulty EEPROM
- Faulty PCB

Troubleshooting

\* Caution Be sure to turn off power switch before connect or disconnect connector, or parts damage may be occurred.

Replace the indoor or outdoor mainboard.

## 10.4.3 Indoor DC fan motor fault

Indoor display

E14

DC fan motor is detected by checking the fan running condition and so on

when the detected rotation feedback signal don't received in 2 minutes

■ DC fan motor protection dues to the DC fan motor faulty

■ DC fan motor protection dues to faulty PCB


\* Caution Be sure to turn off power switch before connect or disconnect connector, or parts damage

Method of  
malfunction detectionMalfunction detection  
conditionsSupposed  
Causes

Troubleshooting

may be occurred.

parts damage may

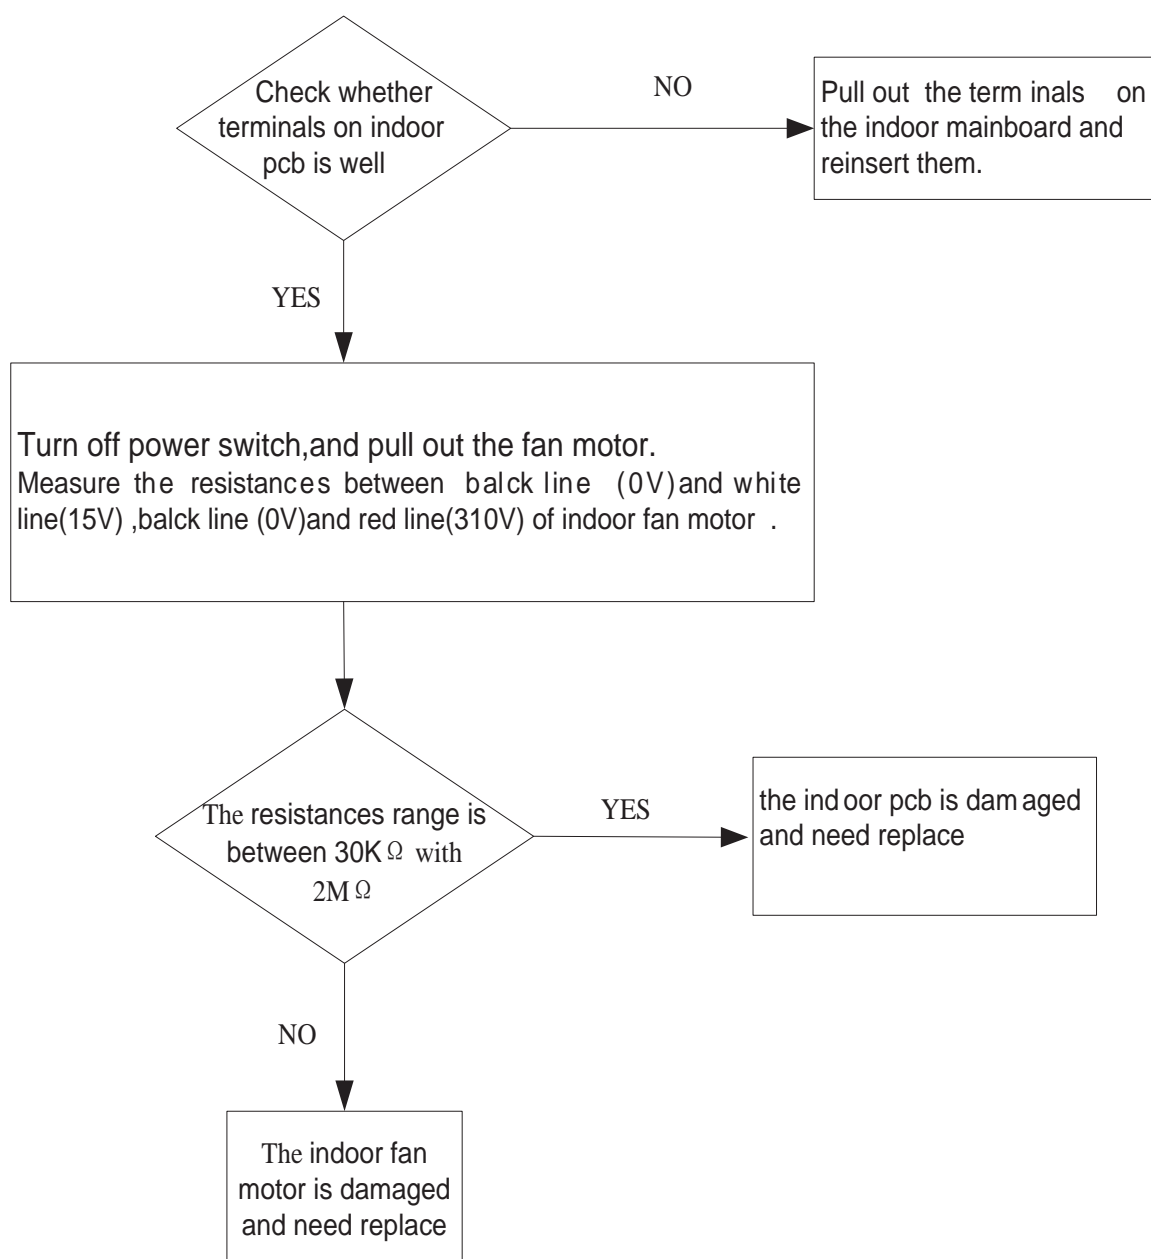

## 10.4.4 Outdoor DC fan motor fault

Outdoor display LED1 flash 9 times

Method of malfunction detection

DC fan motor is detected by checking the fan running condition and so on

Malfunction detection conditions

when the detected rotation feedback signal don't received in 2 minutes


Supposed Causes

- DC fan motor protection dues to the DC fan motor faulty
- DC fan motor protection dues to faulty PCB

Troubleshooting

\* Caution Be sure to turn off power switch before connect or disconnect connector, or parts damage

may be occurred.

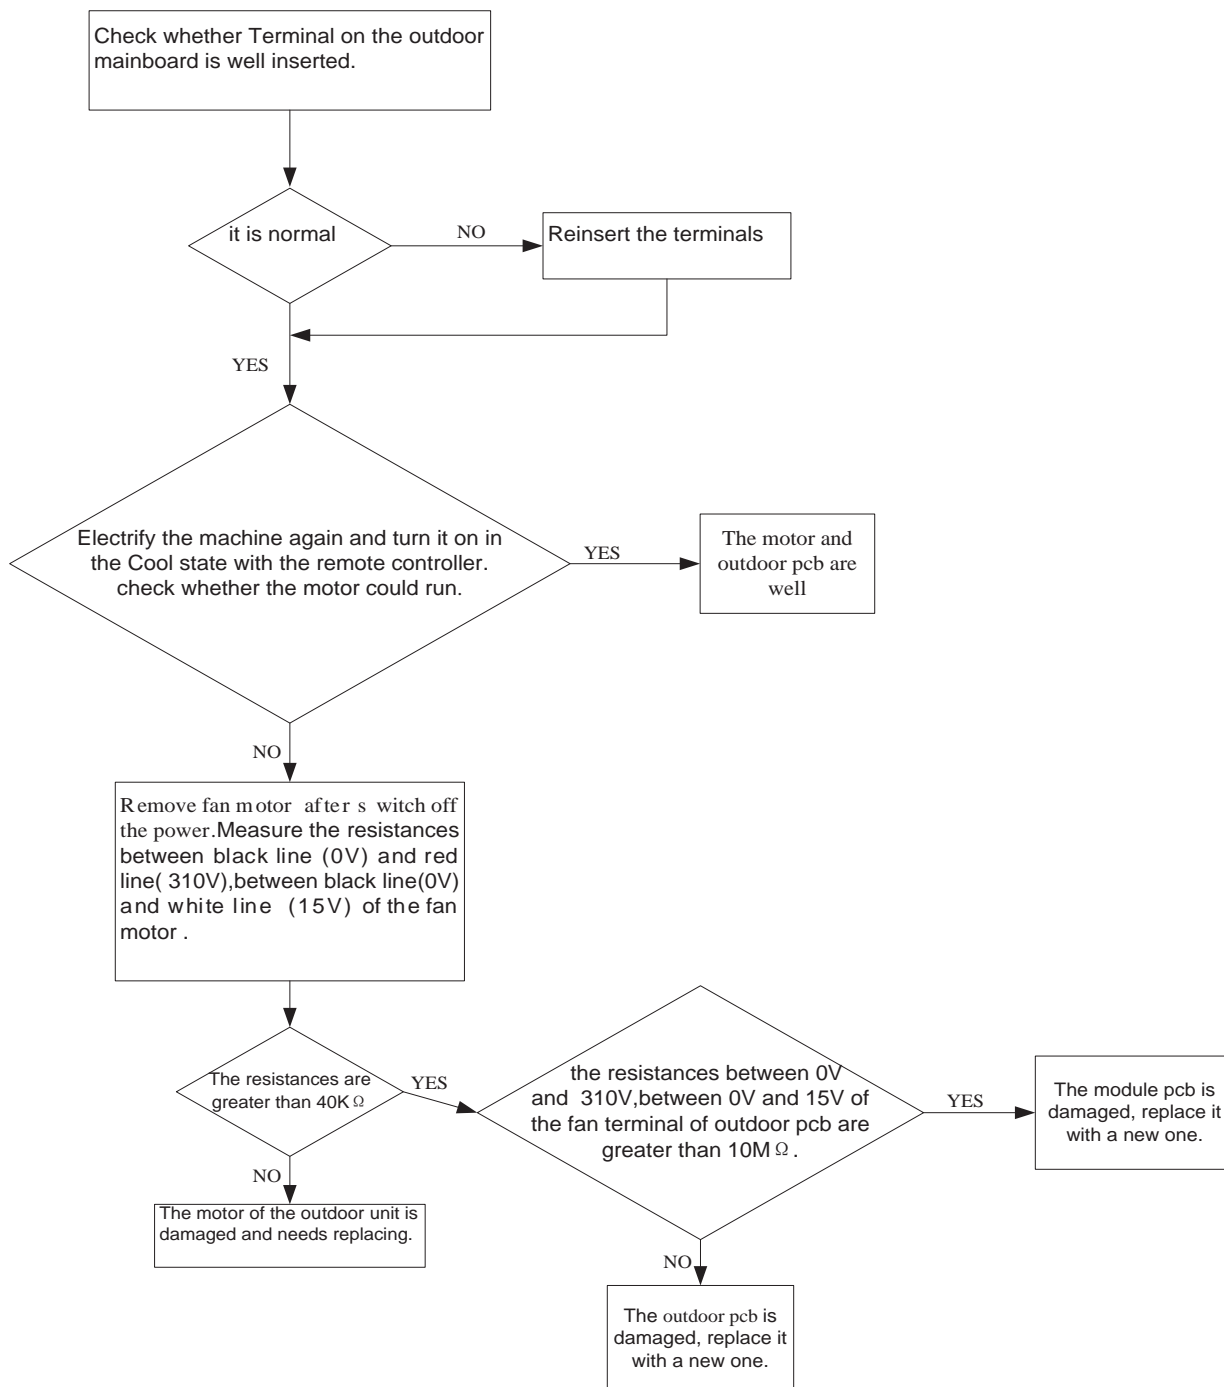

## 10.4.5 IPM protection

Outdoor display: LED1 flash 2 times

Method of malfunction detection

IPM protection is detected by checking the compressor running condition and so on

Malfunction detection conditions


- The system leads to IPM protection due to over current
- The compressor faulty leads to IPM protection
- circuit component of IPM is broken and led to IPM protection

Supposed Causes

- IPM protection dues to the compressor faulty
- IPM protection dues to faulty PCB of IPM module
- Compressor wiring disconnected

Troubleshooting

\* Caution Be sure to turn off power switch before connect or disconnect connector, or else parts damage may be occurred.

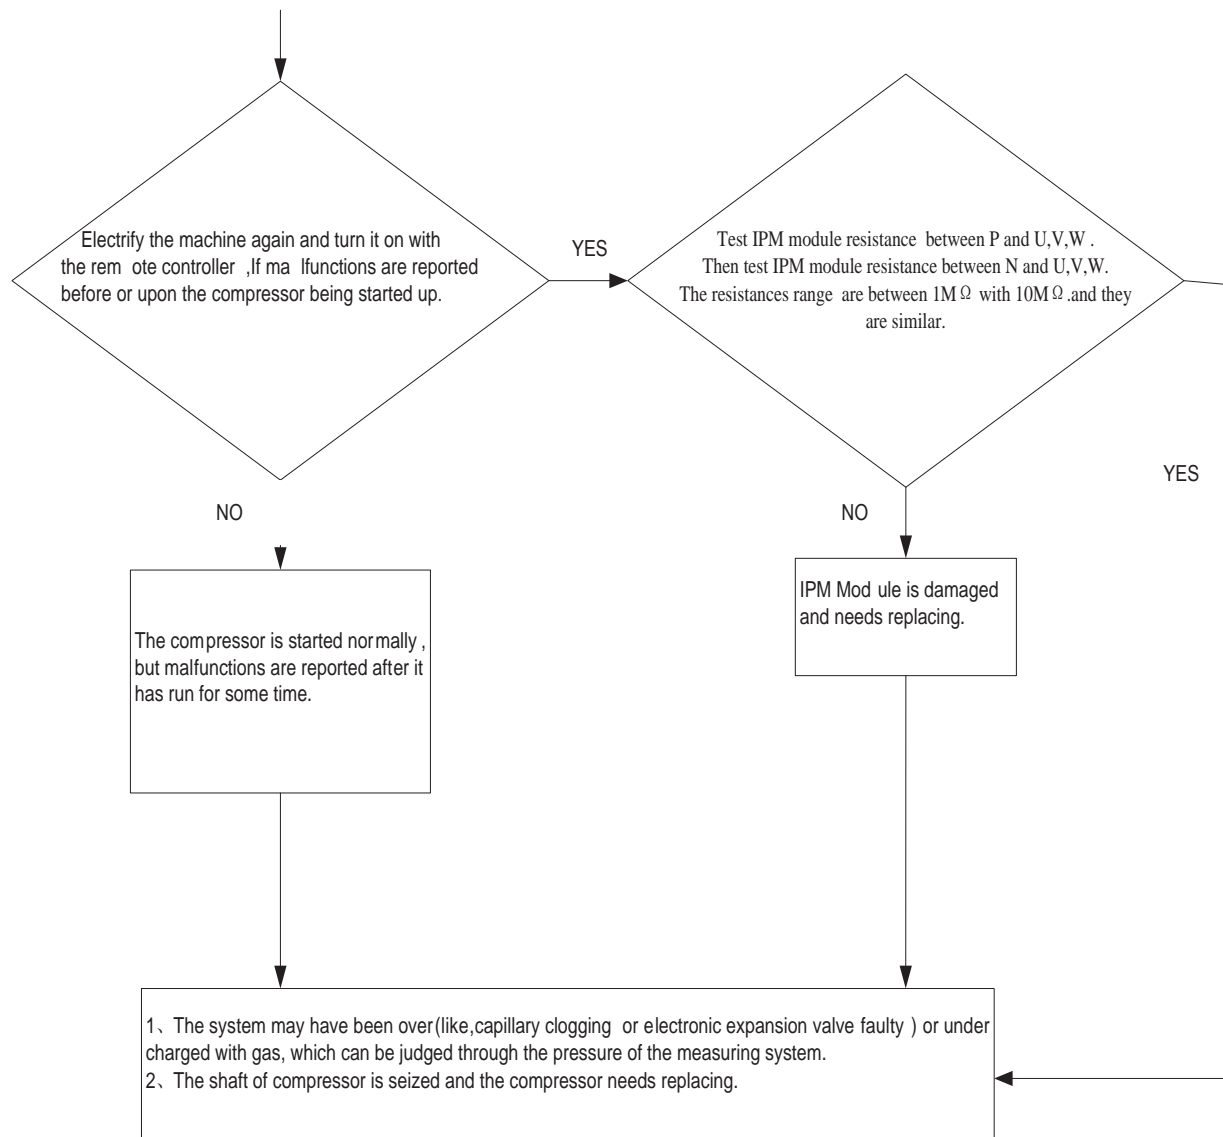



## 10.4.6 Over-current of the compressor

Outdoor Display: LED1 flash 3 or 24 or 25 times

Method of  
malfunction detection

The current of the compressor is too high

Malfunction detection  
conditions


when the IPM Module is damaged  
or the compressor is damaged.  
power supply voltage is too low or too high

Supposed  
Causes

- Faulty IPM Module
- Faulty compressor
- Faulty power supply

Troubleshooting

\* Caution Be sure to turn off power switch before connect or disconnect connector, or parts damage may be occurred.

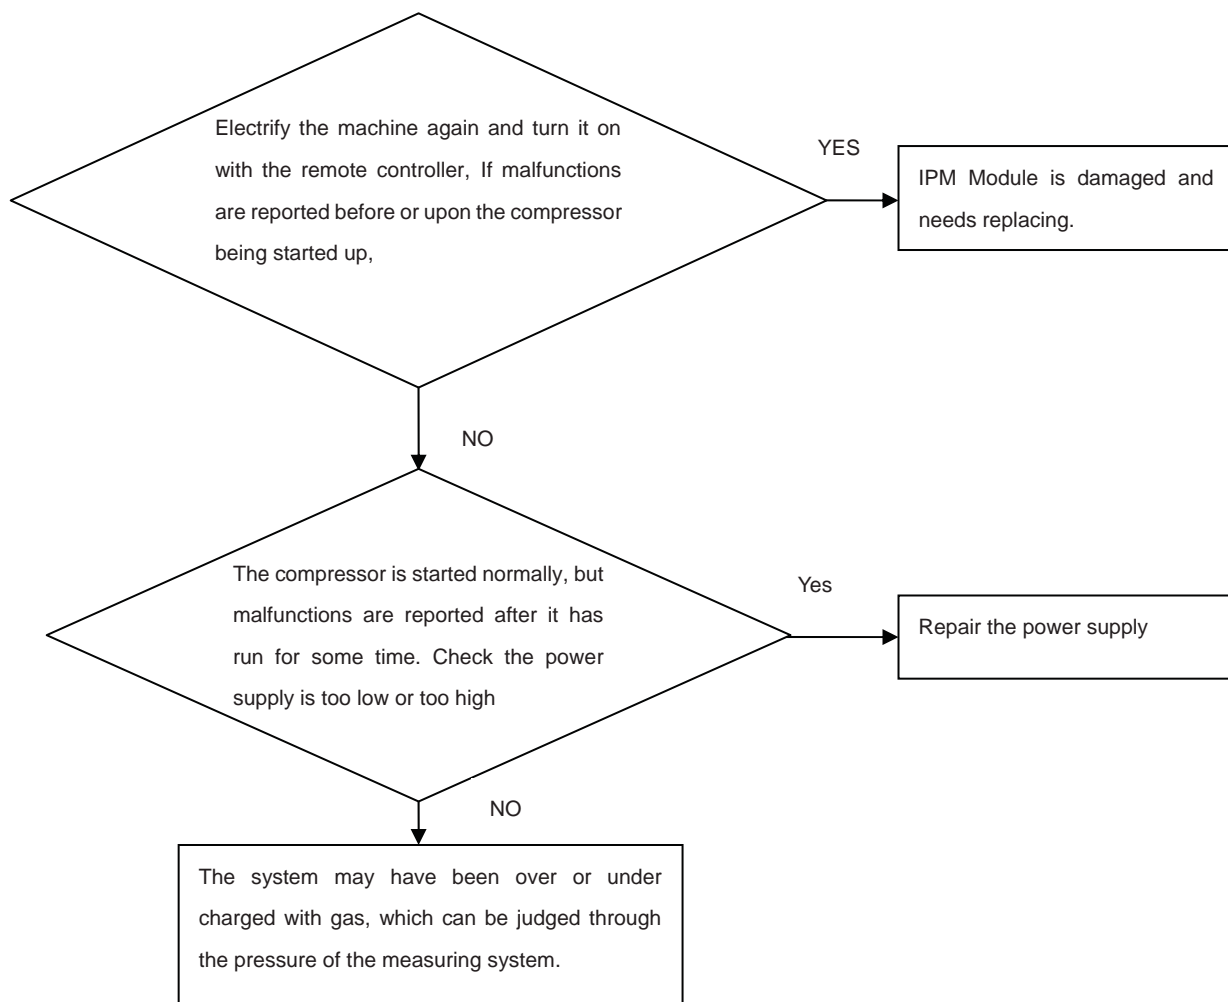

### 10.4.7 The communication fault between IPM and outdoor PCB

Outdoor display: LED1 flash 4 times

#### Method of malfunction detection

Communication is detected by checking the IPM module and the outdoor PCB

#### Malfunction detection conditions


- The outdoor PCB broken leads to communication fault
- The IPM module broken leads to communication fault

#### Supposed Causes

- The outdoor PCB is broken
- The IPM module is broken
- Communication wiring disconnected

#### Troubleshooting

\* Caution Be sure to turn off power switch before connect or disconnect connector, or else parts damage may be occurred.

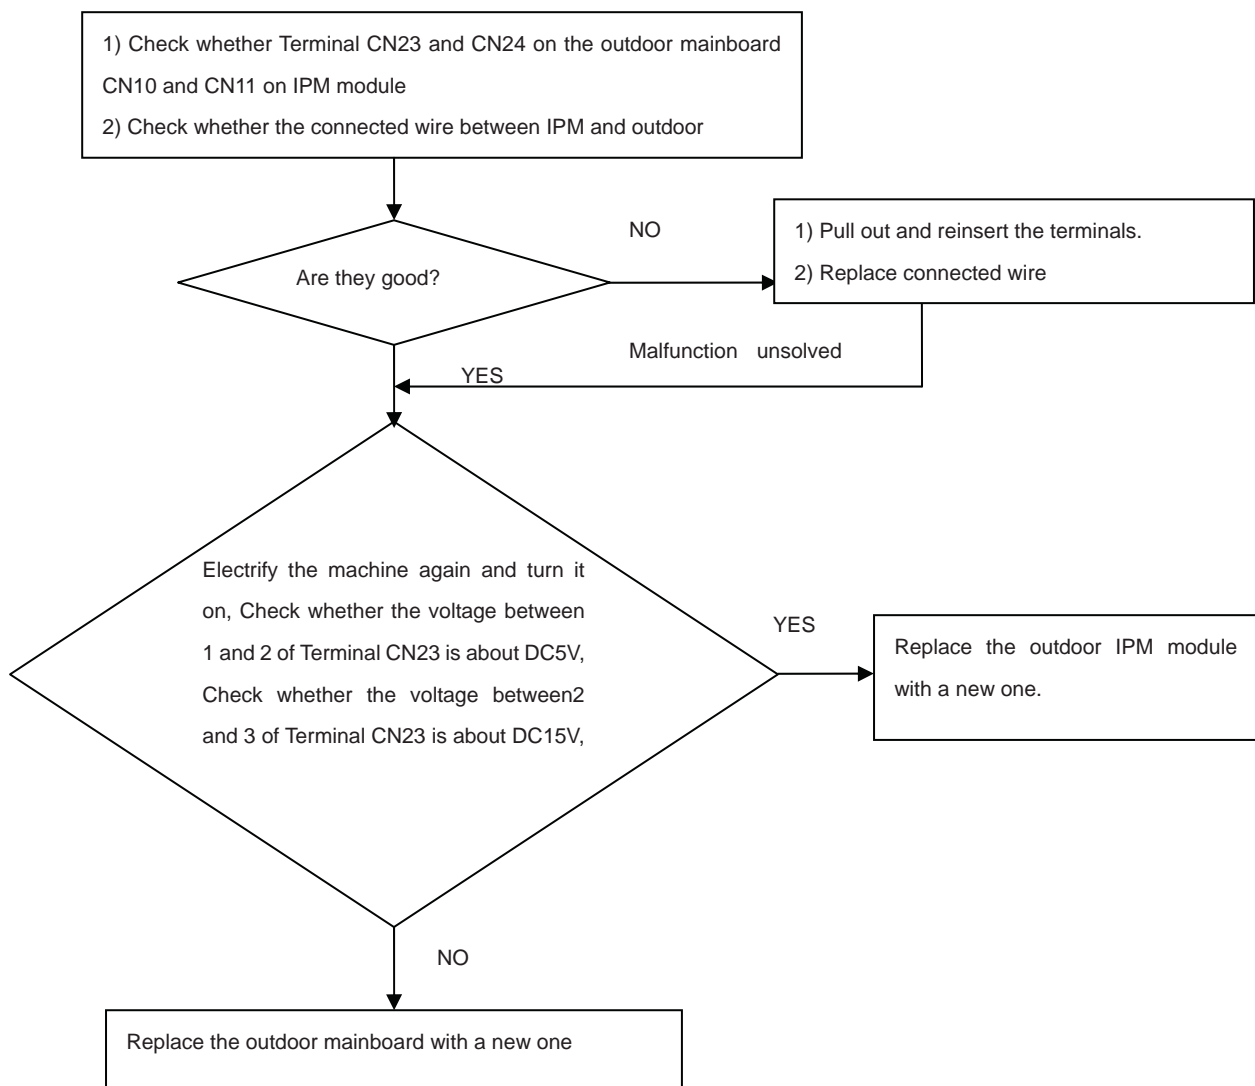

## 10.4.8 Power Supply Over or under voltage fault

Outdoor display: LED1 flash 6 times The power supply is over voltage

Method of malfunction detection

abnormal voltage rise or fall is detected by checking the specified voltage detection circuit.

Malfunction detection conditions


An voltage signal is fed from the voltage detection circuit to the microcomputer

Supposed Causes

- Supply voltage not as specified
- the IPM module is broken
- the outdoor PCB is broken

Troubleshooting

\* Caution Be sure to turn off power switch before connect or disconnect connector, or else parts damage may be occurred.

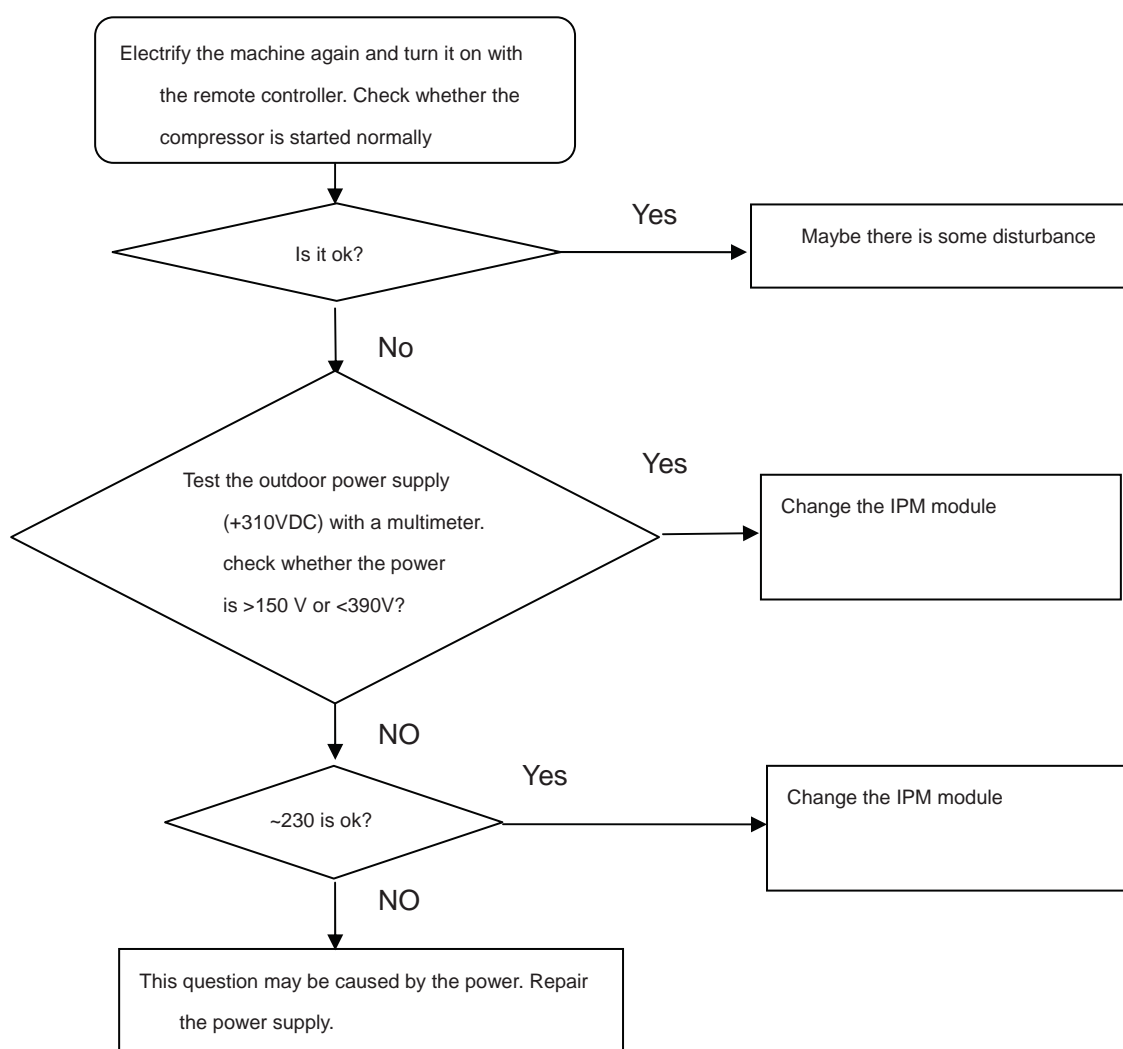

## 10.4.9 Overheat Protection For Discharge Temperature

Outdoor display: LED1 flash 8 times

Method of malfunction detection

The Discharge temperature control is checked with the temperature being detected by the Discharge pipe thermistor

Malfunction detection conditions


when the compressor discharge temperature is above 110°C

Supposed Causes

- Electronic expansion valve defective
- Faulty thermistor
- Faulty PCB

Troubleshooting

\* Caution Be sure to turn off power switch before connect or disconnect connector, or else parts damage may be occurred.

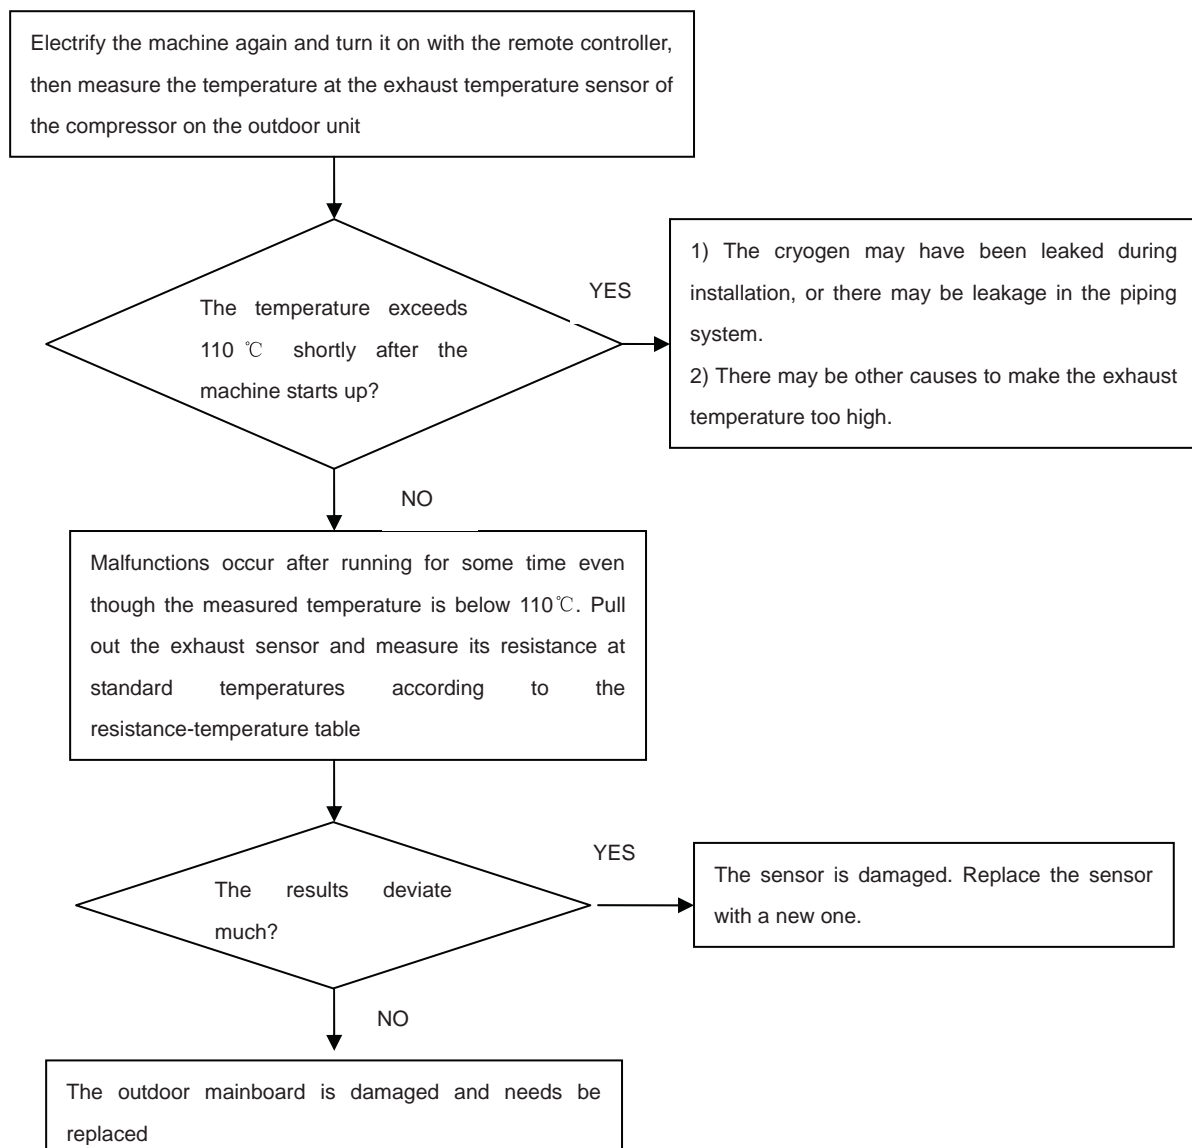

## 10.4.10 The communication fault between indoor and outdoor

Indoor display  
outdoor display

E7  
LED1 flash 15 times

Method of  
malfunction detection

Communication is detected by checking the indoor PCB and the outdoor PCB.

Malfunction detection  
conditions


- The outdoor PCB broken leads to communication fault.
- The indoor PCB broken leads to communication fault.


Supposed  
Causes

- Communication wiring disconnected.
- The indoor PCB is broken.
- The outdoor PCB is broken.
- The Module PCB is broken.

Troubleshooting

\* Caution Be sure to turn off power switch before connect or disconnect connector, or else parts damage may be occurred.

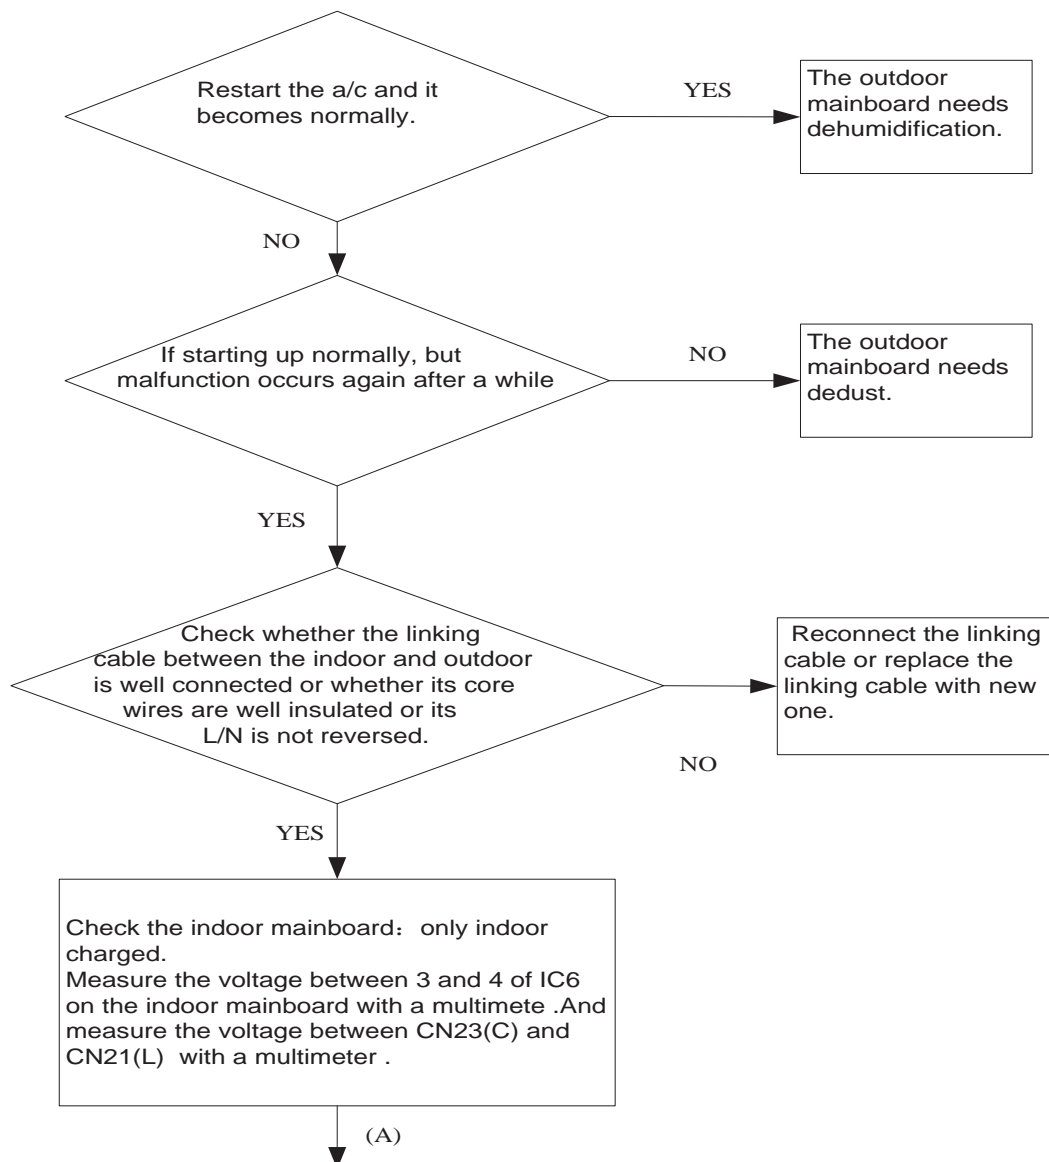

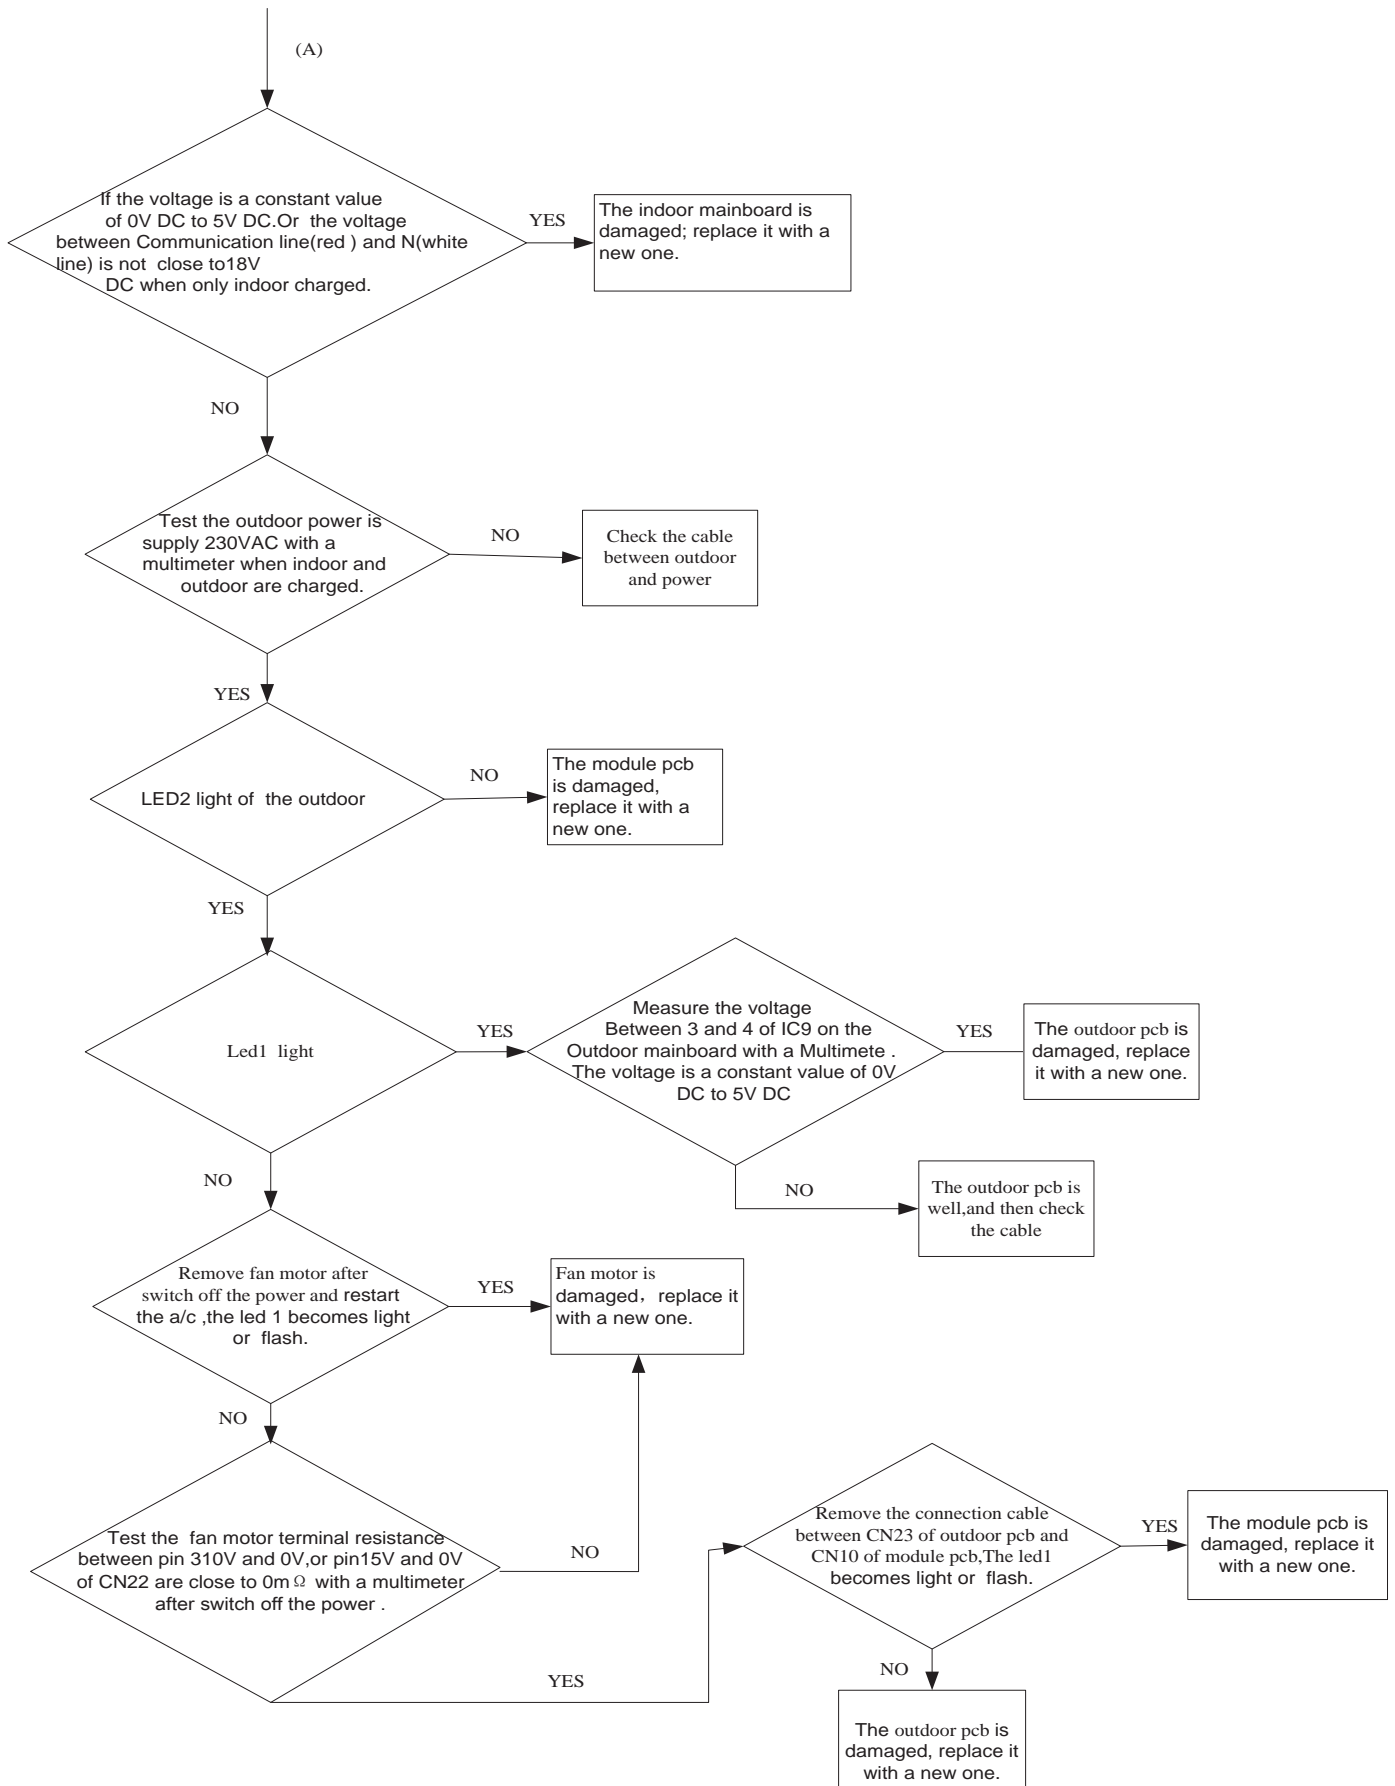

### 10.4.11 Loss of synchronism detection Inverter side current detection is abnormal

Outdoor Display    LED1    flash 18 times  
                             LED1    flash 19 times

Method of  
malfunction detection

The position of the compressor rotor can not detected normally

Malfunction detection  
conditions


when the wiring of compressor is wrong or the connection is poor;  
or the compressor is damaged

Supposed  
Causes

- Faulty    The wiring of compressor
- Faulty    compressor
- Faulty    PCB


Troubleshooting

\* Caution    Be sure to turn off power switch before connect or disconnect connector, or parts damage may be occurred.

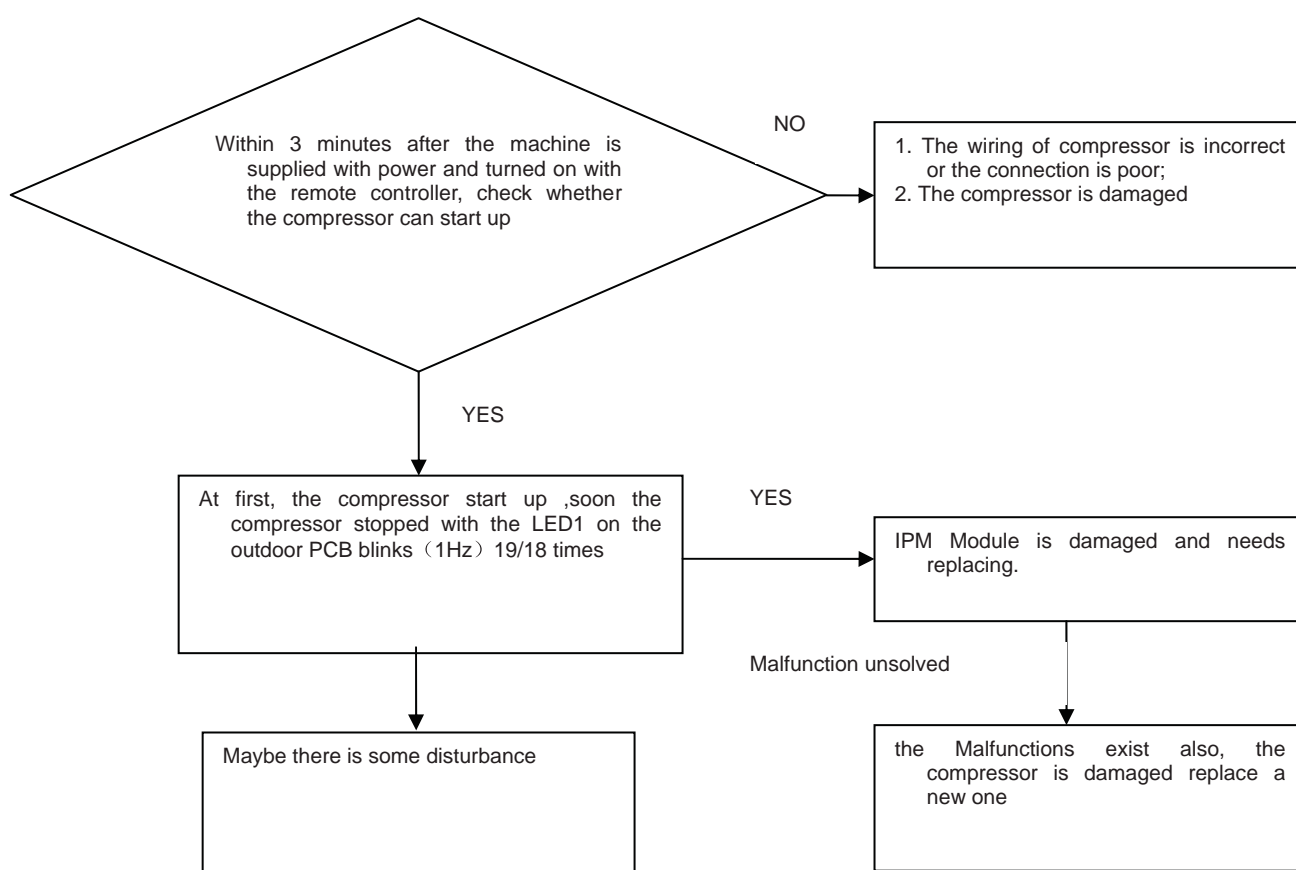

## 10.4.12 High work-intense protection

Outdoor display	LED1 flash 21 times
Method of malfunction detection	High work-intense control is activated in the heating mode if the temperature being sensed by the heat exchanger thermistor exceeds the limit.
Malfunction detection conditions	Activated when the temperature being sensed by the heat exchanger rises above 65°C twice in 30 minutes.
Supposed Causes	<ul style="list-style-type: none"> <li>■ Faulty electronic expansion valve</li> <li>■ Dirty heat exchanger</li> <li>■ Faulty heat-exchange sensor</li> <li>■ Insufficient gas</li> </ul>
Troubleshooting	<p>* Caution Be sure to turn off power switch before connect or disconnect connector, or else parts damage may be occurred.</p>

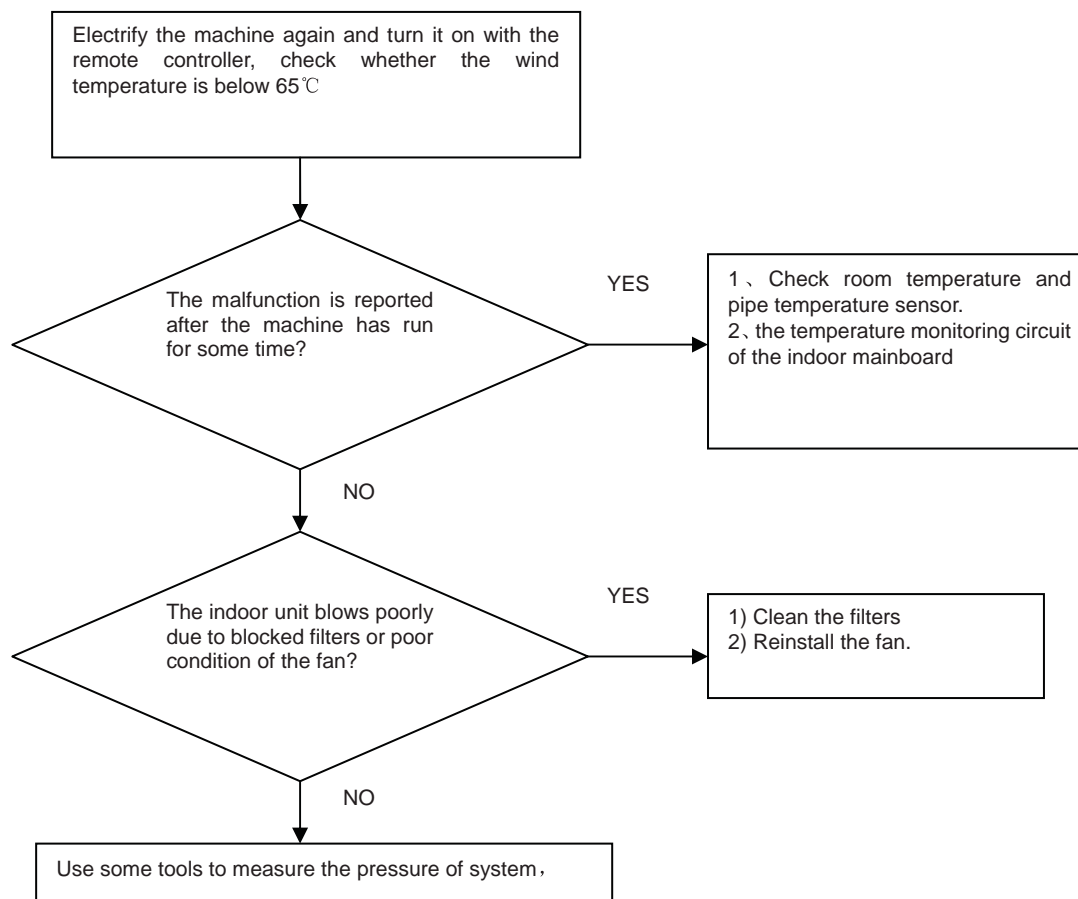




# 11 Performance Curves Diagram

## 11.1 cooling capacity-temp. curves

(9+9)performancecurves								
cooling value-temperature table								
indoor temp.	outdoor temp.(humidity 46%)							
DB/W B	18℃	20℃	25℃	32℃	35℃	40℃	43℃	46℃
18/12℃	2714	2686	4498	4030	3587	3499	3233	2400
18/14℃	2771	2743	4592	4123	3809	3587	3321	2469
20/15℃	2829	2800	4686	4217	3897	3676	3410	2537
22/16℃	2914	2886	4779	4358	3986	3764	3543	2606
25/18℃	3086	3000	4920	4639	4207	3986	3853	2880
27/19℃	3171	3057	5014	4779	4340	4119	3941	2949
30/22℃	3371	3343	5389	5154	4739	4561	4429	3326
32/23℃	3400	3371	5482	5248	4827	4606	4473	3360
32/24℃	3457	3429	5576	5342	4916	4694	4561	3429

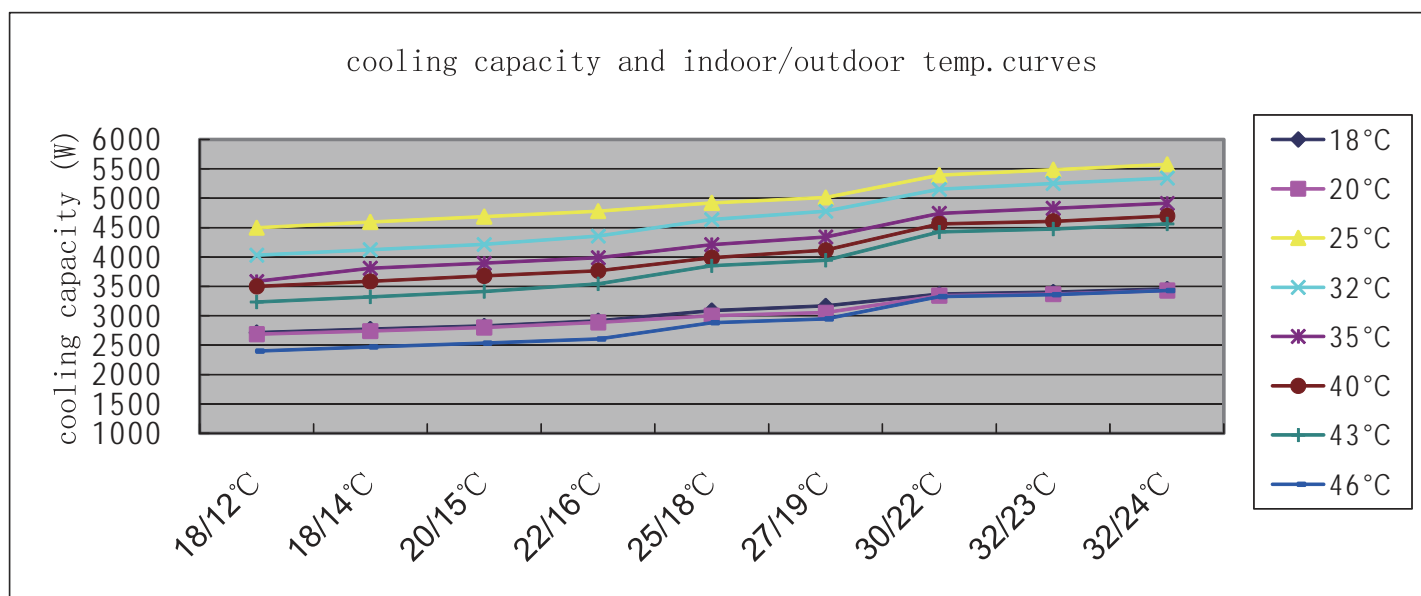


## cooling capacity-temp. curves

(9+12) performance curves


cooling value-temperature table

indoor temp.	outdoor temp.(humidity 46%)								
DB/WB	-10℃	0℃	10℃	20℃	25℃	30℃	35℃	40℃	46℃
18/12℃	2931	2867	2771	2649	3275	3567	3427	3396	3108
21/15℃	3035	3016	2967	2806	3363	3693	3659	3523	3328
24/16℃	3399	3380	3296	3054	3800	4174	4048	3915	3717
27/19℃	3597	3521	3444	3253	4018	4401	4286	4133	3865
30/22℃	3862	3793	3683	3468	4283	4599	4530	4399	4078
32/23℃	3991	3812	3815	3606	4456	4790	4637	4554	4194

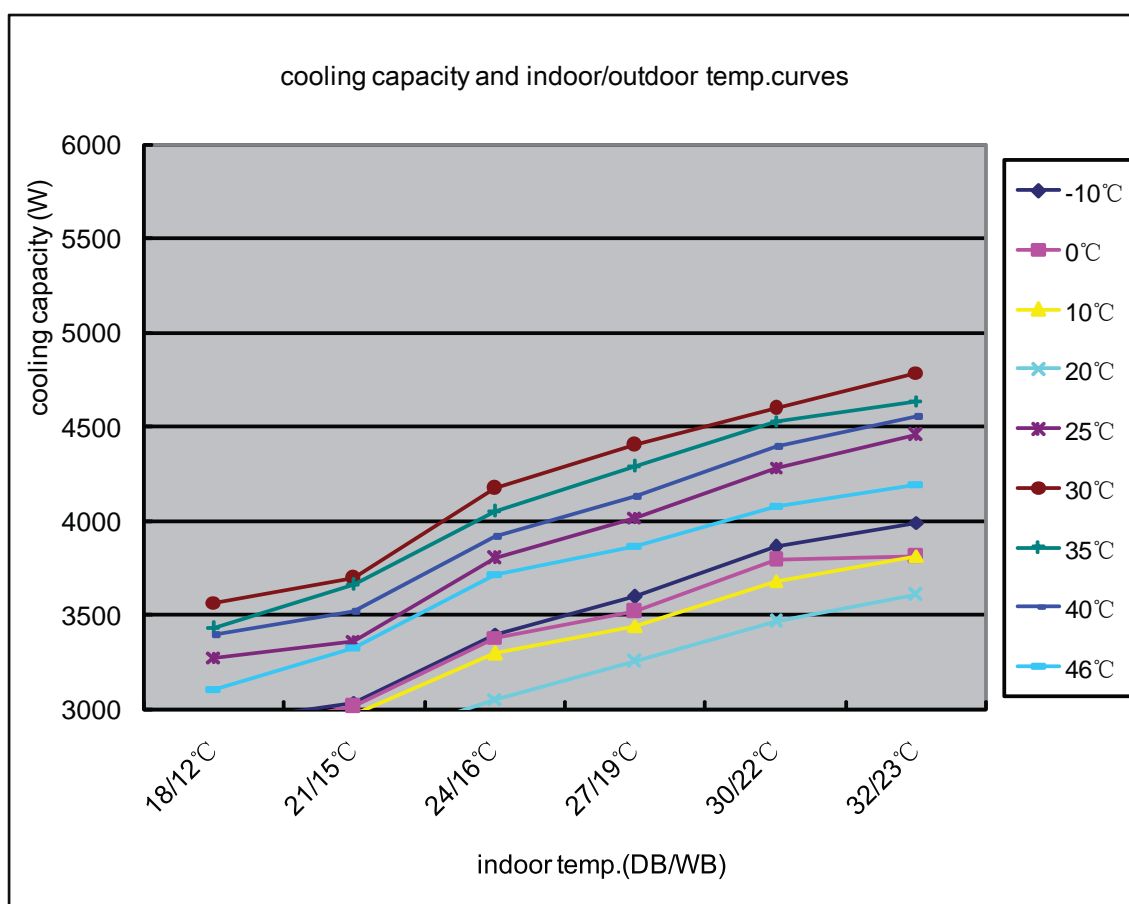


## 11.2 heating capacity-temp. curves

(9+9)performancecurves			
heating capacity and indoor/outdoor temp.table			
outdoor temp.	indoor temp.(humidity 46%)		
DB/WB	15 °C	20 °C	25 °C
-15 °C	2781	2112	2266
-5 °C	4274	3908	3604
5 °C	5561	5042	4686
7/6 °C	5319	4955	4494
15 °C	4352	4129	3514
20 °C	4002	3862	3214
25 °C	4128	3996	3309

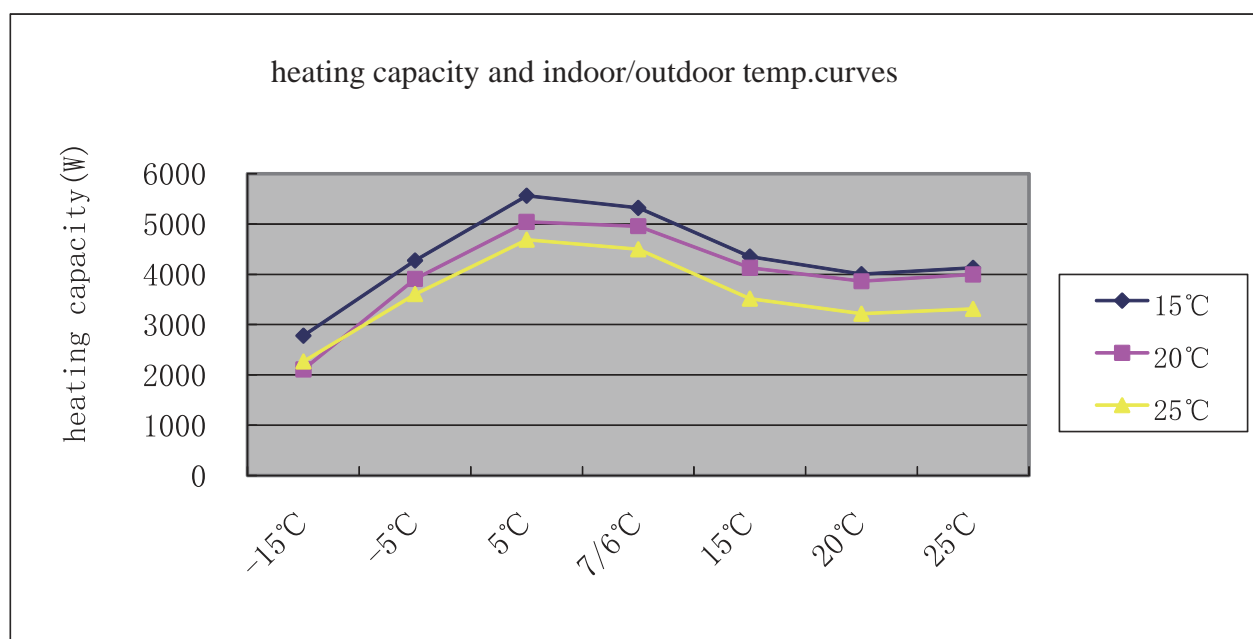


## heating capacity-temp.curves

(9+12)performancecurves			
heating capacity and indoor/outdoor temp.table			
outdoor temp.	indoor temp.(humidity 46%)		
DB/WB	15 °C	20 °C	25 °C
-15 °C	3704	2736	2640
-5 °C	5692	5187	4801
5 °C	7407	6693	6241
7/6 °C	6570	6120	5550
15 °C	5017	4860	4051
20 °C	4569	4522	3670
25 °C	4713	4678	3778

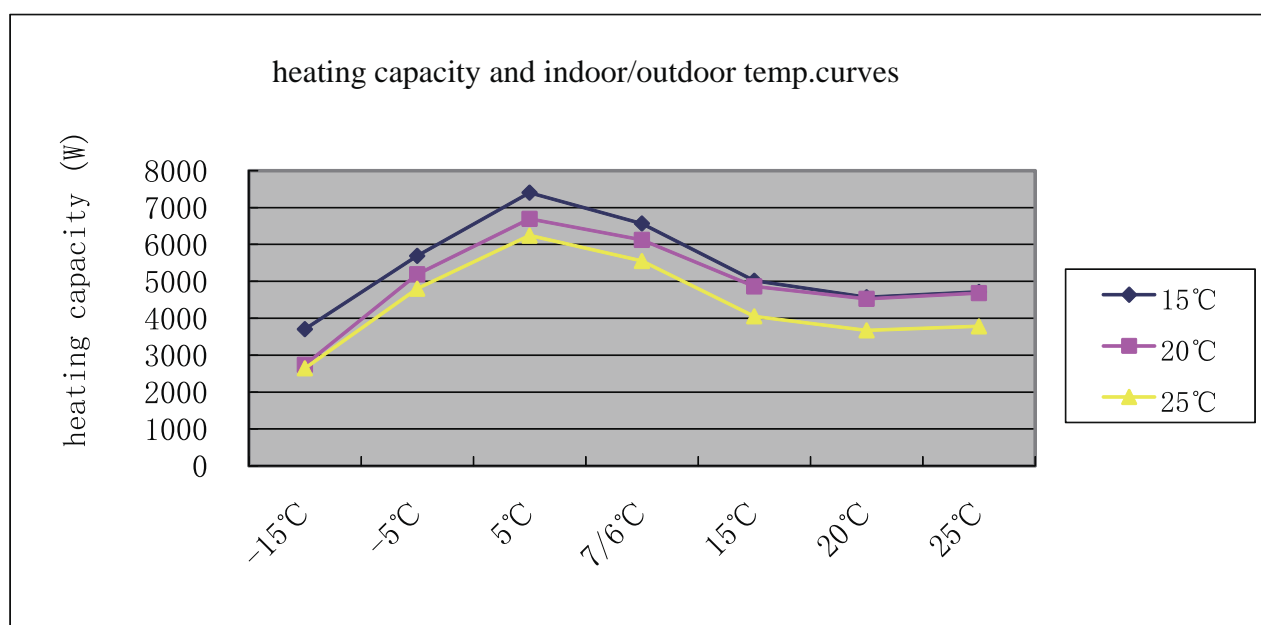


## 11.3 Cooling power consumption-temp. curves

(9+9)performancecurves								
power consumption value-temp.table								
indoor temp.	outdoor temp.(humidity 46%)							
DB/WB	18℃	20℃	25℃	32℃	35℃	40℃	43℃	46℃
18/12℃	465	468	1235	1287	1323	1412	1331	679
18/14℃	474	481	1257	1309	1345	1441	1478	694
20/15℃	484	496	1279	1331	1367	1463	1514	708
22/16℃	493	502	1309	1353	1389	1478	1544	781
25/18℃	508	514	1279	1382	1434	1514	1588	810
27/19℃	533	524	1309	1412	1456	1529	1617	817
30/22℃	539	545	1360	1470	1522	1632	1706	875
32/23℃	548	536	1375	1514	1544	1662	1728	976
32/24℃	558	527	1397	1544	1566	1691	1750	1048

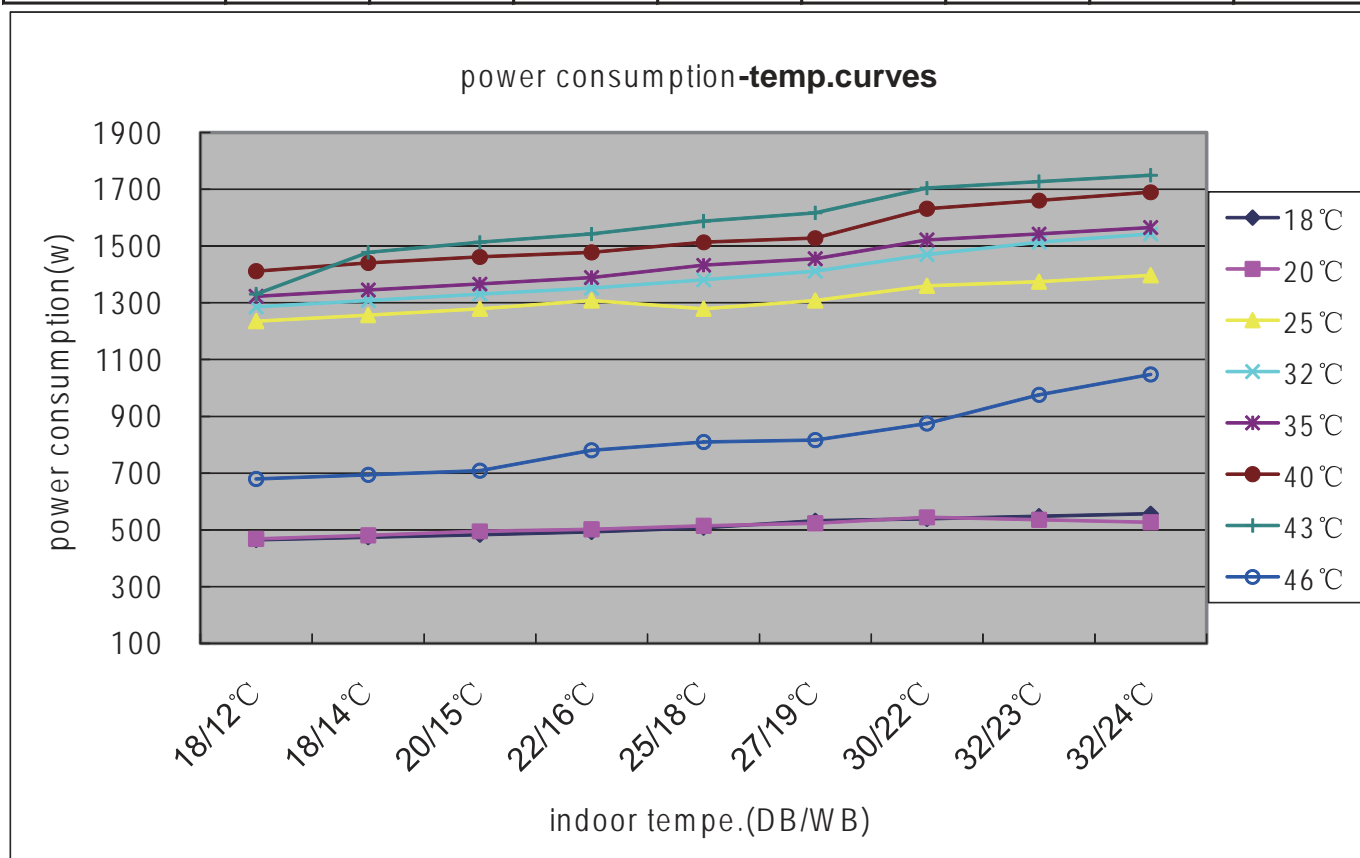


## Cooling power consumption-temp.curves

(9+12)performancecurves								
power consumption value-temp.table								
indoor temp.	outdoor temp.(humidity 46%)							
DB/WB	18 °C	20 °C	25 °C	32 °C	35 °C	40 °C	43 °C	46 °C
18/12 °C	468	471	914	952	1494	1594	1502	583
18/14 °C	477	484	930	968	1519	1627	1668	595
20/15 °C	487	499	947	985	1544	1652	1710	608
22/16 °C	496	505	968	1001	1569	1668	1743	670
25/18 °C	512	518	947	1023	1619	1710	1793	694
27/19 °C	536	527	968	1044	1643	1726	1826	701
30/22 °C	543	549	1006	1088	1718	1843	1926	750
32/23 °C	552	539	1017	1121	1743	1876	1951	837
32/24 °C	561	530	1034	1142	1768	1909	1975	899

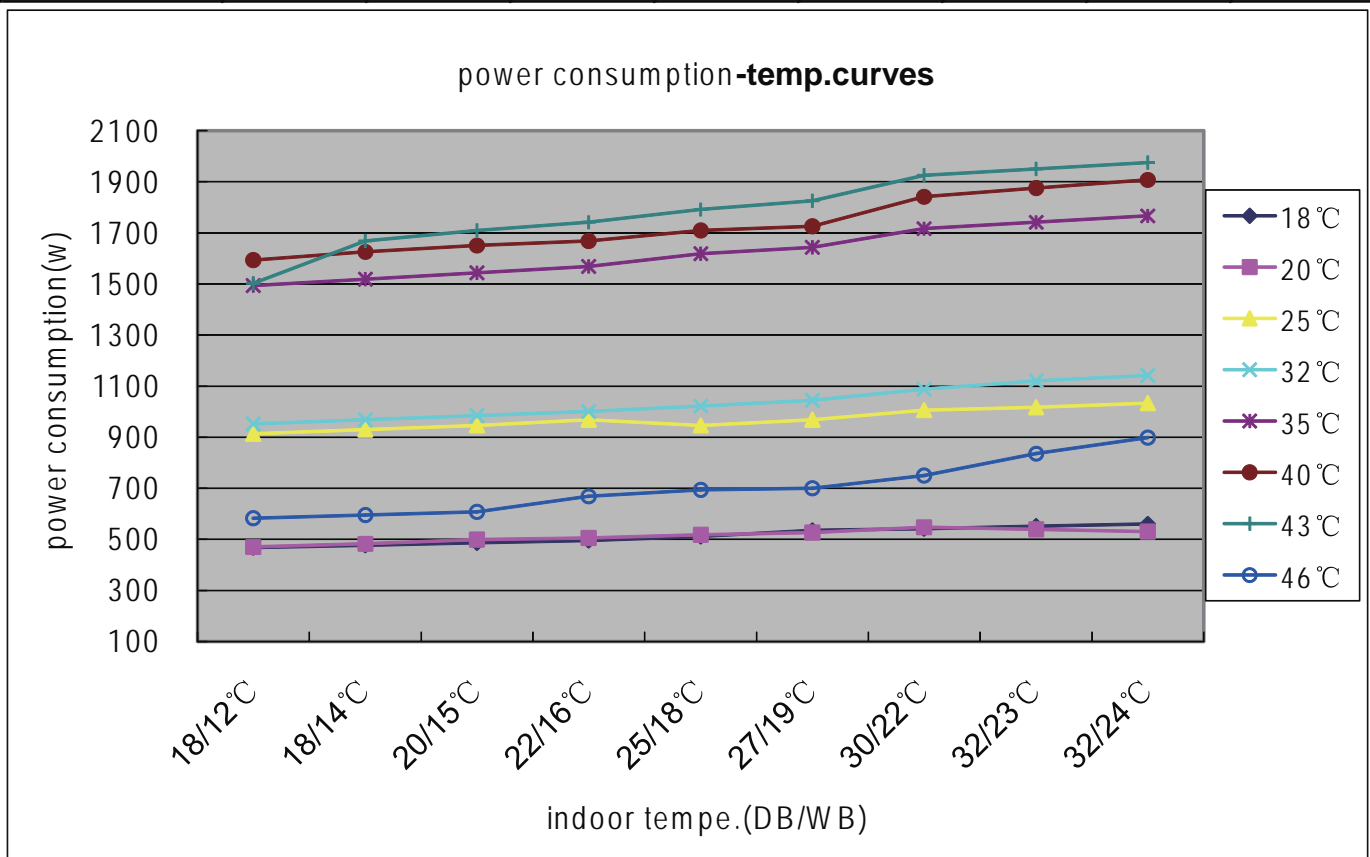


## 11.4 heating power consumption-temp. curves

(9+9)performancecurves			
power consumption value-temp.table			
outdoor temp.	indoor temp.(humidity 46%)		
DB/W B	15 °C	20 °C	25 °C
-15 °C	941	1013	1108
-5 °C	1129	1115	1346
5 °C	1274	1448	1535
7/6 °C	1168	1286	1404
15 °C	671	735	799
20 °C	494	515	559
25 °C	497	520	562

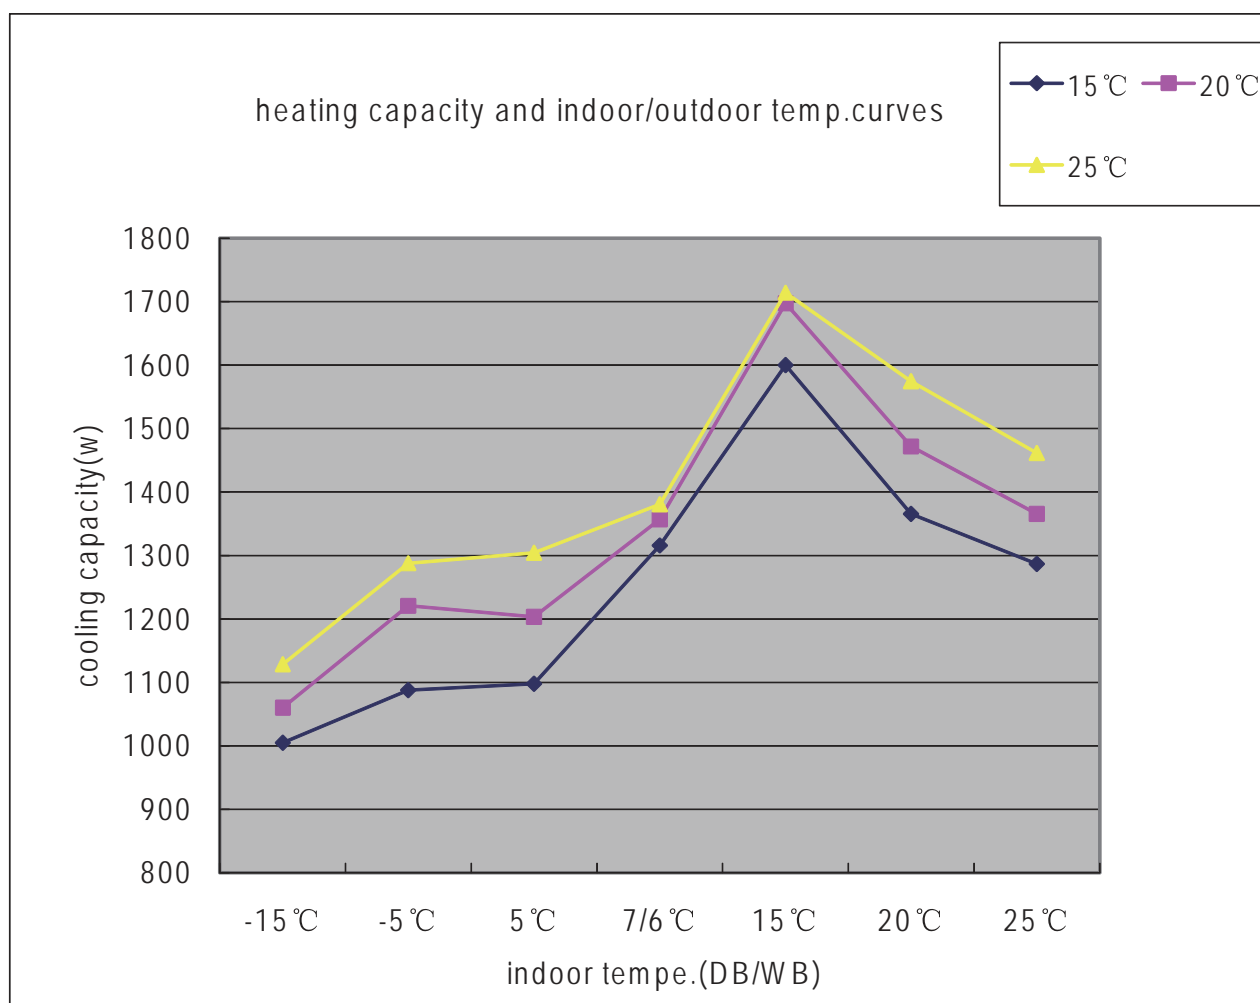

## heating power consumption-temp.curves


(9+12)performancecurves			
power consumption value-temp.table			
outdoor temp.	indoor temp.(humidity 46%)		
DB/WB	15 °C	20 °C	25 °C
-15 °C	941	1013	1108
-5 °C	1129	1115	1346
5 °C	1274	1448	1535
7/6 °C	1168	1286	1404
15 °C	671	735	799
20 °C	494	515	559
25 °C	497	520	562

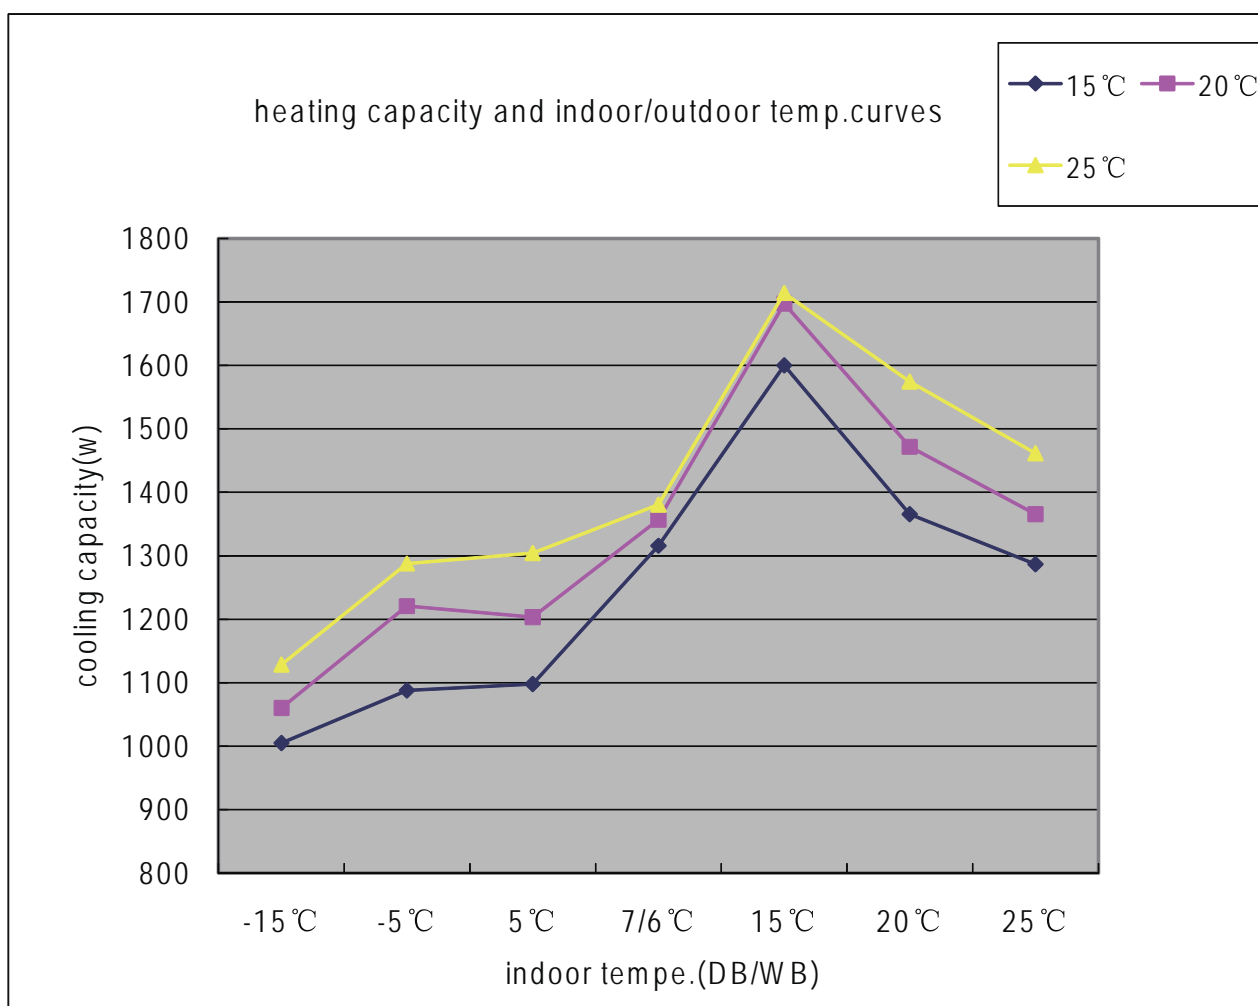




## 11.5 Cooling discharge pressure

(9+9)performancecurves			
cooling discharge pressure.table			
outdoor temp. (humidity 46%)	indoor temp.		
DB/WB	16 °C	19 °C	22 °C
15 °C	2465	2550	2635
25 °C	3298	3332	3400
30 °C	3298	3366	3400
35 °C	3332	3400	3502
40 °C	3366	3536	3536
45 °C	2600	2600	2700

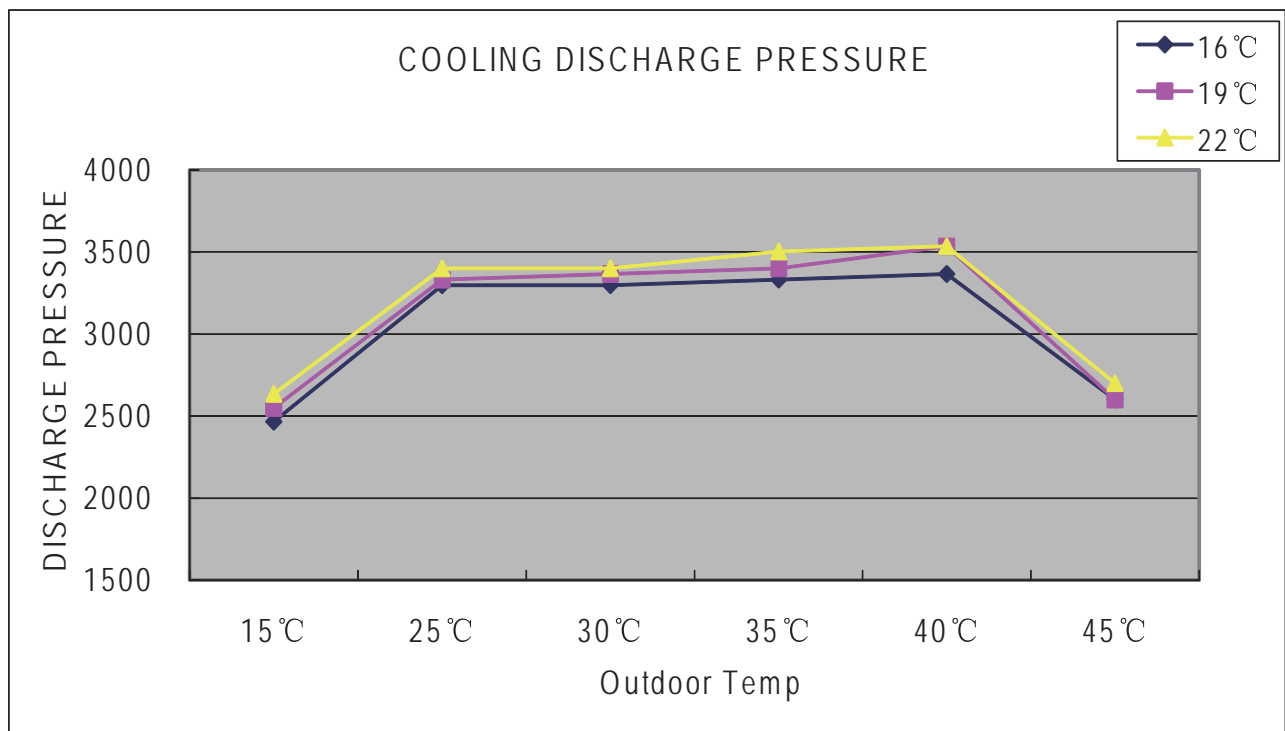


## Cooling discharge pressure

(9+12)performancecurves			
cooling discharge pressure.table			
outdoor temp. (humidity 46%)	indoor temp.		
DB/W B	16 °C	19 °C	22 °C
15 °C	2465	2550	2635
25 °C	3298	3332	3400
30 °C	3298	3366	3400
35 °C	3332	3400	3502
40 °C	3366	3536	3536
45 °C	2600	2600	2700

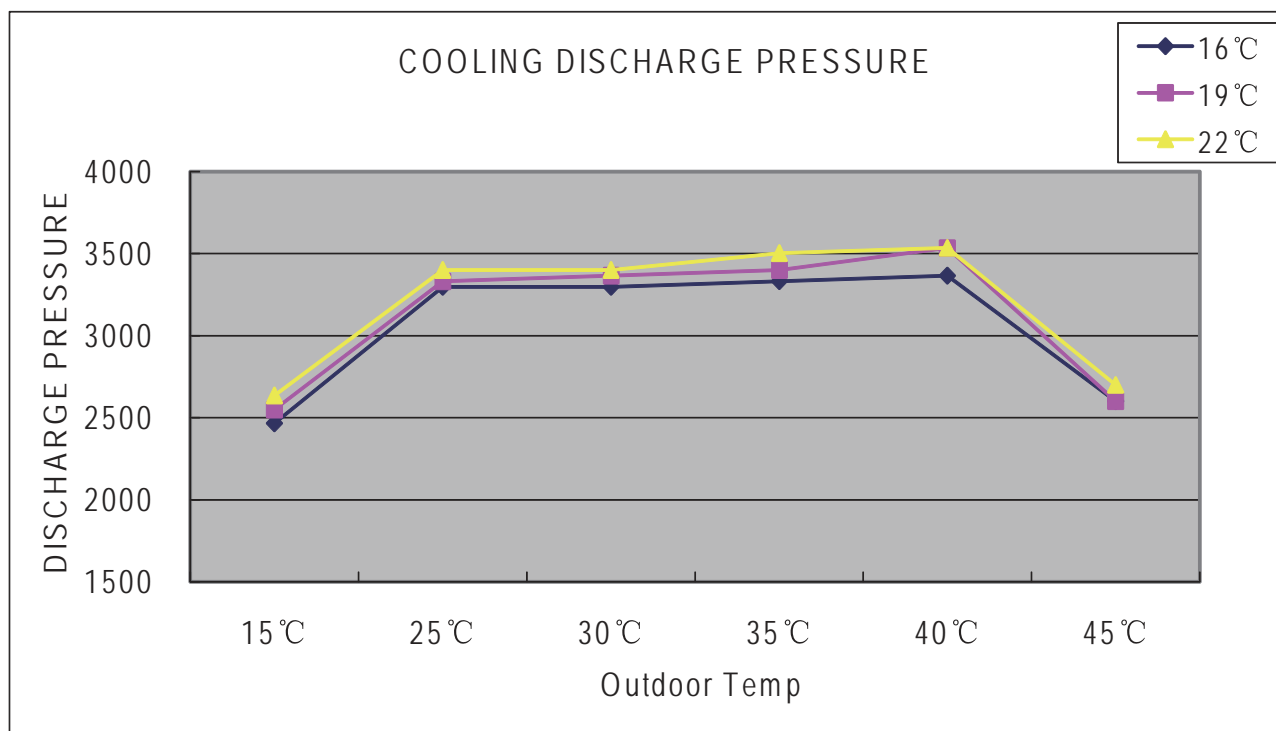


## 11.6 cooling suction pressure curves

(9+9)performancecurves			
cooling suction pressure.table			
outdoor temp. (humidity 46%)	indoor temp.		
DB/WB	16 °C	19 °C	22 °C
15 °C	643	665	687
25 °C	860	869	886
30 °C	860	878	886
35 °C	869	886	913
40 °C	878	922	922
45 °C	678	678	704

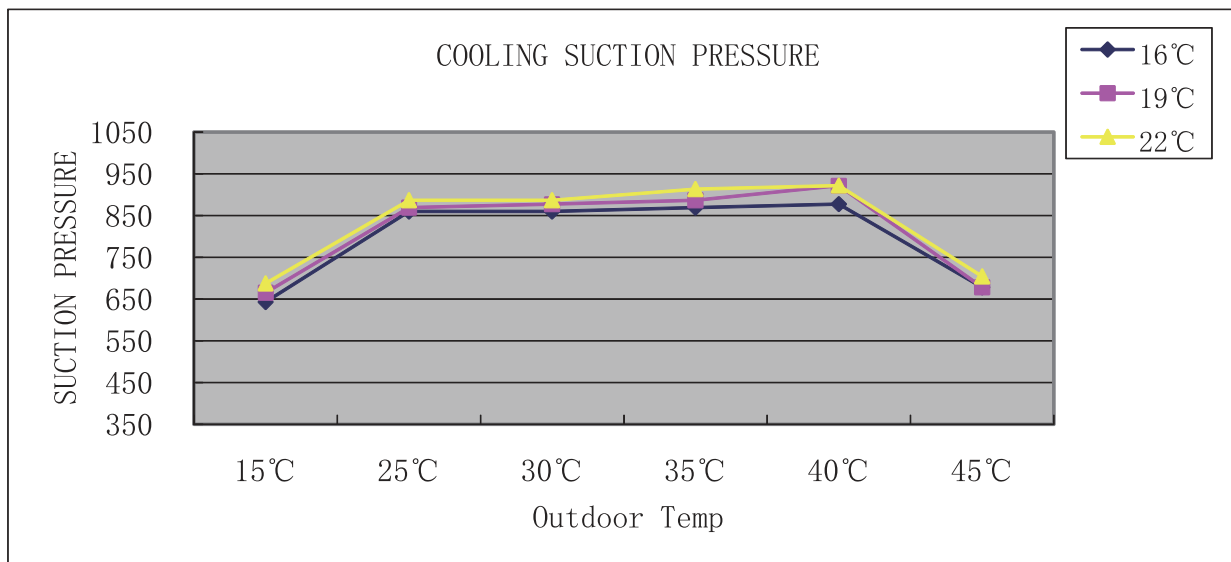


## cooling suction pressure curves

performancecurves			
cooling suction pressure.table			
outdoor temp. (humidity 46%)	indoor temp.		
DB/W B	16 °C	19 °C	22 °C
15 °C	643	665	687
25 °C	860	869	886
30 °C	860	878	886
35 °C	869	886	913
40 °C	878	922	922
45 °C	678	678	704

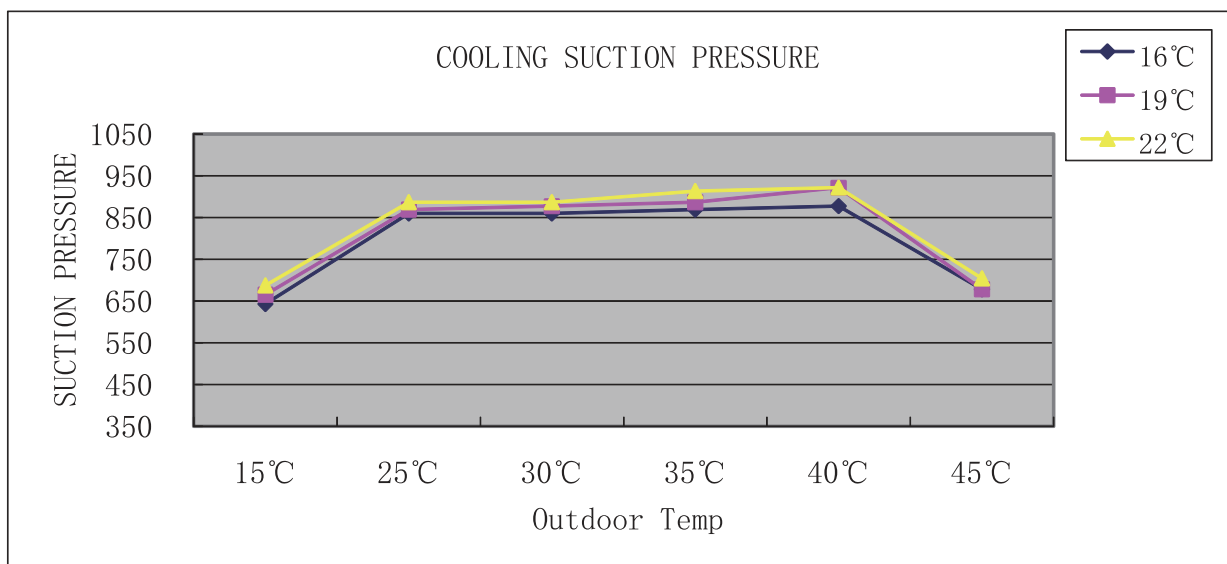


## 11.7 heating discharge pressure curves

(9+9)performancecurves			
Heating discharge pressure.table			
outdoor temp. (humidity 46%)	indoor temp.		
DB/WB	15℃	20℃	25℃
−15℃	2941	3069	3165
−10℃	3005	3101	3197
−5℃	3053	3133	3229
0℃	3101	3165	3261
5℃	3165	3197	3293
10℃	3062	3154	3200
15℃	2567	2644	2669
20℃	2459	2507	2531

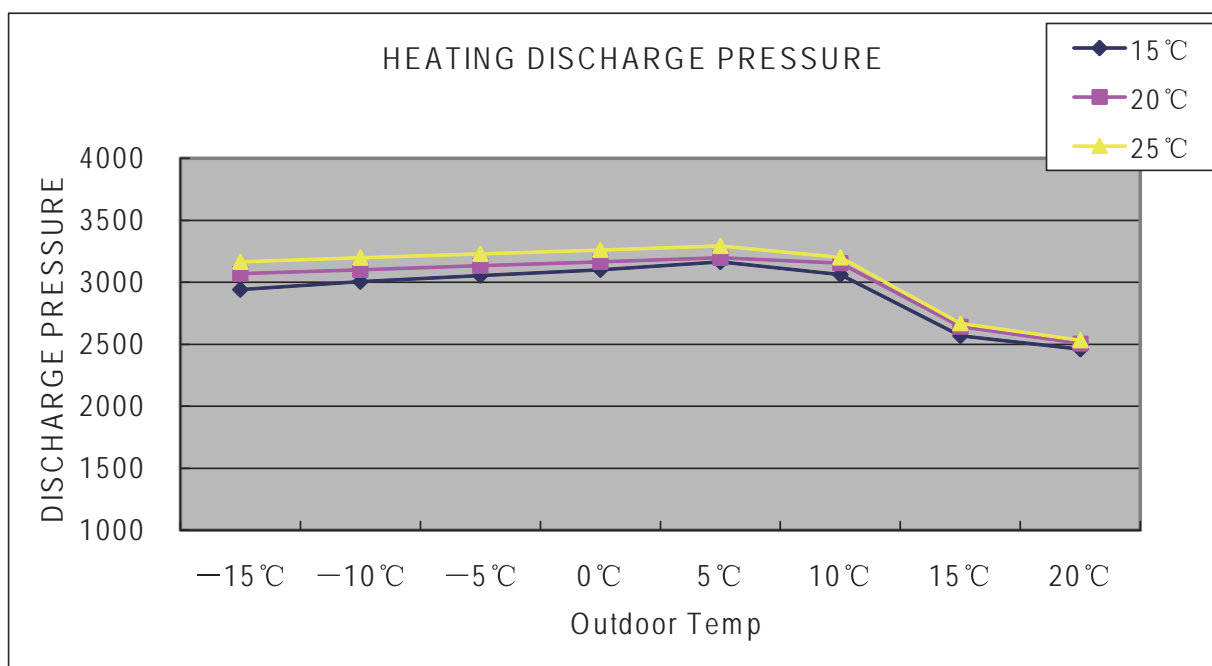


## heating discharge pressure curves

(9+12)performancecurves			
Heating discharge pressure.table			
outdoor temp. (humidity 46%)	indoor temp.		
DB/WB	15 °C	20 °C	25 °C
-15 °C	2941	3069	3165
-10 °C	3005	3101	3197
-5 °C	3053	3133	3229
0 °C	3101	3165	3261
5 °C	3165	3197	3293
10 °C	3062	3154	3200
15 °C	2567	2644	2669
20 °C	2459	2507	2531

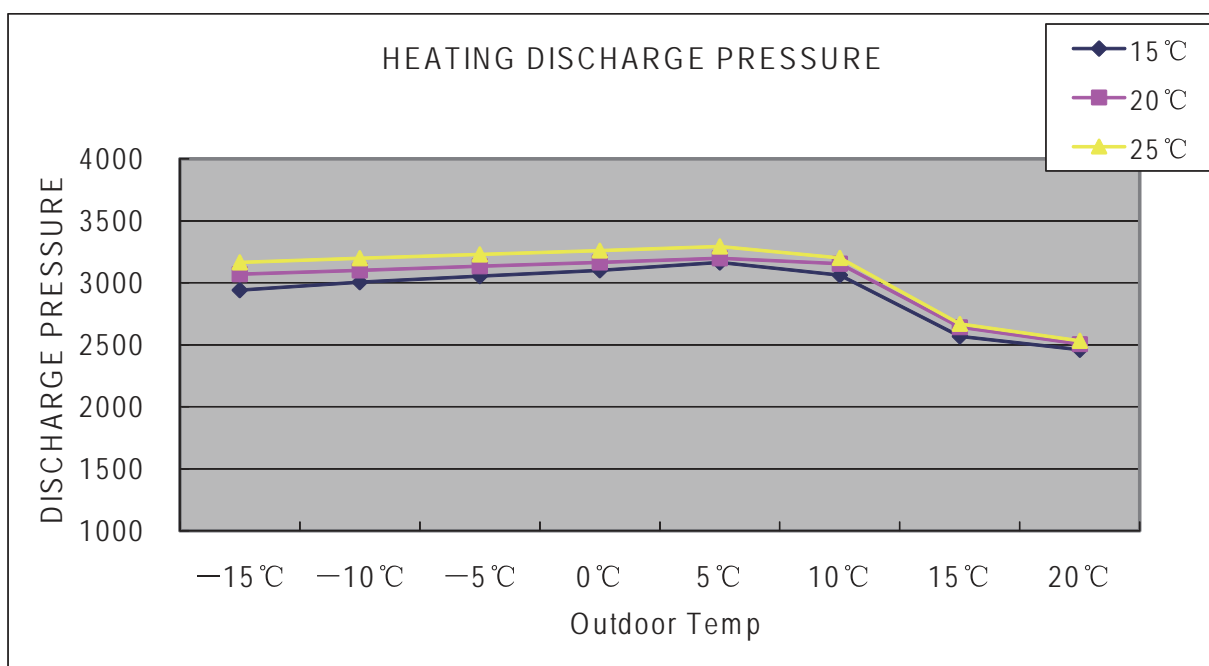


## 11.8 heating suction pressure curves

(9+9)performancecurves			
heating discharge pressure.table			
outdoor temp. (humidity 46%)	indoor temp.		
DB/W B	15 °C	20 °C	25 °C
−15 °C	722	754	777
−10 °C	738	762	785
−5 °C	750	769	793
0 °C	762	777	801
5 °C	777	785	809
10 °C	752	775	786
15 °C	631	649	656
20 °C	604	616	622

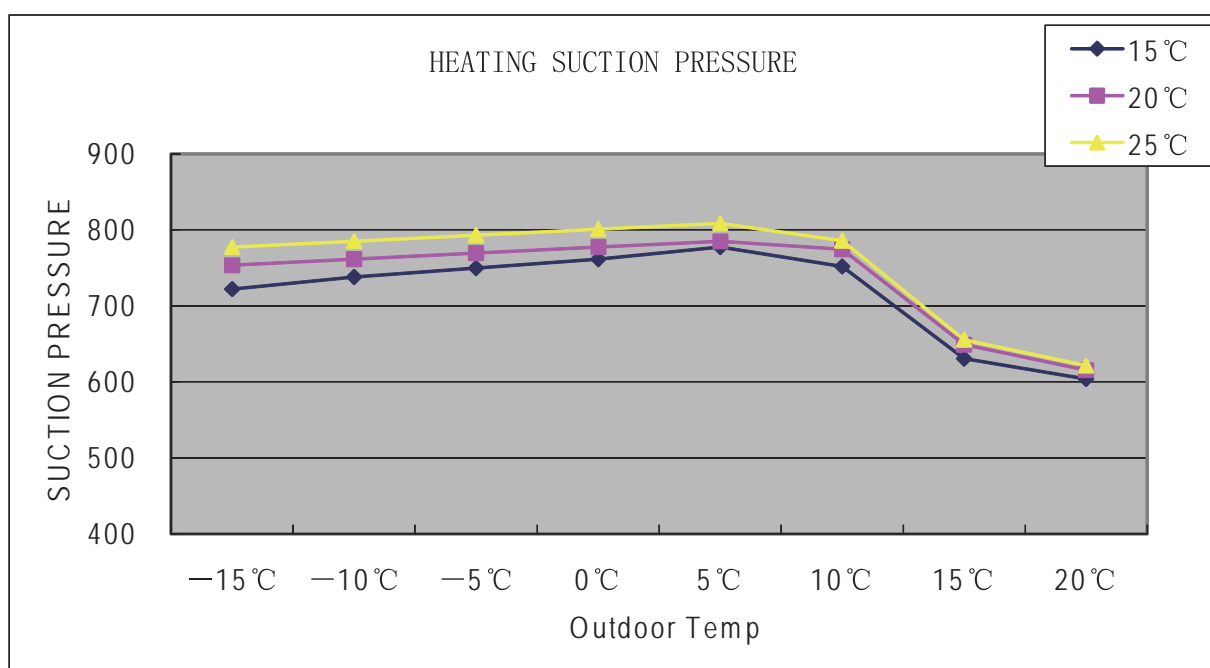

## heating suction pressure curves


(9+12)performancecurves			
heating discharge pressure.table			
outdoor temp. (humidity 46%)	indoor temp.		
DB/WB	15 °C	20 °C	25 °C
−15 °C	722	754	777
−10 °C	738	762	785
−5 °C	750	769	793
0 °C	762	777	801
5 °C	777	785	809
10 °C	752	775	786
15 °C	631	649	656
20 °C	604	616	622

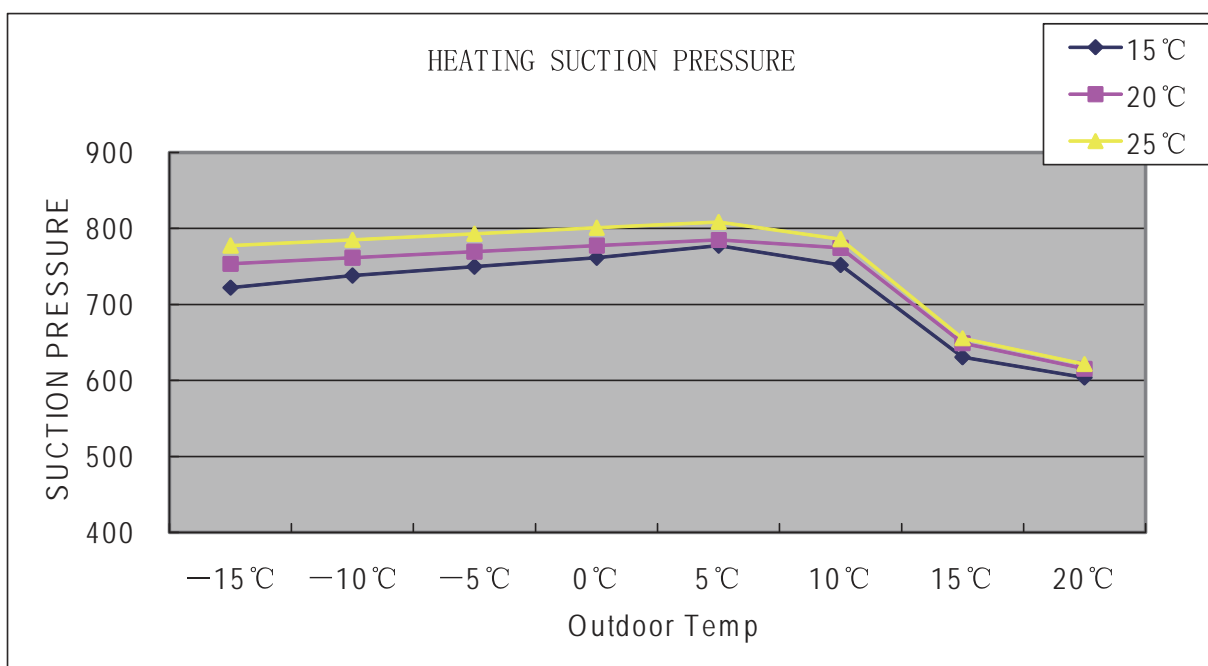




## 12 Circuit diagrams

### 12.1 Outdoor unit control board Circuit Diagrams

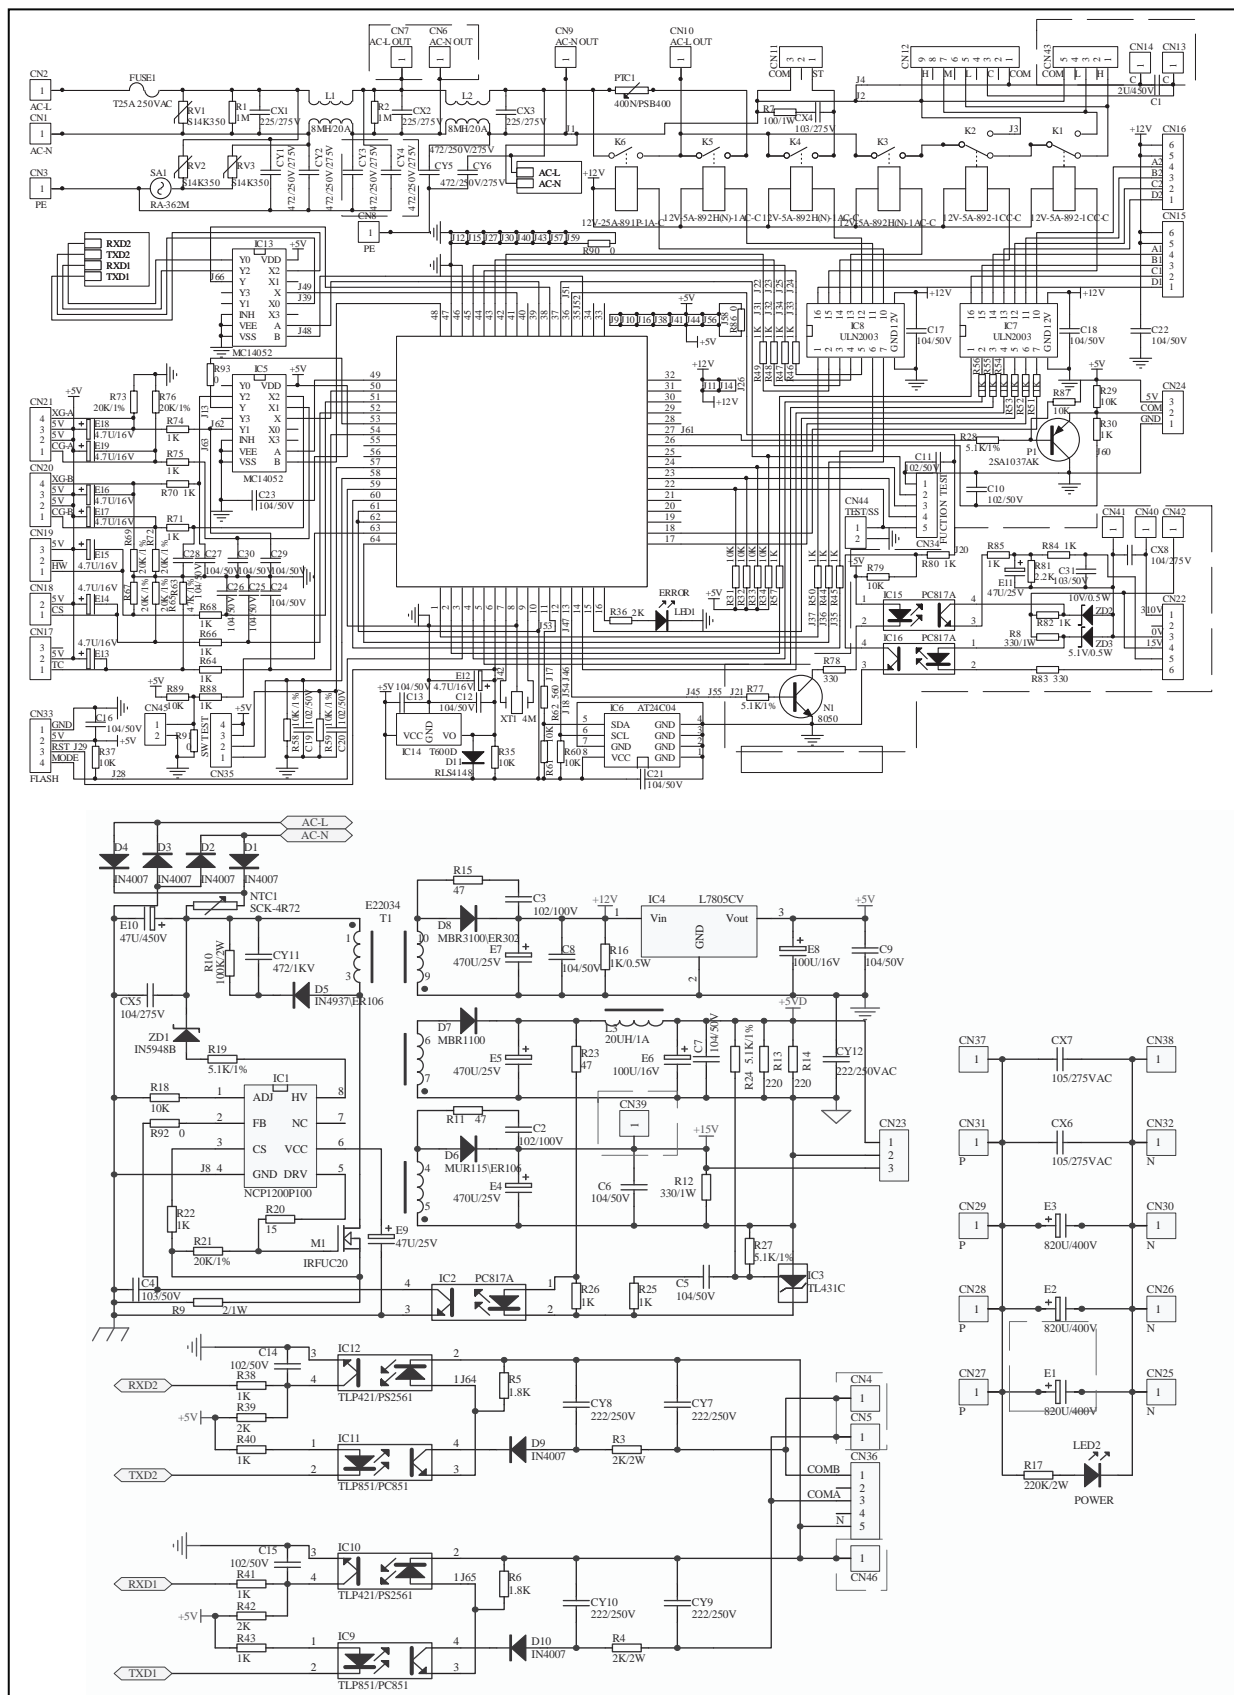

## 12.2 Module board Circuit Diagram

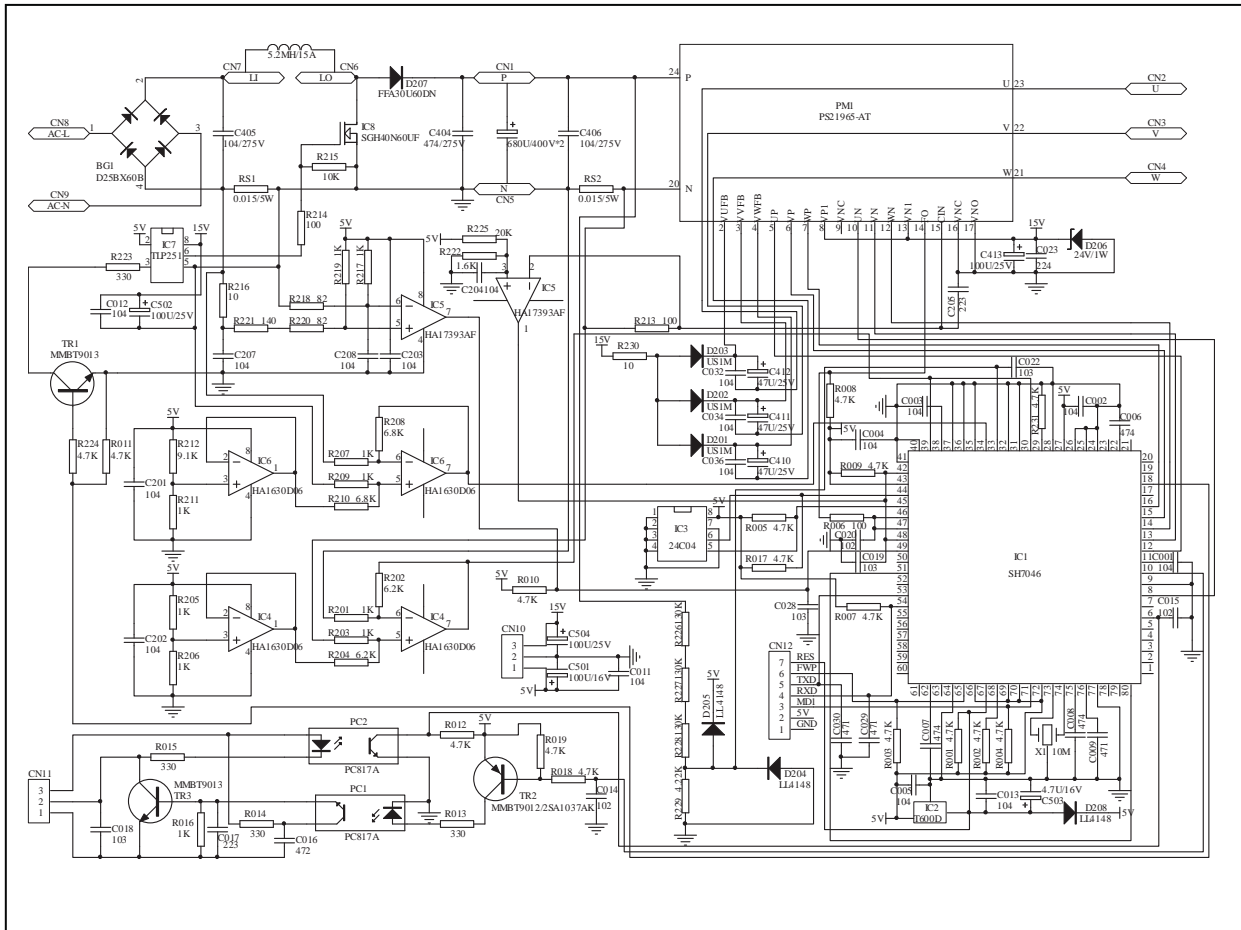

1 1

# Sincere Forever

## Haier Group

---

Haier Industrial Park, No.1, Haier Road

266101, Qingdao, China\_

Http: //www.haier.com

Edited by : Liu Yujuan

Yang Xiaodong

Signed by : Yang Wenjun

Approved by: He shiquan



# REMOVAL PROCEDURE

## Wall Mounted Type DC Inverter FREE MATCH N-Series SERIES:2U40S2SC1FA



### **WARNING**

This service information is designed for experienced repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product. Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or Repair the product or products dealt with in this service information by anyone else could result in serious injury or death


2014 (Qingdao Haier Air Conditioner General corp. , Ltd)  
All rights reserved. Unauthorized copying and distribution is a violation of law



1 Removal of Outdoor panel


Procedure







Warning Be sure to wait 10 minutes or more after turning off all power supplies before disassembling work.

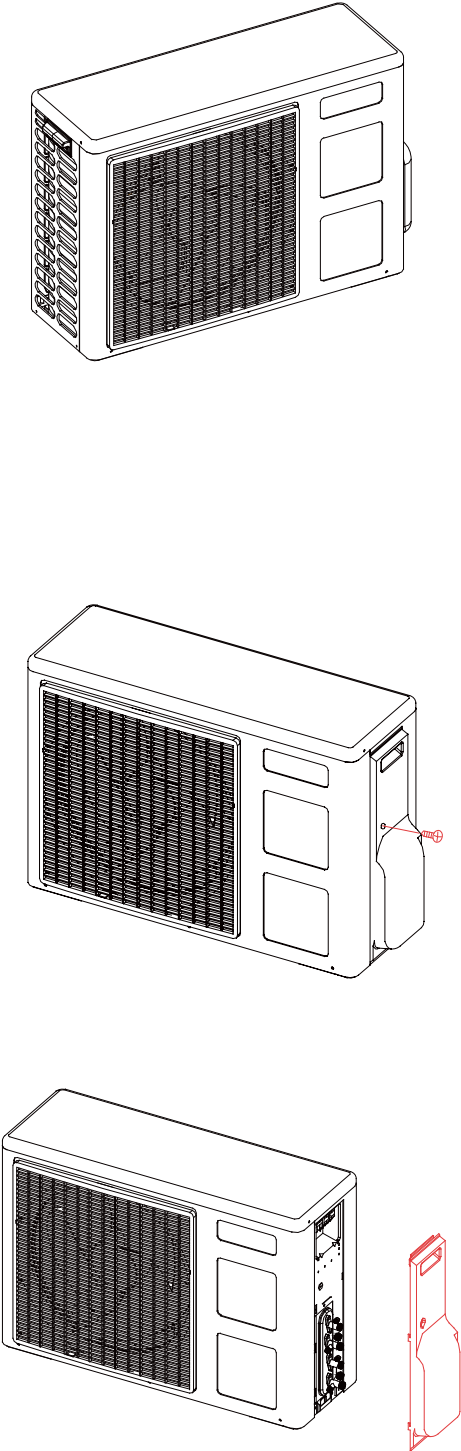Step	Procedure	Points
1. Features		
1	<div>Loosen the screw of the stop valve cover. Pull down the stop valve cover and remove it.</div> <div></div>	<div>■ Be careful not to cut your finger by the fins of the heat exchanger.</div> <div>■ The stop valve cover is united with the shelter.</div> <div>■ When assembling, make sure to fit the 5 hooks.</div>

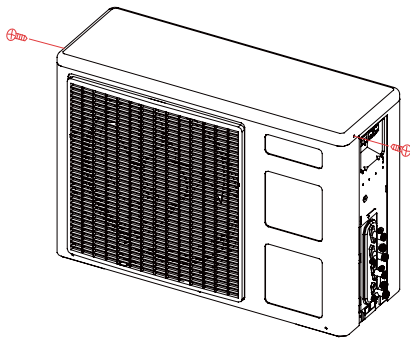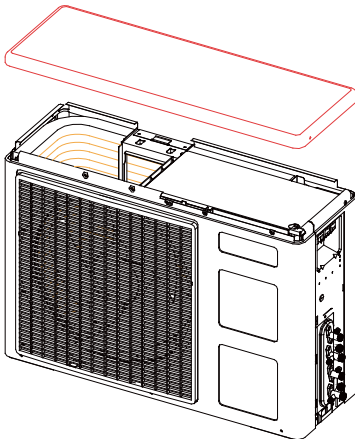Step	Procedure		Points
2. Remove the panels.			
1	Loosen the top panel screws		
2	Lift the top panel		

Step	Procedure	Points
3	<div>Loosen the screws and pull the panel</div> <div></div>	

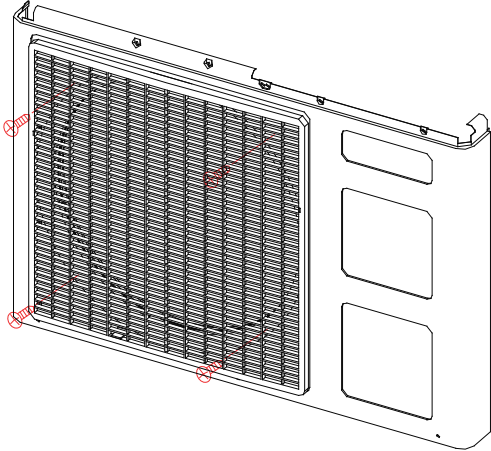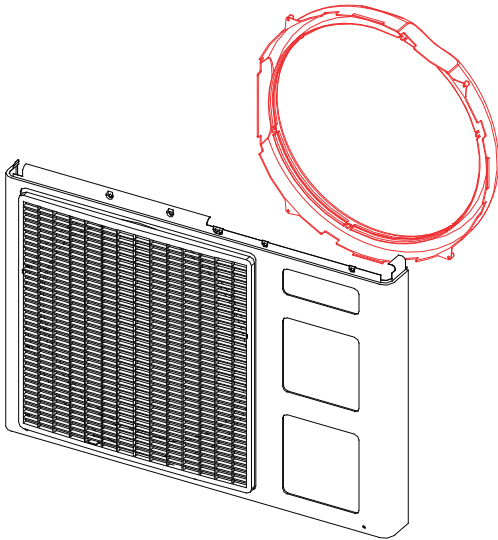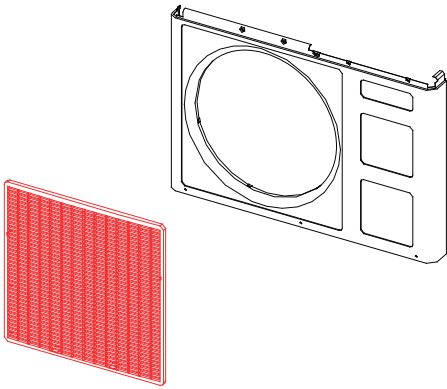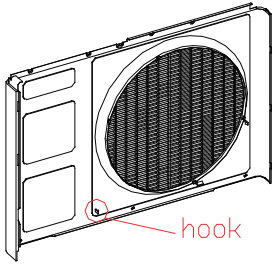Step	Procedure		Points
3.	Remove the outlet grille		
	1 Unscrew the four marked screws		
	2 Pull the wind circle		
3	Remove the inlet grill		Push the hooks first
			




2 Removal of Electrical Box

Procedure



Warning

Be sure to wait 10 minutes or more after turning off all power supplies before disassembling work.



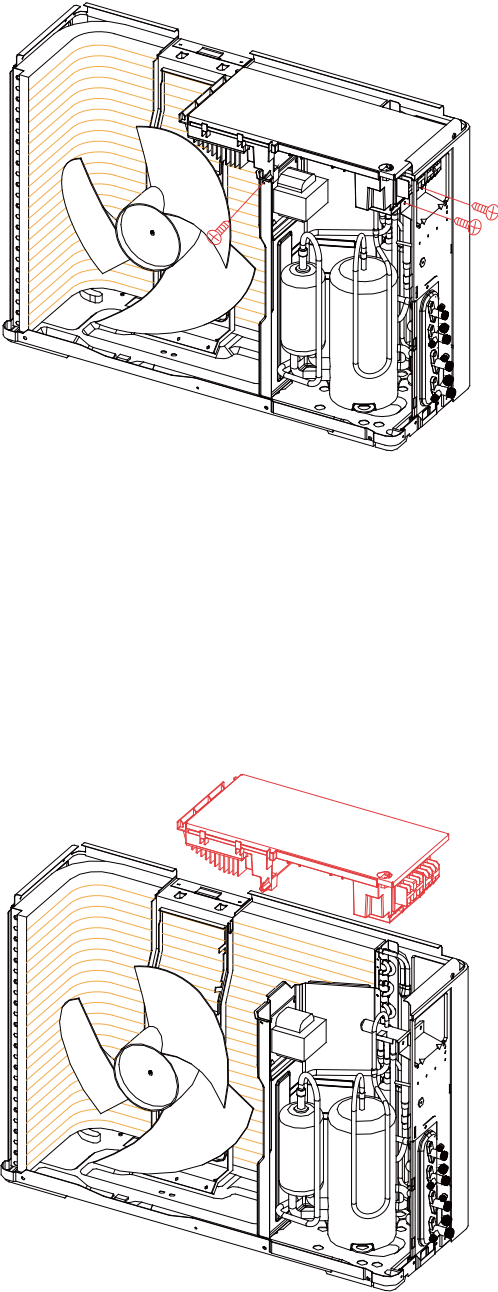
Step	Procedure	Points
1	<div>Remove the fixing screws Then lift the electrical box</div> 	


### 3 Removal of Fan and Fan Motor

Procedure



**Warning** Be sure to wait 10 minutes or more after turning off all power supplies before disassembling work.

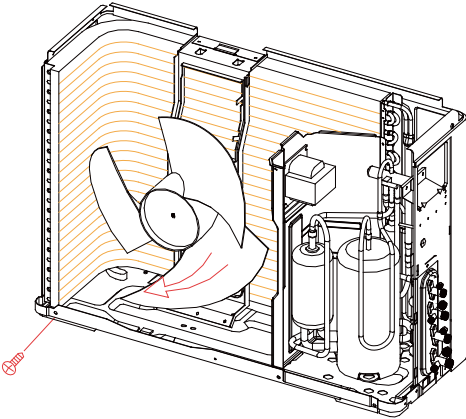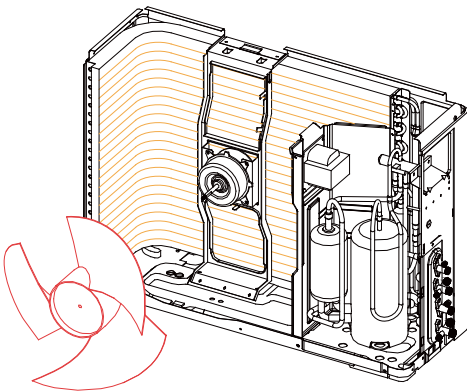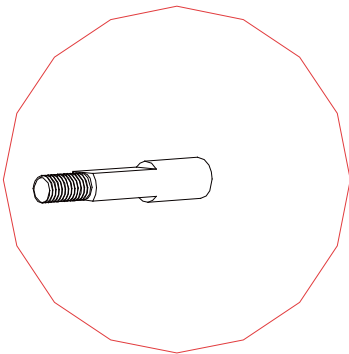Step	Procedure	Points
1	<p>Loosen the fixing screw and remove the fan</p>  	 <ul style="list-style-type: none"><li>■ Put the lead wire through the back of the motor when assembling. (so as not to be entangled with the propeller fan)</li></ul>

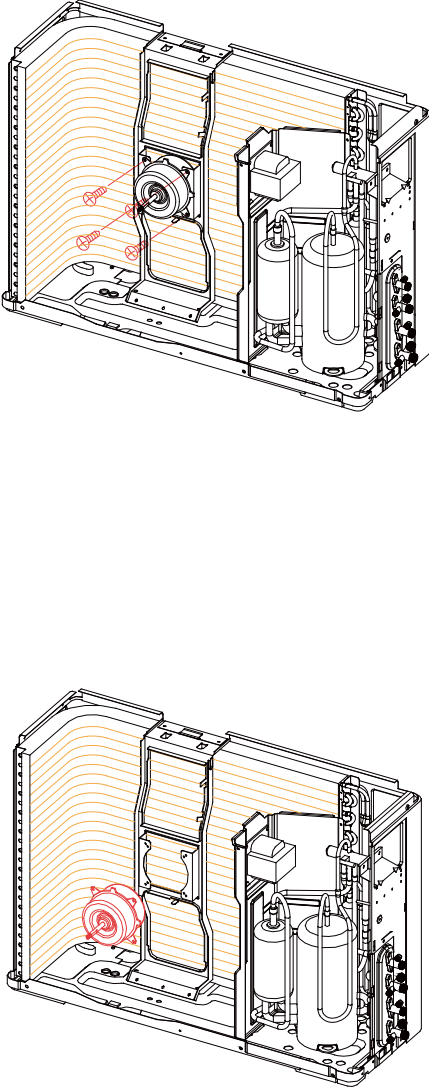
Step	Procedure		Points
2	Loosen the fixing screws and remove the motor		

4 Removal of Fan Motor Bracket and Partition

Procedure




Warning Be sure to wait 10 minutes or more after turning off all power supplies fore disassembling work.

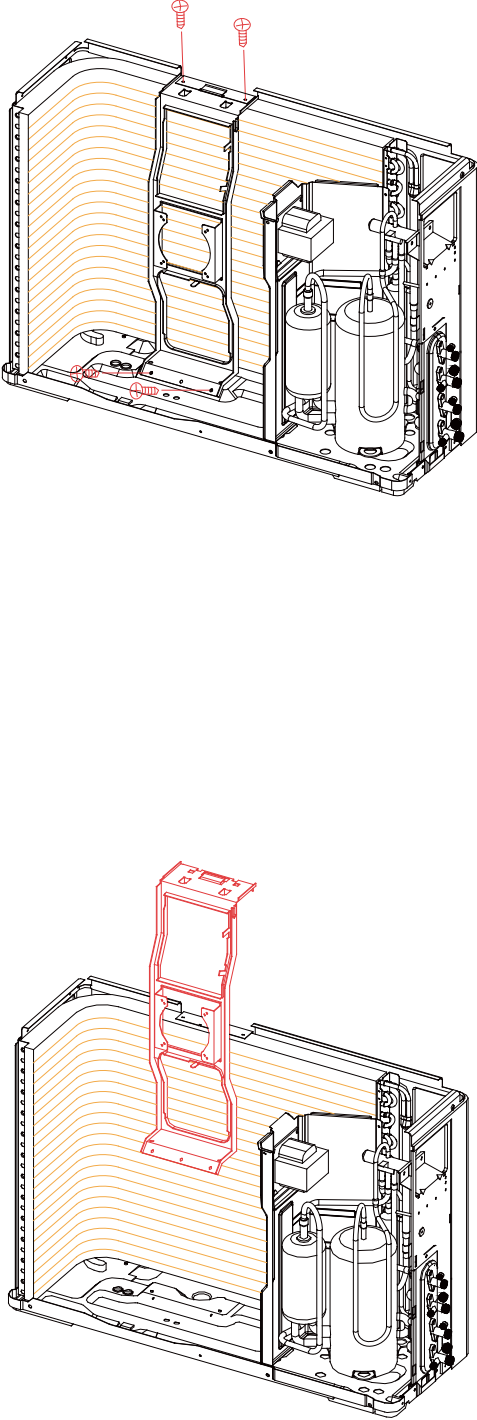Step	Procedure	Points
1	<div><div><div>Loosen the fixing screws and lift the fan motor bracket.</div><div></div></div></div>	


Step	Procedure	Points
3	Loosen the screw and remove the reactor	
4	The partition plate has a hook on the lower side.Lift and pull the partition plate to remove.	■ When assembling ,fit the lower hook into the bottom frame .




5 Removal of Compressor and Heat Exchanger


Procedure



Warning Be sure to wait 10 minutes or more after turning off all power supplies fore disassembling work.

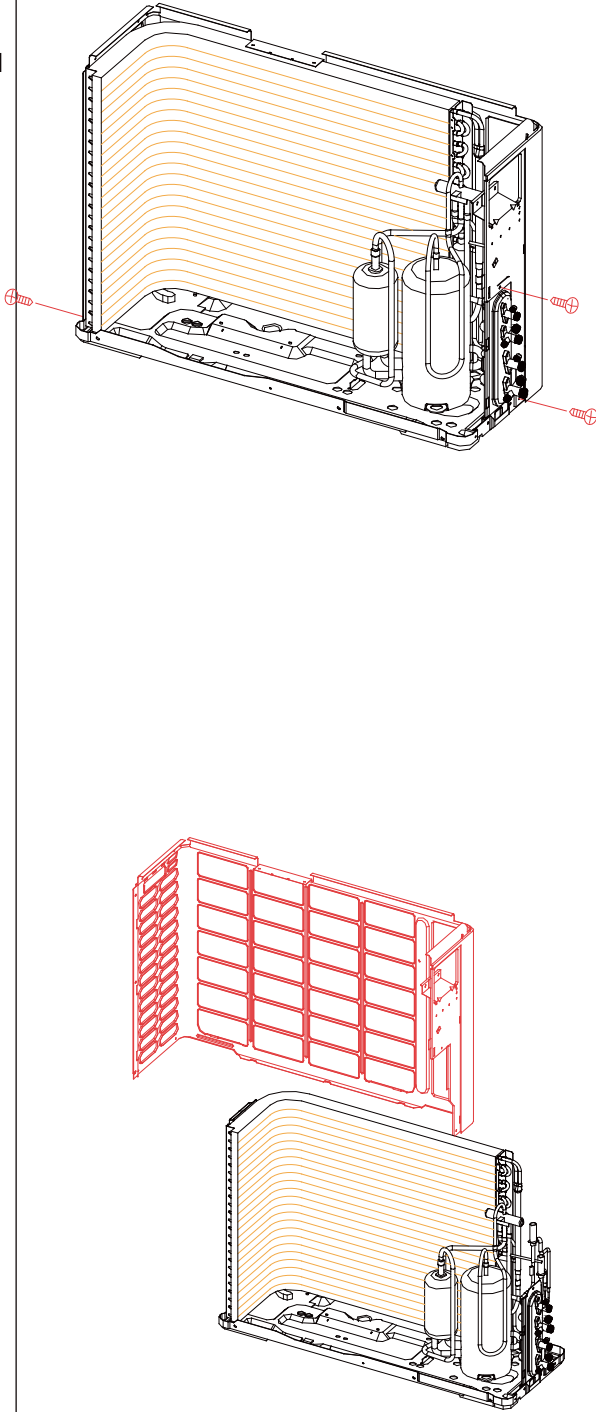Step	Procedure		Points
1	Loosen the marked screws and pull out the backgurd		

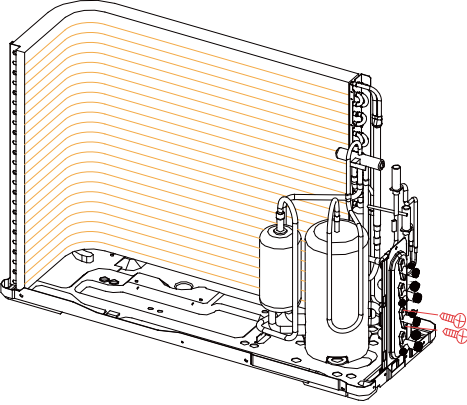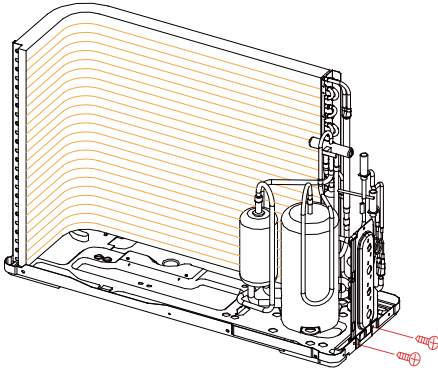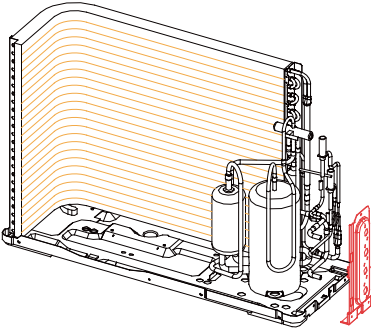Step	Procedure		Points
2	Loosen the marked screws and remove the stop valves		
3	Loosen the marked screws and remove the stop valves bracket	 	

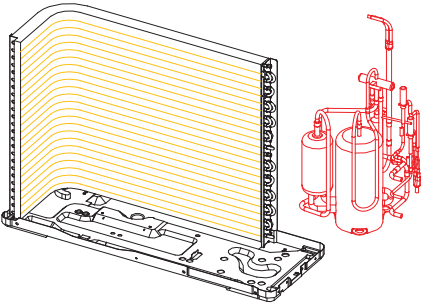Step	Procedure		Points
4	Remove the compressor and pipe assy		
5	Remove the condenser	